

PRW Series

Cylindrical Cable Connector Type Proximity Sensor

■ Features

- Shorten the time of maintenance with the body
- Improved the noise immunity with dedicated IC
- Built-in reverse polarity protection circuit (DC 3-wire type)
- Built-in surge protection circuit
- Built-in output short over current protection circuit
- IP67 protection structure (IEC standard)
- Replaceable for micro switches and limit switches

 Please read "Safety Considerations" in the instruction manual before using.



■ Specifications

• DC 2-wire type

※ When the □ model name is X, it is non-polarity model.

Model	PRWT08-1.5DO PRWT08-1.5DC PRWT08-1.5DO-I PRWT08-1.5DC-I PRWT08-1.5DO-V PRWT08-1.5DC-V PRWT08-1.5DO-IV PRWT08-1.5DC-IV	PRWT08-2DO PRWT08-2DC PRWT08-2DO-I PRWT08-2DC-I PRWT08-2DO-V PRWT08-2DC-V PRWT08-2DO-IV PRWT08-2DC-IV	PRWT12-2□DO PRWT12-2□DC PRWT12-2□DO-I PRWT12-2□DC-I	PRWT12-4□DO PRWT12-4□DC PRWT12-4□DO-I PRWT12-4□DC-I	PRWT18-8□DO PRWT18-8□DC PRWT18-8□DO-I PRWT18-8□DC-I	PRWT18-8□DO PRWT18-8□DC PRWT18-8□DO-I PRWT18-8□DC-I	PRWT30-10□DO PRWT30-10□DC PRWT30-10□DO-I PRWT30-10□DC-I PRWT30-10DO-V PRWT30-10DC-IV	PRWT30-15□DO PRWT30-15□DC PRWT30-15□DO-I PRWT30-15□DC-I PRWT30-15DO-V PRWT30-15DC-IV								
Diameter of sensing side	8mm		12mm		18mm		30mm									
Sensing distance	1.5mm		2mm		4mm	5mm	8mm	10mm								
Installation	Shield (flush)		Non-shield (non-flush)	Shield (flush)	Non-shield (non-flush)	Shield (flush)	Non-shield (non-flush)	Non-shield (non-flush)								
Hysteresis	Max. 10% of sensing distance															
Standard sensing target	8×8×1mm (iron)		12×12×1mm (iron)		18×18×1mm (iron)	25×25×1mm (iron)	30×30×1mm (iron)	45×45×1mm (iron)								
Setting distance	0 to 1.05mm	0 to 1.4mm	0 to 2.8mm		0 to 3.5mm	0 to 5.6mm	0 to 7mm	0 to 10.5mm								
Power supply (operation voltage)	12-24VDC== (10-30VDC==)															
Leakage current	Max. 0.6mA															
Response frequency ^{※1}	1.5kHz	1kHz	1.5kHz	500Hz		350Hz	400Hz	200Hz								
Residual voltage ^{※2}	Max. 3.5V (non-polarity type is max. 5V)															
Affection by Temp.	Max. ±10% for sensing distance at ambient temperature 20°C (for PRWT08 Series: ±20% max.)															
Control output	2 to 100mA															
Insulation resistance	Over 50MΩ (at 500VDC megger)															
Dielectric strength	1,500VAC 50/60Hz for 1 min															
Vibration	1mm amplitude at frequency 10 to 55Hz (for 1 min) in each X, Y, Z direction for 2 hours															
Shock	500m/s ² (approx. 50G) in each X, Y, Z direction for 3 times															
Indicator	Operation indicator: Red LED															
Environment	Ambient temperature	-25 to 70°C, storage: -30 to 80°C														
	Ambient humidity	35 to 95%RH, storage: 35 to 95%RH														
Protection circuit	Surge protection circuit		Surge protection circuit, output short over current protection circuit													
Protection structure	IP67 (IEC standard)															
Material	Case/Nut: Nickel plated brass, Washer: Nickel plated iron, Sensing surface: Heat-resistant Acrylonitrile butadiene styrene, Standard cable (black): Polyvinyl chloride (PVC), Oil resistant cable (gray): Oil resistant polyvinyl chloride (PVC)															
Cable	Ø4mm, 2-wire, 300mm, M12 connector (AWG22, Core diameter: 0.08mm, Number of cores: 60, Insulator diameter: Ø1.25mm)				Ø5mm, 2-wire, 300mm, M12 connector											
Approval																
Weight ^{※3}	Approx. 44g (approx. 32g)	Approx. 54g (approx. 42g)	Approx. 70g (approx. 58g)	Approx. 134g (approx. 122g)												

※1: The response frequency is the average value. The standard sensing target is used and the width is set as 2 times of the standard sensing target, 1/2 of the sensing distance for the distance.

※2: Before using non-polarity type, check the condition of connected device because residual voltage is 5V.

※3: The weight includes packaging. The weight in parenthesis is for unit only.

※Please fasten the vibration part with PTFE type.

※The □ of model name is for power type. 'D' is 12-24VDC, 'X' is non-polarity 12-24VDC.

※The last 'V' of model name is for the model with oil-resistance reinforced cable.

※Environment resistance is rated at no freezing or condensation.

Cylindrical Cable Connector Type

■ Specifications

• DC 3-wire type


Model	PRW08-1.5DN	PRW08-2DN	PRW12-2DN	PRW12-4DN	PRW18-5DN	PRW18-8DN	PRW30-10DN	PRW30-15DN									
	PRW08-1.5DP	PRW08-2DP					PRW30-10DP	PRW30-15DP									
PRW08-1.5DN2	PRW08-2DN2	PRW08-2DP2	PRW12-2DN	PRW12-4DN	PRW18-5DN2	PRW18-8DN2	PRW30-10DN2	PRW30-15DN2									
PRW08-1.5DP2	PRW08-2DP2	PRW08-2DN-V	PRW12-2DP	PRW12-4DP	PRW18-5DP2	PRW18-8DP2	PRW30-10DP2	PRW30-15DP2									
PRW08-1.5DN-V	PRW08-2DP-V	PRW08-2DN-V	PRW12-2DN2	PRW12-4DN2	PRWL18-5DN	PRWL18-8DN	PRW30-10DN-V	PRW30-15DN-V									
PRW08-1.5DP-V	PRW08-2DP-V	PRW08-2DN2-V	PRW12-2DP2	PRW12-4DP2	PRWL18-5DP	PRWL18-8DP	PRW30-10DP2-V	PRW30-15DP2-V									
PRW08-1.5DN2-V	PRW08-2DP2-V	PRW08-2DN2-V			PRWL18-5DN2	PRWL18-8DN2	PRW30-10DN2-V	PRW30-15DN2-V									
PRWL08-1.5DN	PRWL08-2DN	PRWL08-2DP			PRWL18-5DP2	PRWL18-8DP2	PRWL30-10DN	PRWL30-15DN									
PRWL08-1.5DP	PRWL08-2DP	PRWL08-2DN2					PRWL30-10DP	PRWL30-15DP									
PRWL08-1.5DN2	PRWL08-2DN2	PRWL08-2DP2					PRWL30-10DN2	PRWL30-15DN2									
PRWL08-1.5DP2	PRWL08-2DP2						PRWL30-10DP2	PRWL30-15DP2									
Diameter of sensing side	8mm		12mm		18mm		30mm										
Sensing distance	1.5mm	2mm		4mm	5mm	8mm	10mm	15mm									
Installation	Shield (flush)	Non-shield (non-flush)	Shield (flush)	Non-shield (non-flush)	Shield (flush)	Non-shield (non-flush)	Shield (flush)	Non-shield (non-flush)									
Hysteresis	Max. 10% of sensing distance																
Standard sensing target	8×8×1mm (iron)		12×12×1mm (iron)		18×18×1mm (iron)	25×25×1mm (iron)	30×30×1mm (iron)	45×45×1mm (iron)									
Setting distance	0 to 1.05mm	0 to 1.4mm		0 to 2.8mm	0 to 3.5mm	0 to 5.6mm	0 to 7mm	0 to 10.5mm									
Power supply (operation voltage)	12-24VDC== (10-30VDC==)																
Current consumption	Max. 10mA																
Response frequency ^{※1}	1.5kHz	1kHz	1.5kHz	500Hz	350Hz	400Hz	200Hz										
Residual voltage	Max. 2V		Max. 1.5V														
Affection by Temp.	Max. ±10% for sensing distance at ambient temperature 20°C (for PRW(L)08 series: ±20% max.)																
Control output	200mA																
Insulation resistance	Over 50MΩ (at 500VDC megger)																
Dielectric strength	1,500VAC 50/60Hz for 1 min																
Vibration	1mm amplitude at frequency 10 to 55Hz (for 1 min) in each X, Y, Z direction for 2 hours																
Shock	500m/s ² (approx. 50G) in each X, Y, Z direction for 3 times																
Indicator	Operation indicator: Red LED																
Environ- ment	Ambient temperature	-25 to 70°C, storage: -30 to 80°C															
	Ambient humidity	35 to 95%RH, storage: 35 to 95%RH															
Protection circuit	Surge protection circuit, Reverse polarity protection circuit, output short over current protection circuit																
Protection structure	IP67 (IEC standard)																
Material	Case/Nut: Nickel plated brass, Washer: Nickel plated iron, Sensing surface: Heat-resistant Acrylonitrile butadiene styrene Standard cable (black): Polyvinyl chloride (PVC), Oil resistant cable (gray): Oil resistant polyvinyl chloride (PVC)																
Cable	Ø4mm, 3-wire, 300mm, M12 connector (AWG22, Core diameter: 0.08mm, Number of cores: 60, Insulator diameter: Ø1.25mm)		Ø5mm, 3-wire, 300mm, M12 connector														
Approval	CE																
Weight ^{※2}	PRW: Approx. 44g (approx. 32g) PRWL: Approx. 46g (approx. 34g)	Approx. 54g (approx. 42g)		PRW: Approx. 70g (approx. 58g) PRWL: Approx. 90g (approx. 78g)	PRW: Approx. 134g (approx. 122g) PRWL: Approx. 195g (approx. 158g)												

※1: The response frequency is the average value. The standard sensing target is used and the width is set as 2 times of the standard sensing target, 1/2 of the sensing distance for the distance.

※2: The weight includes packaging. The weight in parenthesis is for unit only.

※The last 'V' of model name is for the model with oil-resistance reinforced cable.

※Environment resistance is rated at no freezing or condensation.

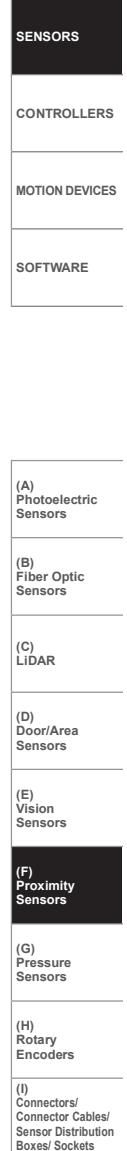

PRW Series

- AC 2-wire type

Model	PRW12-2AO PRW12-2AC	PRW12-4AO PRW12-4AC	PRW18-5AO PRW18-5AC PRWL18-5AO PRWL18-5AC	PRW18-8AO PRW18-8AC PRWL18-8AO PRWL18-8AC	PRW30-10AO PRW30-10AC PRWL30-10AO PRWL30-10AC	PRW30-15AO PRW30-15AC PRWL30-15AO PRWL30-15AC									
Diameter of sensing side	12mm		18mm		30mm										
Sensing distance	2mm	4mm	5mm	8mm	10mm	15mm									
Installation	Shield (flush)	Non-shield (non-flush)	Shield (flush)	Non-shield (non-flush)	Shield (flush)	Non-shield (non-flush)									
Hysteresis	Max. 10% of sensing distance														
Standard sensing target	12×12×1mm (iron)		18×18×1mm (iron)	25×25×1mm (iron)	30×30×1mm (iron)	45×45×1mm (iron)									
Setting distance	0 to 1.4mm	0 to 2.8mm	0 to 3.5mm	0 to 5.6mm	0 to 7mm	0 to 10.5mm									
Power supply (operation voltage)	100-240VAC～(85-264VAC～)														
Leakage current	Max. 2.5mA														
Response frequency ^{※1}	20Hz														
Residual voltage	Max. 10V														
Affection by Temp.	Max. ±10% for sensing distance at ambient temperature 20°C														
Control output	5 to 150mA		5 to 200mA												
Insulation resistance	Over 50MΩ (at 500VDC megger)														
Dielectric strength	2,500VAC 50/60Hz for 1 min														
Vibration	1mm amplitude at frequency 10 to 55Hz (for 1 min) in each X, Y, Z direction for 2 hours														
Shock	500m/s ² (approx. 50G) in each X, Y, Z direction for 3 times														
Indicator	Operation indicator: Red LED														
Environment	Ambient temperature: -25 to 70°C, storage: -30 to 80°C														
	Ambient humidity: 35 to 95%RH, storage: 35 to 95%RH														
Protection circuit	Surge protection circuit														
Protection structure	IP67 (IEC standard)														
Material	Case/Nut: Nickel plated brass, Washer: Nickel plated iron, Sensing surface: Heat-resistant Acrylonitrile butadiene styrene, Standard cable (black): Polyvinyl chloride (PVC)														
Cable	Ø4mm, 2-wire, 300mm, M12 connector	Ø5mm, 2-wire, 300mm, M12 connector													
	AWG22, Core diameter: 0.08mm, Number of cores: 60, Insulator diameter: Ø1.25mm														
Approval	CE														
Weight ^{※2}	Approx. 54g (approx. 42g)	PRW: Approx. 78g (approx. 66g) PRWL: Approx. 90g (approx. 78g)		PRW: Approx. 134g (approx. 122g) PRWL: Approx. 195g (approx. 158g)											

※1: The response frequency is the average value. The standard sensing target is used and the width is set as 2 times of the standard sensing target, 1/2 of the sensing distance for the distance.

※2: The weight includes packaging. The weight in parenthesis is for unit only.

※ The last 'V' of model name is for the model with oil-resistance reinforced cable.

※ Environment resistance is rated at no freezing or condensation.


Cylindrical Cable Connector Type

Dimensions

- PRWT08-1.5D□(-I)
- PRW08-1.5D□



- PRWT08-2D□(-I)
- PRW08-2D□

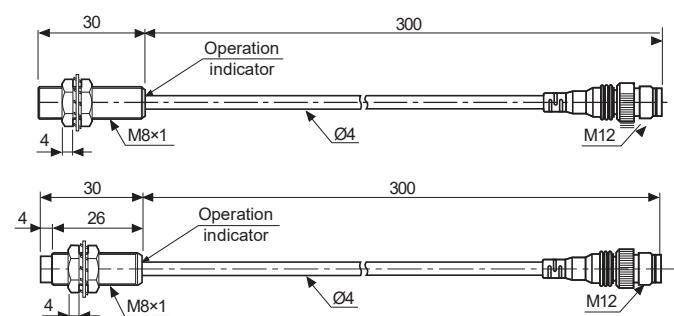


SENSORS
CONTROLLERS
MOTION DEVICES
SOFTWARE

- PRWT12-2D□(-I)
- PRW12-2D□



- PRWT12-4D□(-I)
- PRW12-4D□

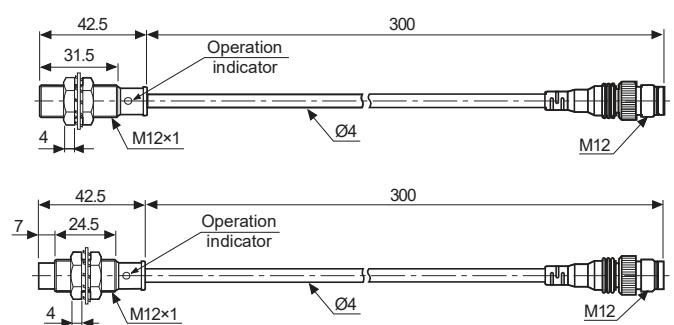


(A) Photoelectric Sensors
(B) Fiber Optic Sensors
(C) LiDAR
(D) Door/Area Sensors
(E) Vision Sensors
(F) Proximity Sensors

- PRWT18-5D□(-I)
- PRW18-5D□





- PRWT18-8D□(-I)
- PRW18-8D□

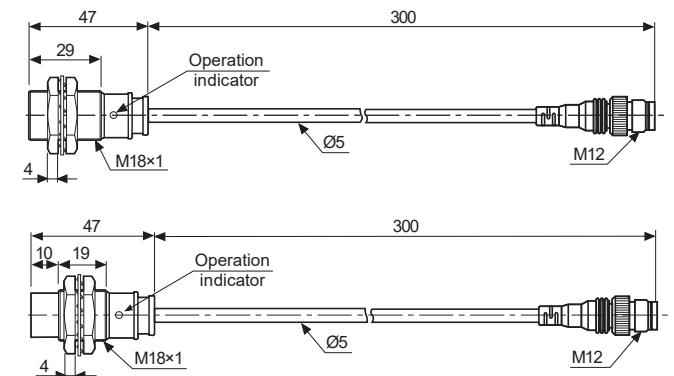


(G) Pressure Sensors
(H) Rotary Encoders
(I) Connectors/Connector Cables/Sensor Distribution Boxes/ Sockets


- PRWT30-10D□(-I)
- PRW30-10D□

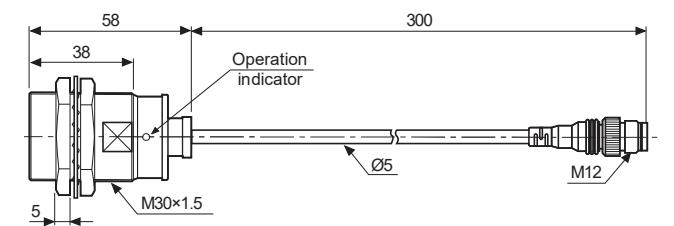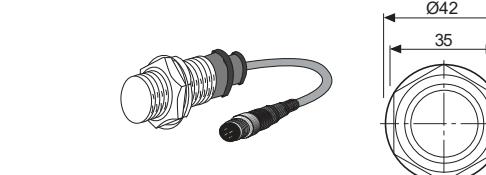

- PRWT30-15D□(-I)
- PRW30-15D□

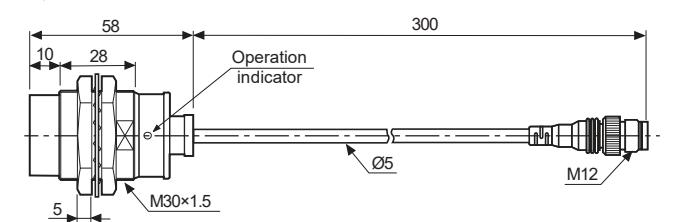


- PRWL08-1.5D□

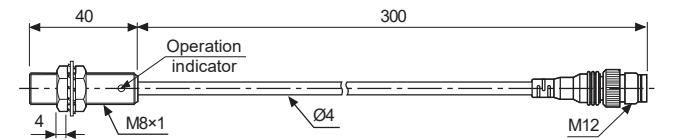

PRW Series



□ Dimensions

- PRWL08-2D □



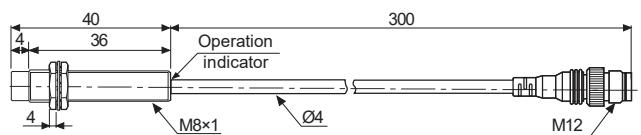


(unit: mm)




- PRWL18-5D □ • PRWL18-5A □

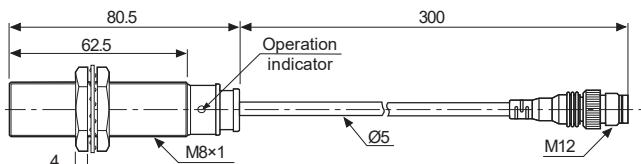




- PRWL18-8D □ • PRWL18-8A □

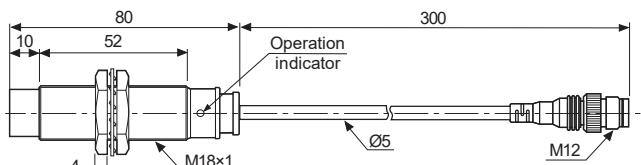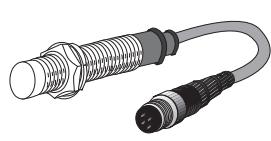



- PRWL30-10D □ • PRWL30-10A □

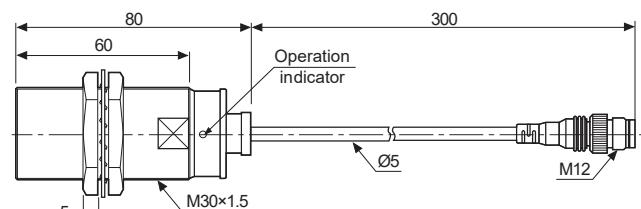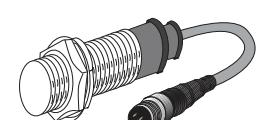


- PRWL30-15D □ • PRWL30-15A □

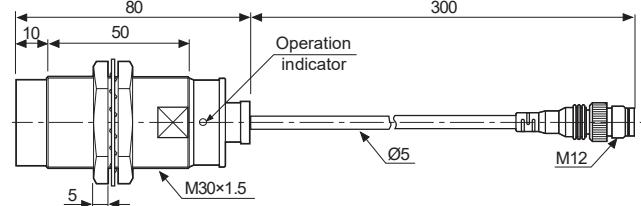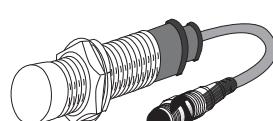


- PRW12-2A □

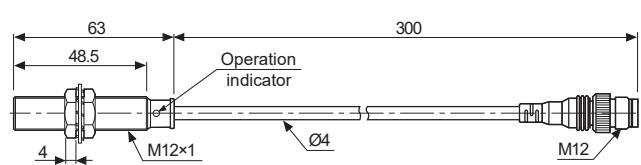


- PRW12-4A □

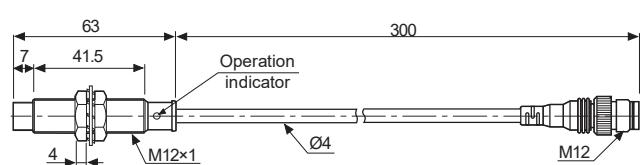

- PRW18-5A □

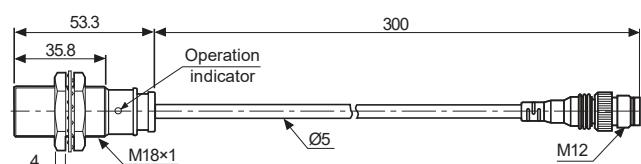


- PRW18-8A □

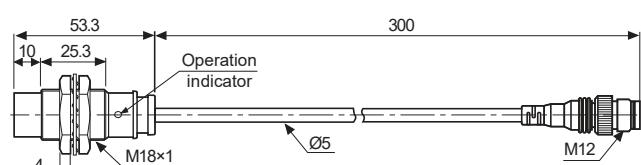

Cylindrical Cable Connector Type



■ Dimensions

- PRW30-10A



(unit:mm)



- PRW30-15A

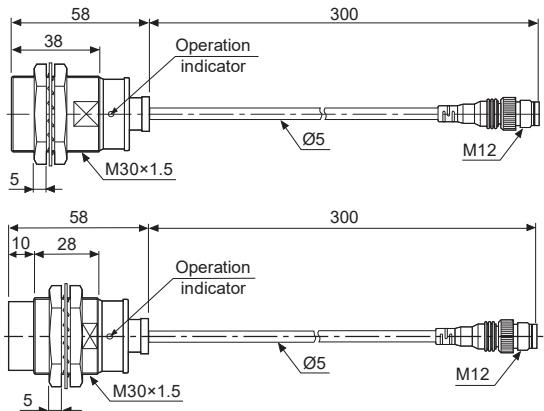

SENSORS
CONTROLLERS
MOTION DEVICES
SOFTWARE



■ Control Output Diagram and Load Operation

◎ DC 2-wire type

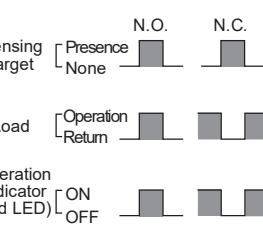
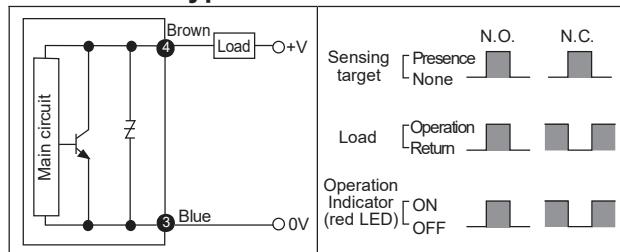


◎ DC 3-wire type



NPN output type

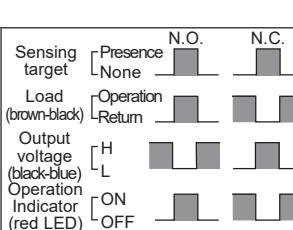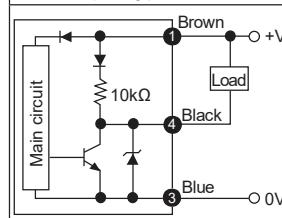

◎ AC 2-wire type

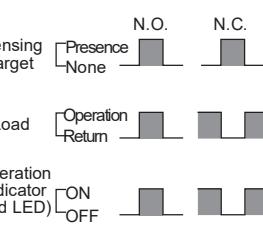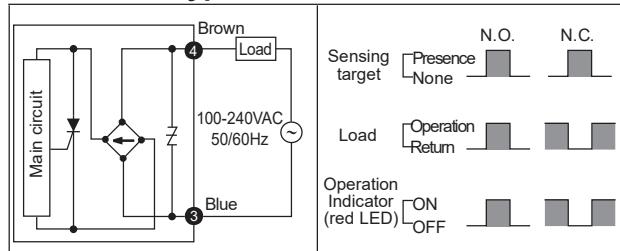

PNP output type

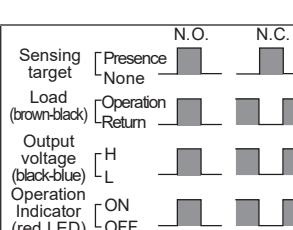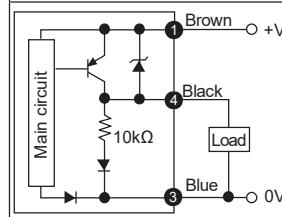


※ The number in a circle is pin no. of connector.

■ Wiring Diagram

◎ DC 2-wire type (standard type)


Normally Open (N.O.) / Normally Closed (N.C.)

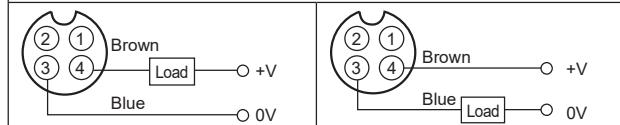

※ Pin ①, ② are not used terminals.

※ When using DC 3-wire type of connector cable, black (12-24VDC) and blue (0V) cables can be used.

◎ DC 3-wire type

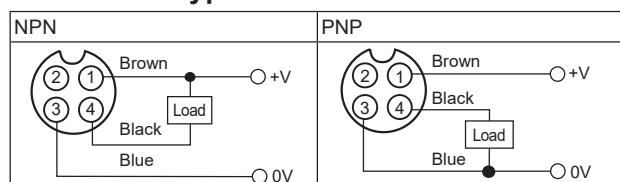

※ Please fasten the cleat of connector not to shown the thread.


(0.39 to 0.49N·m)

※ Please fasten the vibration part with PTFE tape.


※ For more information about cable and specification, refer to the (I) Connectors/Cable Connectors/Sensor Distribution Boxes/Sockets

◎ DC 2-wire type (IEC standard type)

Normally Open (N.O.)

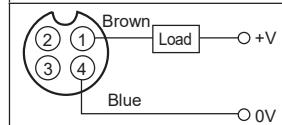

Normally Closed (N.C.)

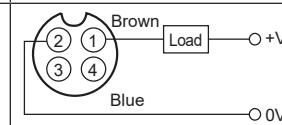



※ ②,③ of N.O. type and ③,④ of N.C. type are not used terminals.
※ The type, pin arrangement of connector based upon IEC standard is being developed.

※ Please put "I" behind of standard type for purchasing IEC standard product. E.g.)PRWT12-4DO-I

※ Please put "I" behind of model name for selecting proximity sensor by IEC standard. E.g.)CID2-2-I, CLD2-2-I

◎ AC 2-wire type

Normally Open (N.O.) / Normally Closed (N.C.)

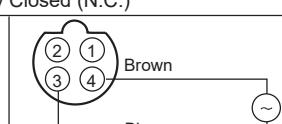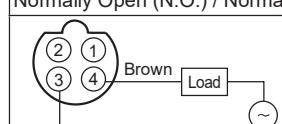

※ In case of AC switching type, ② and ③, ① and ④ are connected to each other inside.

(A) Photoelectric Sensors

(B) Fiber Optic Sensors

(C) LiDAR

(D) Door/Area Sensors

(E) Vision Sensors

(F) Proximity Sensors


(G) Pressure Sensors

(H) Rotary Encoders


(I) Connectors/Connector Cables/Sensor Distribution Boxes/Sockets

PRW Series


■ Sensing Distance Feature Data by Target Material and Size

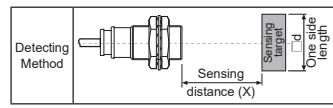


● PRWT08-1.5D □

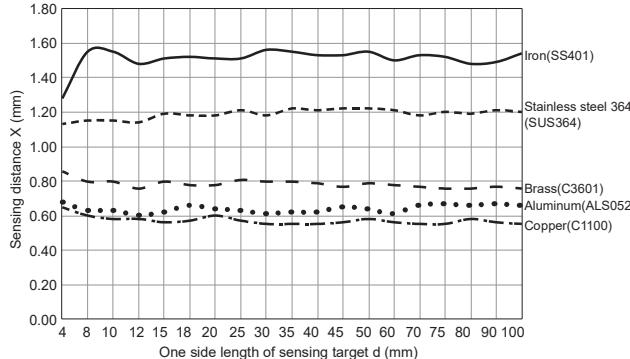


● PRWT08-2D □

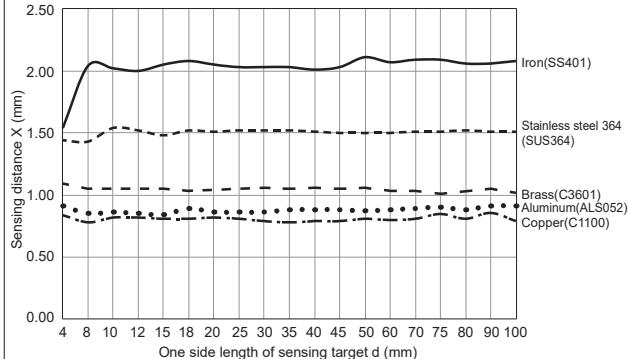


● PRWT12-2D □, PRW12-2A □

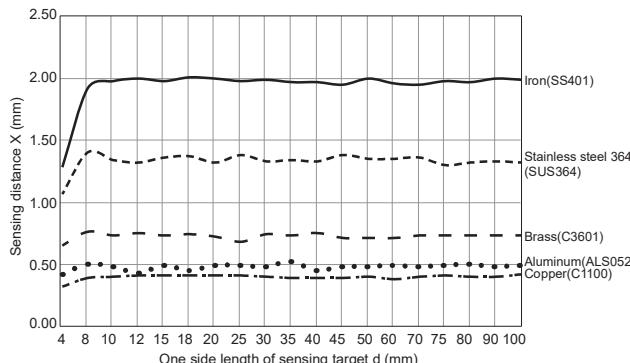


● PRWT12-4D □, PRW12-4A □

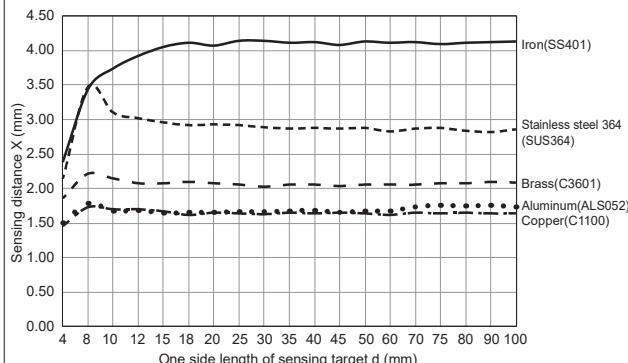


● PRWT18-5D □, PRW(L)18-5A □

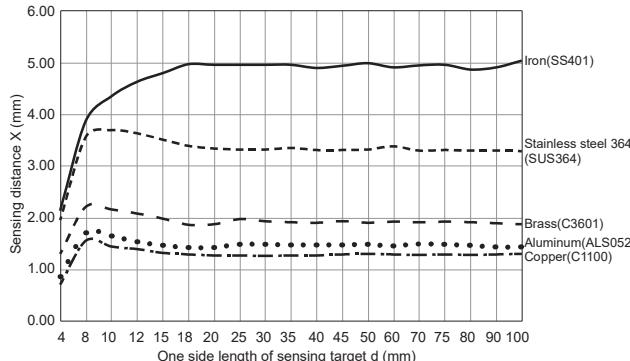


● PRWT18-8D □, PRW(L)18-8A □

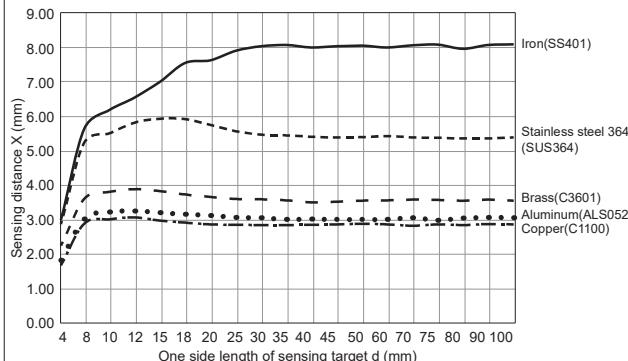

● PRWT30-10D □, PRW(L)30-10A □

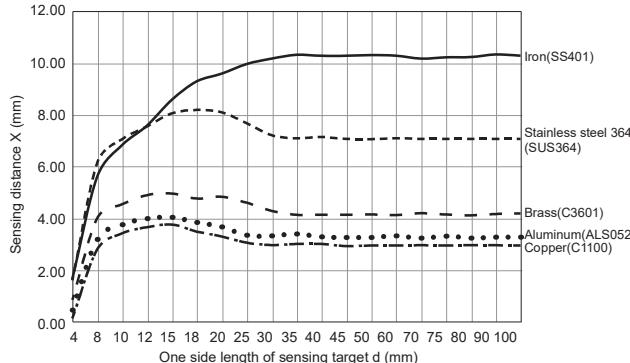


● PRWT30-15D □, PRW(L)30-15A □

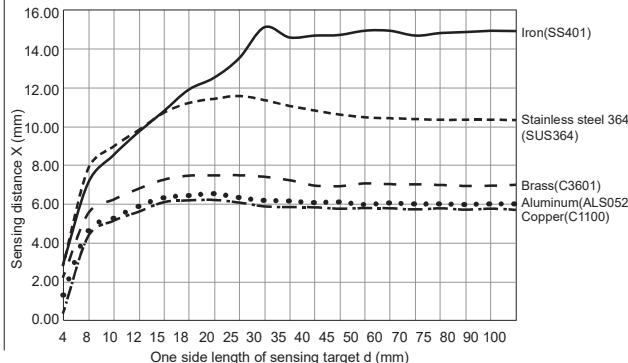


Cylindrical Cable Connector Type


Sensing Distance Feature Data by Target Material and Size

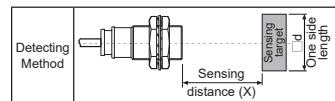


● PRW(L)08-1.5D □

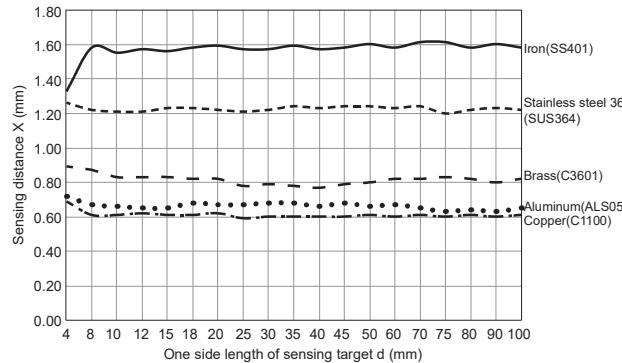


● PRW(L)08-2D □

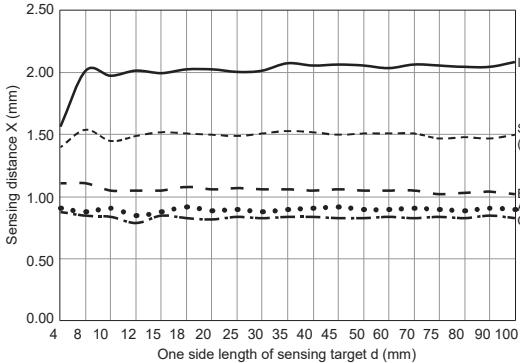


● PRW12-2D □

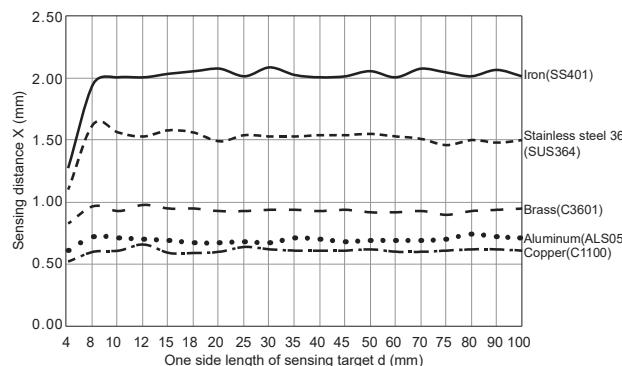


● PRW12-4D □

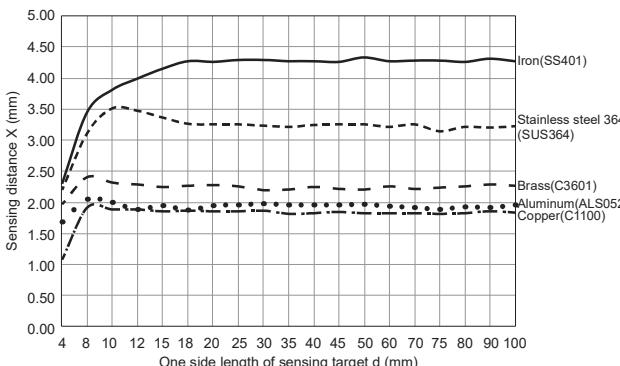


● PRW(L)18-5D □

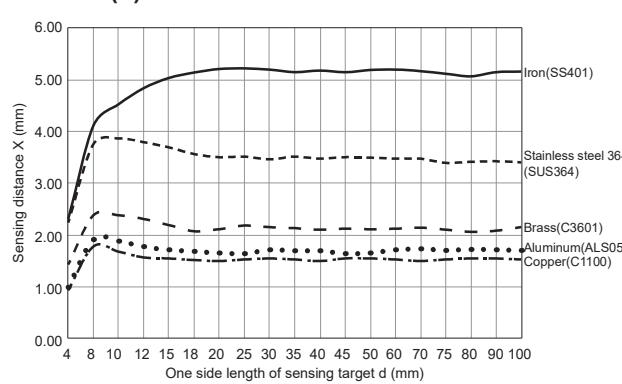


● PRW(L)18-8D □

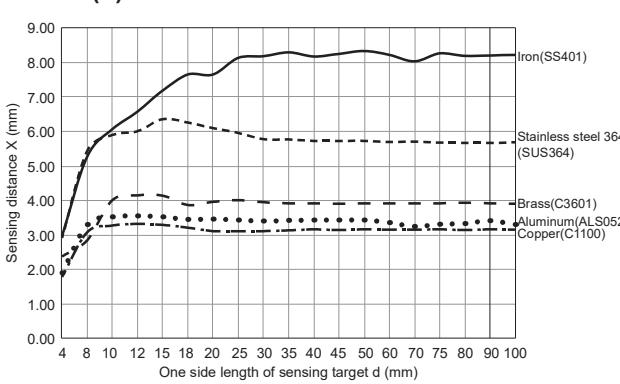

● PRW(L)30-10D □

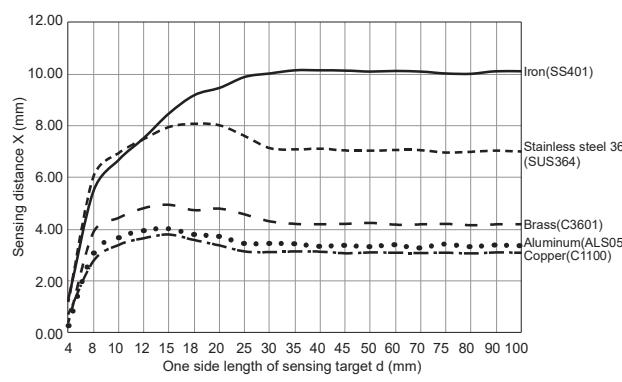

● PRW(L)30-15D □

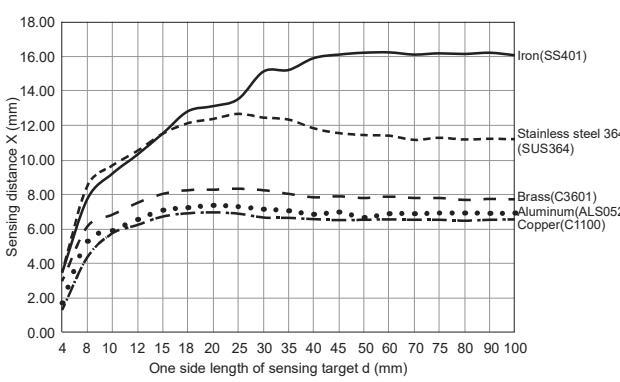

SENSORS

CONTROLLERS

MOTION DEVICES

SOFTWARE

(A) Photoelectric Sensors

(B) Fiber Optic Sensors

(C) LiDAR

(D) Door/Area Sensors

(E) Vision Sensors

(F) Proximity Sensors


(G) Pressure Sensors

(H) Rotary Encoders


(I) Connectors/Connector Cables/Sensor Distribution Boxes/Sockets

PRW Series


■ Sensing Distance Feature Data by Parallel (Left/Right) Movement

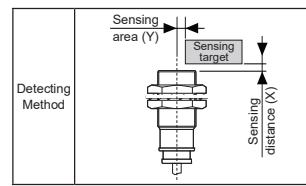


● PRWT08-1.5D□/2D□

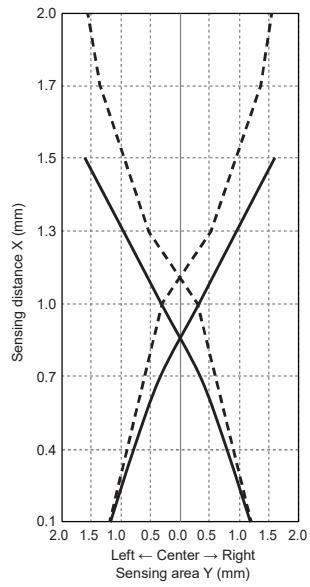


● PRWT12-2D□/4D□, PRW12-2A□/4A□

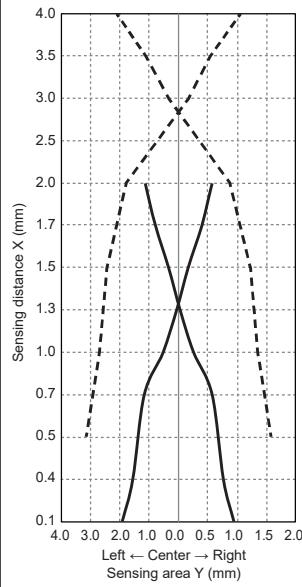


● PRWT18-5D□/8D□, PRW(L)18-5A□/8A□

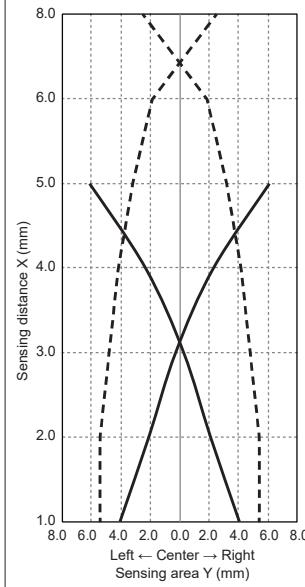


● PRWT30-10D□/15D□, PRW(L)30-10A□/15A□

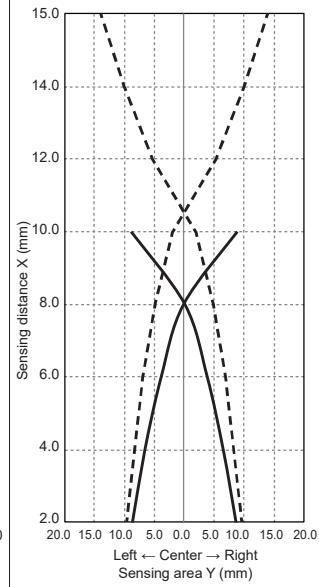


● PRW(L)08-1.5D□/2D□

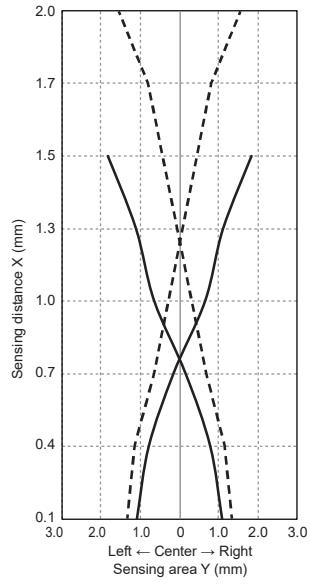


● PRW12-2D□/4D□

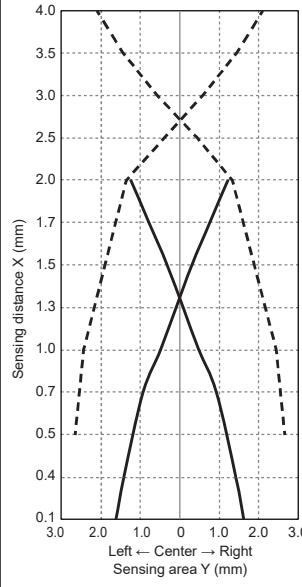

● PRW(L)18-5D□/8D□

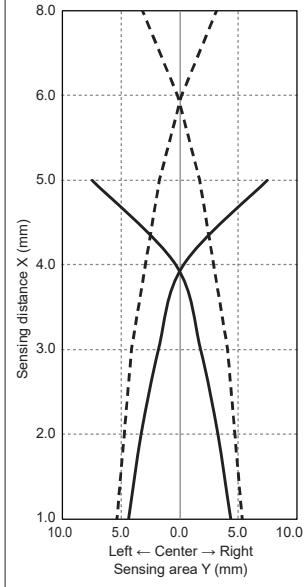


● PRW(L)30-10D□/15D□

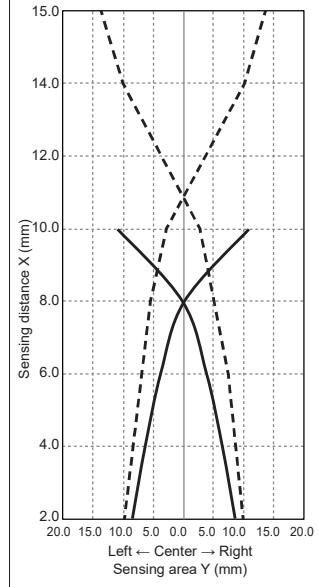

Cylindrical Cable Connector Type

■ Proper Usage


◎ Load connections

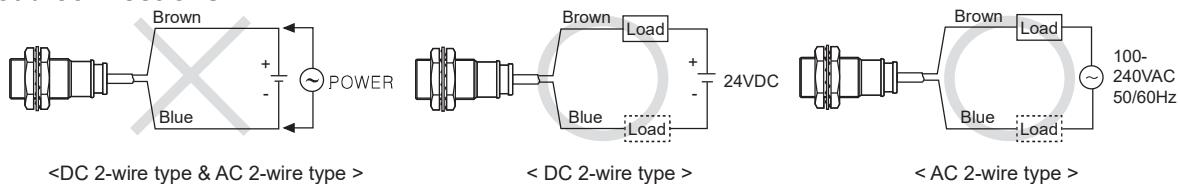

When using DC or AC 2-wire type proximity sensor, the load must be connected otherwise internal components may be damaged. The load can be connected to either wire.

◎ In case of the load current is small

• AC 2-wire type

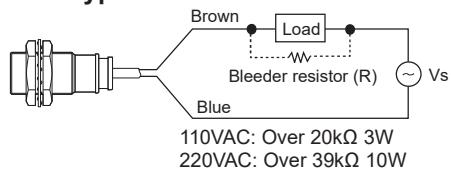

It may cause return failure of load by residual voltage. If the load current is under 5mA, please make sure the residual voltage is less than the return voltage of the load by connecting a bleeder resistor in parallel with the load as shown in the diagram.

$$R \leq \frac{Vs}{I} (\text{k}\Omega) \quad P > \frac{Vs^2}{R} (\text{W})$$

[I: Action current of load, R: Bleeder resistance, P: Permissible power]


Please make the current on proximity sensor smaller than the return current of load by connecting a bleeder resistor in parallel.

※ W value of Bleeder resistor should be bigger for proper heat dissipation.

$$R \leq \frac{Vs}{Io-Ioff} (\text{k}\Omega) \quad P > \frac{Vs^2}{R} (\text{W})$$



[Vs: Power supply, Io: Min. action current of proximity sensor
Ioff: Return current of load, P: Number of Bleeder resistance watt]

• DC 2-wire type



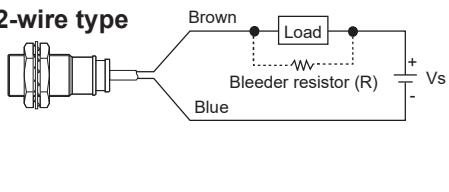


◎ Mutual-interference & Influence by surrounding metals

When several proximity sensors are mounted close to one another a malfunction of the may be caused due to mutual interference. Therefore, be sure to provide a minimum distance between the two sensors as below chart indicates.

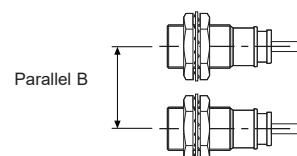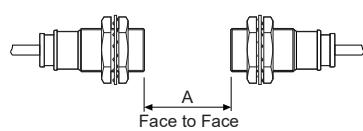

When sensors are mounted on metallic panel, it must be prevented sensors from being affected by any metallic object except target. Therefore, be sure to provide a minimum distance as below chart indicates.

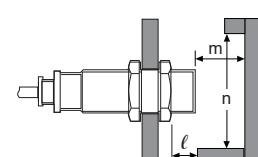

(unit: mm)

Model	PRW(L)08-1.5D PRWT08-1.5D	PRW(L)08-2D PRWT08-2D	PRWT12-2D PRW12-2A	PRWT12-4D PRW12-4A	PRWT18-5D PRW(L)18-5D PRW(L)18-5A	PRWT18-8D PRW(L)18-8D PRW(L)18-8A	PRWT30-10D PRW(L)30-10D PRW(L)30-10A	PRWT30-15D PRW(L)30-15D PRW(L)30-15A
Item	9	12	12	24	30	48	60	90
A	16	24	24	36	36	54	60	90
B	0	8	0	11	0	14	0	15
Ød	8	24	12	36	18	54	30	90
m	4.5	6	6	12	15	24	30	45
n	12	24	18	36	27	54	45	90

SENSORS
CONTROLLERS
MOTION DEVICES
SOFTWARE

(A) Photoelectric Sensors

(B) Fiber Optic Sensors

(C) LiDAR

(D) Door/Area Sensors

(E) Vision Sensors

(F) Proximity Sensors

(G) Pressure Sensors

(H) Rotary Encoders

(I) Connectors/
Connector Cables/
Sensor Distribution Boxes/
Sockets