


Insulated vinyl butt connectors

Material	Characteristics
- Insulation material: PVC - Terminal Body: Copper with tin plated	- WIRE-STOP structure is conducive to insertion wire in right place - Wires of different specifications are stacked and crimped together

材质：紫铜

长形全绝缘中间接头(TL-JTK型) INSULATED VINYL BUTT CONNECTORS

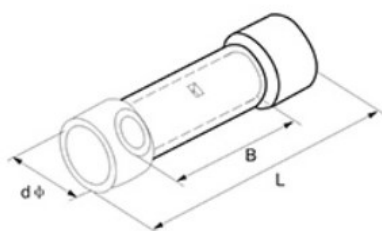

型号 ITEM NO	尺寸 DIMENSION					最大电流 I _{max}	绝缘颜色 INSULATION color
	A、W、G	mm ²	B mm	dφ mm	L mm		
BV0.75	22-18	0.5-1.0	15.0	1.7	25.5	19A	红 Red
BV 1.25	22-16	0.75-1.5	15.0	1.9	26.0	19A	红 Red
BV 2	16~14	1.5-2.5	15.0	2.3	26.0	27A	兰 Blue
BV 3.5	14-12	2.5-4	15.0	3.0	26.0	37A	黑 Black
BV 5.5	12-10	4-6	15.0	3.4	26.0	48A	黄 Yellow
BV 8	#8	6-10	21.0	4.5	35.0	62A	红 Red
BV 14	#6	10-16	26.0	5.8	42.0	88A	兰 Blue
BV 22	#4	16-25	29.0	7.7	50.0	115A	黄 Yellow

短形全绝缘中间接头(TL-JTK型) INSULATED PARALLEL CONNECTORS

型号 ITEM NO	尺寸 DIMENSION					最大电流 I _{max}	绝缘颜色 Insulation Color
	A、W、G	mm ²	B mm	dφ mm	L mm		
PVT 1.25	22-16	0.5-1.5	8.0	1.9	16.0	19A	红 Red
PVT 2	16-14	1.5-2.5	8.0	2.3	16.0	27A	兰 Blue
PVT 5.5	12-10	4-6	8.5	3.4	20.5	48A	黄 Yellow

