

Ø 30 mm Selector Switches



S3SF Series CATALOG

For your safety, read and follow the considerations written in the instruction manual, other manuals and Autonics website.

The specifications, dimensions, etc. are subject to change without notice for product improvement. Some models may be discontinued without notice.

Features

- Smooth operation
- High electrical conductivity
- Long-lasting durability

Specifications

Series	S3SF Series		
Actuation angle	2-position: [Spring return] 60° ±5°, 90° ±5° [Maintained] 90° ±5° 3-position: [Spring return] 60° ±5°, 45° ±5° [Maintained] 90° ±5°, 45° ±5°		
Actuation force	0.5 kgf (4.9 N) (per 1 contact)		
Installation	Flush		
Shock	300 m/s ² (≈ 30 G) in each X, Y, Z direction for 3 times		
Shock (malfunction)	100 m/s ² (≈ 10 G) in each X, Y, Z direction for 3 times		
Vibration	1.5 mm amplitude at frequency of 10 to 55 Hz (for 1 min) in each X, Y, Z direction for 2 hours		
Vibration (malfunction)	1.5 mm amplitude at frequency of 10 to 55 Hz (for 1 min) in each X, Y, Z direction for 10 minutes		
Mechanical life cycle (control unit life cycle)	≥ 100,000 operations (20 operations/min)		
Ambient temperature	-15 to 55 °C, storage: -25 to 65 °C (no freezing or condensation)		
Ambient humidity	35 to 85 %RH, storage: 35 to 85 %RH (no freezing or condensation)		
Protection structure	Control unit: IP52 (IEC standard)		
Approval	CE, UL, ENEC, ENEC, PS		
Control unit weight	Standard head type: ≈ 23.5 g Shark-head type: ≈ 21 g	2:40.5 2:38	1:41.5 1:39
Housing weight	≈ 7 g		


Contact blocks	
Power supply / current	110 VAC~ / 10 A, 250 VAC~ / 6 A
Dielectric strength	2,500 VAC~ 50/60 Hz for 1 minute
Insulation resistance	≥ 1,000 MΩ (500 VDC≡ megger)
Contact resistance	≤ 20 mΩ (initial)
Electrical life cycle	≥ 100,000 operations (20 operations/min)
Contact material	AgNi10
Approval	CE, UL, ENEC, ENEC, PS
Weight	Modular type: ≈ 10 g, Singular type: ≈ 11 g
LED blocks	
Rated voltage	AC/DC voltage type: 12-24 VAC~ 50/60 Hz, 12-24 VDC≡ AC voltage type: 110-220 VAC~ 50/60 Hz
Current consumption	≤ 20 mA
Approval	CE, UL, ENEC
Weight	AC/DC voltage type: ≈ 11 g, AC voltage type: ≈ 12 g

Sold Separately


- Contact blocks (SA□-C□□)
- LED blocks (SA□-L□□□)
- Locking handle (SA□-LH)
- Switch washer (SA-SW□)

Actuation angle


2-position spring return (standard lever)




2-position maintained (standard lever)




2-position spring return (shark-head lever)

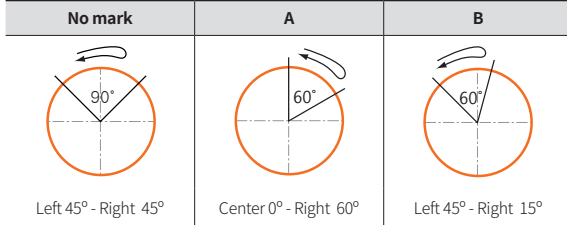


2-position maintained (shark-head lever)

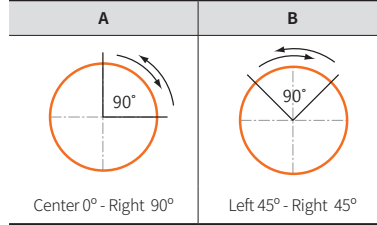


3-position two-way spring return

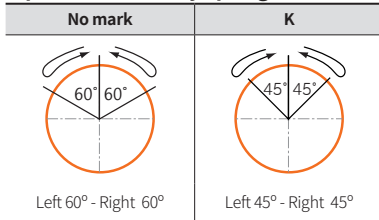


3-position maintained

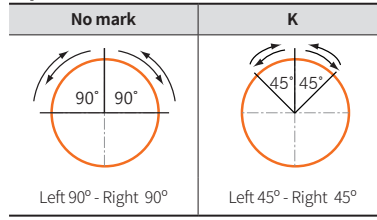

3-position right spring return

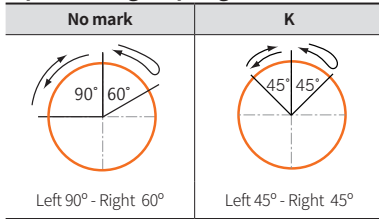

3-position left spring return

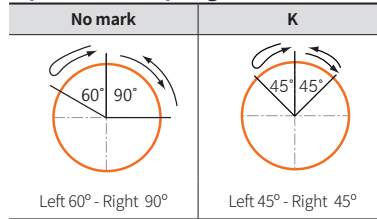

Ordering Information

This is only for reference. For selecting the specified model, follow the Autonics website.

Model is based on control unit+block combination. Control units or blocks are sold separately. In case of block, refer to control switch accessories.

■ Non-illuminated

S3SF	1	-	S	2	3	4	5	6
Control unit							Block	

1 Appearance

No mark: Standard lever

N: Shark-head lever

2 Operation

Short lever	Long lever	Operation
1	2	2-position spring return
3	4	2-position maintained
5	6	3-position two-way spring return
7	8	3-position maintained
A	B	3-position right spring return
C	D	3-position left spring return

3 Actuation angle

Refer to Actuation Angle.

5 Contact block

A: 1 A contact

2A: 2 A contacts

B: 1 B contact

2B: 2 B contacts

AB: 1 A contact, 1 B contact

4 Button color

R: Red

W: White

6 Block

No mark: Singular type

M: Modular type

Model	Contact block		LED block	
	A contact	B contact	AC/DC voltage	AC voltage
S3SF-S1□A(M)	1	-	-	-
S3SF-S1□2A(M)	2	-	-	-
S3SF-S1□B(M)	-	1	-	-
S3SF-S1□2B(M)	-	2	-	-
S3SF-S1□AB(M)	1	1	-	-
S3SF-S3□A(M)	1	-	-	-
S3SF-S3□2A(M)	2	-	-	-
S3SF-S3□B(M)	-	1	-	-
S3SF-S3□2B(M)	-	2	-	-
S3SF-S3□AB(M)	1	1	-	-
S3SF-S5K□2A(M)	2	-	-	-
S3SF-S5K□2B(M)	-	2	-	-
S3SF-S5K□AB(M)	1	1	-	-
S3SF-S7K□2A(M)	2	-	-	-
S3SF-S7K□2B(M)	-	2	-	-
S3SF-S7K□AB(M)	1	1	-	-
S3SF-SAK□2A(M)	2	-	-	-
S3SF-SAK□2B(M)	-	2	-	-
S3SF-SAK□AB(M)	1	1	-	-
S3SF-SCK□2A(M)	2	-	-	-
S3SF-SCK□2B(M)	-	2	-	-
S3SF-SCK□AB(M)	1	1	-	-
S3SF-S5□2A(M)	2	-	-	-
S3SF-S5□2B(M)	-	2	-	-
S3SF-S5□AB(M)	1	1	-	-
S3SF-S7□2A(M)	2	-	-	-
S3SF-S7□2B(M)	-	2	-	-
S3SF-S7□AB(M)	1	1	-	-
S3SF-SA□2A(M)	2	-	-	-
S3SF-SA□2B(M)	-	2	-	-
S3SF-SA□AB(M)	1	1	-	-
S3SF-SC□2A(M)	2	-	-	-
S3SF-SC□2B(M)	-	2	-	-
S3SF-SC□AB(M)	1	1	-	-
S3SF-S2□A(M)	1	-	-	-
S3SF-S2□2A(M)	2	-	-	-
S3SF-S2□B(M)	-	1	-	-
S3SF-S2□2B(M)	-	2	-	-
S3SF-S2□AB(M)	1	1	-	-
S3SF-S4□A(M)	1	-	-	-
S3SF-S4□2A(M)	2	-	-	-
S3SF-S4□B(M)	-	1	-	-
S3SF-S4□2B(M)	-	2	-	-
S3SF-S4□AB(M)	1	1	-	-
S3SF-S6K□2A(M)	2	-	-	-
S3SF-S6K□2B(M)	-	2	-	-
S3SF-S6K□AB(M)	1	1	-	-
S3SF-S8K□2A(M)	2	-	-	-
S3SF-S8K□2B(M)	-	2	-	-
S3SF-S8K□AB(M)	1	1	-	-
S3SF-SBK□2A(M)	2	-	-	-
S3SF-SBK□2B(M)	-	2	-	-
S3SF-SBK□AB(M)	1	1	-	-
S3SF-SDK□2A(M)	2	-	-	-
S3SF-SDK□2B(M)	-	2	-	-
S3SF-SDK□AB(M)	1	1	-	-
S3SF-S6□2A(M)	2	-	-	-
S3SF-S6□2B(M)	-	2	-	-
S3SF-S6□2AB(M)	1	1	-	-
S3SF-S8□2A(M)	2	-	-	-
S3SF-S8□2B(M)	-	2	-	-
S3SF-S8□AB(M)	1	1	-	-
S3SF-SB□2A(M)	2	-	-	-
S3SF-SB□2B(M)	-	2	-	-
S3SF-SB□AB(M)	1	1	-	-
S3SF-SD□2A(M)	2	-	-	-
S3SF-SD□2B(M)	-	2	-	-
S3SF-SD□AB(M)	1	1	-	-

Model	Contact block		LED block	
	A contact	B contact	AC/DC voltage	AC voltage
S3SFN-S1A□A(M)	1	-		
S3SFN-S1A□2A(M)	2	-		
S3SFN-S1A□B(M)	-	1	-	-
S3SFN-S1A□2B(M)	-	2		
S3SFN-S1A□AB(M)	1	1		
S3SFN-S3A□A(M)	1	-		
S3SFN-S3A□2A(M)	2	-		
S3SFN-S3A□B(M)	-	1	-	-
S3SFN-S3A□2B(M)	-	2		
S3SFN-S3A□AB(M)	1	1		
S3SFN-S1B□A(M)	1	-		
S3SFN-S1B□2A(M)	2	-		
S3SFN-S1B□B(M)	-	1	-	-
S3SFN-S1B□2B(M)	-	2		
S3SFN-S1B□AB(M)	1	1		
S3SFN-S3B□A(M)	1	-		
S3SFN-S3B□2A(M)	2	-		
S3SFN-S3B□B(M)	-	1	-	-
S3SFN-S3B□2B(M)	-	2		
S3SFN-S3B□AB(M)	1	1		
S3SFN-S1□A(M)	1	-		
S3SFN-S1□2A(M)	2	-		
S3SFN-S1□B(M)	-	1	-	-
S3SFN-S1□2B(M)	-	2		
S3SFN-S1□AB(M)	1	1		
S3SFN-S5K□2A(M)	2	-		
S3SFN-S5K□2B(M)	-	2	-	-
S3SFN-S5K□AB(M)	1	1		
S3SFN-S7K□2A(M)	2	-		
S3SFN-S7K□2B(M)	-	2	-	-
S3SFN-S7K□AB(M)	1	1		
S3SFN-SAK□2A(M)	2	-		
S2SFN-SAK□2B(M)	-	2	-	-
S2SFN-SAK□AB(M)	1	1		
S2SFN-SCK□2A(M)	2	-		
S2SFN-SCK□2B(M)	-	2	-	-
S2SFN-SCK□AB(M)	1	1		
S3SFN-S5□2A(M)	2	-		
S3SFN-S5□2B(M)	-	2	-	-
S3SFN-S5□AB(M)	1	1		
S3SFN-S7□2A(M)	2	-		
S3SFN-S7□2B(M)	-	2	-	-
S3SFN-S7□AB(M)	1	1		
S3SFN-SA□2A(M)	2	-		
S2SFN-SA□2B(M)	-	2	-	-
S2SFN-SA□AB(M)	1	1		
S2SFN-SC□2A(M)	2	-		
S2SFN-SC□2B(M)	-	2	-	-
S2SFN-SC□AB(M)	1	1		
S3SFN-S2A□A(M)	1	-		
S3SFN-S2A□2A(M)	2	-		
S3SFN-S2A□B(M)	-	1	-	-
S3SFN-S2A□2B(M)	-	2		
S3SFN-S2A□AB(M)	1	1		
S3SFN-S4A□A(M)	1	-		
S3SFN-S4A□2A(M)	2	-		
S3SFN-S4A□B(M)	-	1	-	-
S3SFN-S4A□2B(M)	-	2		
S3SFN-S4A□AB(M)	1	1		
S3SFN-S2B□A(M)	1	-		
S3SFN-S2B□2A(M)	2	-		
S3SFN-S2B□B(M)	-	1	-	-
S3SFN-S2B□2B(M)	-	2		
S3SFN-S2B□AB(M)	1	1		
S3SFN-S4B□A(M)	1	-		
S3SFN-S4B□2A(M)	2	-		
S3SFN-S4B□B(M)	-	1	-	-
S3SFN-S4B□2B(M)	-	2		
S3SFN-S4B□AB(M)	1	1		
S3SFN-S2□A(M)	1	-		
S3SFN-S2□2A(M)	2	-		
S3SFN-S2□B(M)	-	1	-	-
S3SFN-S2□2B(M)	-	2		
S3SFN-S2□AB(M)	1	1		

Model	Contact block		LED block	
	A contact	B contact	AC/DC voltage	AC voltage
S3SFN-S6K□2A(M)	2	-		
S3SFN-S6K□2B(M)	-	2	-	-
S3SFN-S6K□AB(M)	1	1		
S3SFN-S8K□2A(M)	2	-		
S3SFN-S8K□2B(M)	-	2	-	-
S3SFN-S8K□AB(M)	1	1		
S3SFN-SBK□2A(M)	2	-		
S3SFN-SBK□2B(M)	-	2	-	-
S3SFN-SBK□AB(M)	1	1		
S3SFN-SDK□2A(M)	2	-		
S3SFN-SDK□2B(M)	-	2	-	-
S3SFN-SDK□AB(M)	1	1		
S3SFN-S6□2A(M)	2	-		
S3SFN-S6□2B(M)	-	2	-	-
S3SFN-S6□AB(M)	1	1		
S3SFN-S8□2A(M)	2	-		
S3SFN-S8□2B(M)	-	2	-	-
S3SFN-S8□AB(M)	1	1		
S3SFN-SB□2A(M)	2	-		
S3SFN-SB□2B(M)	-	2	-	-
S3SFN-SB□AB(M)	1	1		
S3SFN-SD□2A(M)	2	-		
S3SFN-SD□2B(M)	-	2	-	-
S3SFN-SD□AB(M)	1	1		

■ Illuminated

S3SF	N	-	L	1	2	3	4	5	6
Control unit							Block		

1 Operation

Short lever	Long lever	Operation
1	2	2-position spring return
3	4	2-position maintained
5	6	3-position two-way spring return
7	8	3-position maintained
A	B	3-position right spring return
C	D	3-position left spring return

2 Actuation angle

Refer to Actuation Angle.

4 Contact block

A: 1 A contact
 2A: 2 A contacts
 B: 1 B contact
 2B: 2 B contacts
 AB: 1 A contact, 1 B contact

3 Button color

R: Red
 B: Blue
 G: Green
 Y: Yellow

5 LED block

D: 1 AC/DC voltage type
 L: 1 AC voltage type

6 Block

No mark: Singular type
 M: Modular type

Model	Contact block		LED block	
	A contact	B contact	AC/DC voltage	AC voltage
S3SFN-L1A□AL(M)	1	-		
S3SFN-L1A□2AL(M)	2	-		
S3SFN-L1A□BL(M)	-	1	-	1
S3SFN-L1A□2BL(M)	-	2		
S3SFN-L1A□ABL(M)	1	1		
S3SFN-L3A□AL(M)	1	-		
S3SFN-L3A□2AL(M)	2	-	-	1
S3SFN-L3A□BL(M)	-	1		
S3SFN-L3A□2BL(M)	-	2		
S3SFN-L3A□ABL(M)	1	1		
S3SFN-L1B□AL(M)	1	-		
S3SFN-L1B□2AL(M)	2	-	-	1
S3SFN-L1B□BL(M)	-	1		
S3SFN-L1B□2BL(M)	-	2		
S3SFN-L1B□ABL(M)	1	1		
S3SFN-L3B□AL(M)	1	-		
S3SFN-L3B□2AL(M)	2	-	-	1
S3SFN-L3B□BL(M)	-	1		
S3SFN-L3B□2BL(M)	-	2		
S3SFN-L3B□ABL(M)	1	1		
S3SFN-L1□AL(M)	1	-		
S3SFN-L1□2AL(M)	2	-	-	1
S3SFN-L1□BL(M)	-	1		
S3SFN-L1□2BL(M)	-	2		
S3SFN-L1□ABL(M)	1	1		
S3SFN-L5K□2AL(M)	2	-	-	1
S3SFN-L5K□2BL(M)	-	2		
S3SFN-L5K□ABL(M)	1	1		
S3SFN-L7K□2AL(M)	2	-	-	1
S3SFN-L7K□2BL(M)	-	2		
S3SFN-L7K□ABL(M)	1	1		
S3SFN-LAK□2AL(M)	2	-	-	1
S3SFN-LAK□2BL(M)	-	2		
S3SFN-LAK□ABL(M)	1	1		
S3SFN-LCK□2AL(M)	2	-	-	1
S3SFN-LCK□2BL(M)	-	2		
S3SFN-LCK□ABL(M)	1	1		
S3SFN-L5□2AL(M)	2	-	-	1
S3SFN-L5□2BL(M)	-	2		
S3SFN-L5□ABL(M)	1	1		
S3SFN-L7□2AL(M)	2	-	-	1
S3SFN-L7□2BL(M)	-	2		
S3SFN-L7□ABL(M)	1	1		
S3SFN-LA□2AL(M)	2	-	-	1
S3SFN-LA□2BL(M)	-	2		
S3SFN-LA□ABL(M)	1	1		
S3SFN-LC□2AL(M)	2	-	-	1
S3SFN-LC□2BL(M)	-	2		
S3SFN-LC□ABL(M)	1	1		
S3SFN-L1A□AD(M)	1	-	1	-
S3SFN-L1A□2AD(M)	2	-		
S3SFN-L1A□BD(M)	-	1		
S3SFN-L1A□2BD(M)	-	2		
S3SFN-L1A□ABD(M)	1	1		
S3SFN-L3A□AD(M)	1	-	1	-
S3SFN-L3A□2AD(M)	2	-		
S3SFN-L3A□BD(M)	-	1		
S3SFN-L3A□2BD(M)	-	2		
S3SFN-L3A□ABD(M)	1	1		
S3SFN-L1B□AD(M)	1	-	1	-
S3SFN-L1B□2AD(M)	2	-		
S3SFN-L1B□BD(M)	-	1		
S3SFN-L1B□2BD(M)	-	2		
S3SFN-L1B□ABD(M)	1	1		
S3SFN-L3B□AD(M)	1	-	1	-
S3SFN-L3B□2AD(M)	2	-		
S3SFN-L3B□BD(M)	-	1		
S3SFN-L3B□2BD(M)	-	2		
S3SFN-L3B□ABD(M)	1	1		


Model	Contact block		LED block	
	A contact	B contact	AC/DC voltage	AC voltage
S3SFN-L1□AD(M)	1	-	1	-
S3SFN-L1□2AD(M)	2	-		
S3SFN-L1□BD(M)	-	1		
S3SFN-L1□2BD(M)	-	2	1	-
S3SFN-L1□ABD(M)	1	1		
S3SFN-L5K□2AD(M)	2	-		
S3SFN-L5K□2BD(M)	-	2	1	-
S3SFN-L5K□ABD(M)	1	1		
S3SFN-L7K□2AD(M)	2	-		
S3SFN-L7K□2BD(M)	-	2	1	-
S3SFN-L7K□ABD(M)	1	1		
S3SFN-LAK□2AD(M)	2	-		
S3SFN-LAK□2BD(M)	-	2		
S3SFN-LAK□ABD(M)	1	1		
S3SFN-LCK□2AD(M)	2	-	1	-
S3SFN-LCK□2BD(M)	-	2		
S3SFN-LCK□ABD(M)	1	1		
S3SFN-L5□2AD(M)	2	-	1	-
S3SFN-L5□2BD(M)	-	2		
S3SFN-L5□ABD(M)	1	1		
S3SFN-L7□2AD(M)	2	-	1	-
S3SFN-L7□2BD(M)	-	2		
S3SFN-L7□ABD(M)	1	1		
S3SFN-LA□2AD(M)	2	-	1	-
S3SFN-LA□2BD(M)	-	2		
S3SFN-LA□ABD(M)	1	1		
S3SFN-LC□2AD(M)	2	-	1	-
S3SFN-LC□2BD(M)	-	2		
S3SFN-LC□ABD(M)	1	1		
S3SFN-L2A□AL(M)	1	-	-	1
S3SFN-L2A□2AL(M)	2	-		
S3SFN-L2A□BL(M)	-	1		
S3SFN-L2A□2BL(M)	-	2	-	1
S3SFN-L2A□ABL(M)	1	1		
S3SFN-L4A□AL(M)	1	-		
S3SFN-L4A□2AL(M)	2	-		
S3SFN-L4A□BL(M)	-	1		
S3SFN-L4A□2BL(M)	-	2	-	1
S3SFN-L4A□ABL(M)	1	1		
S3SFN-L2B□AL(M)	1	-		
S3SFN-L2B□2AL(M)	2	-		
S3SFN-L2B□BL(M)	-	1		
S3SFN-L2B□2BL(M)	-	2	-	1
S3SFN-L2B□ABL(M)	1	1		
S3SFN-L4B□AL(M)	1	-		
S3SFN-L4B□2AL(M)	2	-		
S3SFN-L4B□BL(M)	-	1		
S3SFN-L4B□2BL(M)	-	2	-	1
S3SFN-L4B□ABL(M)	1	1		
S3SFN-L2□AL(M)	1	-		
S3SFN-L2□2AL(M)	2	-		
S3SFN-L2□BL(M)	-	1		
S3SFN-L2□2BL(M)	-	2	-	1
S3SFN-L2□ABL(M)	1	1		
S3SFN-L6K□2AL(M)	2	-		
S3SFN-L6K□2BL(M)	-	2		
S3SFN-L6K□ABL(M)	1	1		
S3SFN-L8K□2AL(M)	2	-	-	1
S3SFN-L8K□2BL(M)	-	2		
S3SFN-L8K□ABL(M)	1	1		
S3SFN-LBK□2AL(M)	2	-	-	1
S3SFN-LBK□2BL(M)	-	2		
S3SFN-LBK□ABL(M)	1	1		
S3SFN-LDK□2AL(M)	2	-	-	1
S3SFN-LDK□2BL(M)	-	2		
S3SFN-LDK□ABL(M)	1	1		
S3SFN-L6□2AL(M)	2	-	-	1
S3SFN-L6□2BL(M)	-	2		
S3SFN-L6□ABL(M)	1	1		
S3SFN-L8□2AL(M)	2	-	-	1
S3SFN-L8□2BL(M)	-	2		
S3SFN-L8□ABL(M)	1	1		

Model	Contact block		LED block	
	A contact	B contact	AC/DC voltage	AC voltage
S3SFN-LB□2AL(M)	2	-	-	1
S3SFN-LB□2BL(M)	-	2		
S3SFN-LB□ABL(M)	1	1		
S3SFN-LD□2AL(M)	2	-	-	1
S3SFN-LD□2BL(M)	-	2		
S3SFN-LD□ABL(M)	1	1		
S3SFN-L2A□AD(M)	1	-	1	-
S3SFN-L2A□2AD(M)	2	-		
S3SFN-L2A□BD(M)	-	1		
S3SFN-L2A□2BD(M)	-	2	1	-
S3SFN-L2A□ABD(M)	1	1		
S3SFN-L4A□AD(M)	1	-		
S3SFN-L4A□2AD(M)	2	-		
S3SFN-L4A□BD(M)	-	1		
S3SFN-L4A□2BD(M)	-	2	1	-
S3SFN-L4A□ABD(M)	1	1		
S3SFN-L2B□AD(M)	1	-		
S3SFN-L2B□2AD(M)	2	-		
S3SFN-L2B□BD(M)	-	1		
S3SFN-L2B□2BD(M)	-	2	1	-
S3SFN-L2B□ABD(M)	1	1		
S3SFN-L4B□AD(M)	1	-		
S3SFN-L4B□2AD(M)	2	-		
S3SFN-L4B□BD(M)	-	1		
S3SFN-L4B□2BD(M)	-	2	1	-
S3SFN-L4B□ABD(M)	1	1		
S3SFN-L2□AD(M)	1	-		
S3SFN-L2□2AD(M)	2	-		
S3SFN-L2□BD(M)	-	1		
S3SFN-L2□2BD(M)	-	2	1	-
S3SFN-L2□ABD(M)	1	1		
S3SFN-L6K□2AD(M)	2	-		
S3SFN-L6K□2BD(M)	-	2		
S3SFN-L6K□ABD(M)	1	1		
S3SFN-L8K□2AD(M)	2	-	1	-
S3SFN-L8K□2BD(M)	-	2		
S3SFN-L8K□ABD(M)	1	1		
S3SFN-LBK□2AD(M)	2	-	1	-
S3SFN-LBK□2BD(M)	-	2		
S3SFN-LBK□ABD(M)	1	1		
S3SFN-LDK□2AD(M)	2	-	1	-
S3SFN-LDK□2BD(M)	-	2		
S3SFN-LDK□ABD(M)	1	1		
S3SFN-L6□2AD(M)	2	-	1	-
S3SFN-L6□2BD(M)	-	2		
S3SFN-L6□ABD(M)	1	1		
S3SFN-L8□2AD(M)	2	-	1	-
S3SFN-L8□2BD(M)	-	2		
S3SFN-L8□ABD(M)	1	1		
S3SFN-LB□2AD(M)	2	-	1	-
S3SFN-LB□2BD(M)	-	2		
S3SFN-LB□ABD(M)	1	1		
S3SFN-LD□2AD(M)	2	-	1	-
S3SFN-LD□2BD(M)	-	2		
S3SFN-LD□ABD(M)	1	1		


Dimensions

- Unit: mm, For the detailed drawings, follow the Autonics website.
- Panel thickness: ≤ 6 mm


■ S3SF-S1/3/5/7/A/C □ (standard / short lever, singular type block)

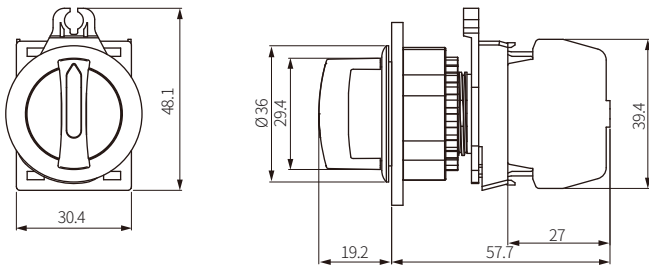


■ S3SF-S1/3/5/7/A/C □ M (standard / short lever, modular type block)

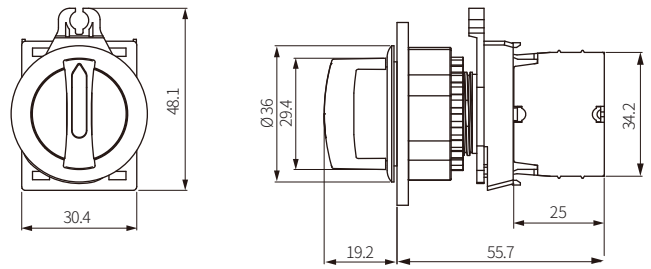


■ S3SF-S2/4/6/8/B/D □ (standard / long lever, singular type block)

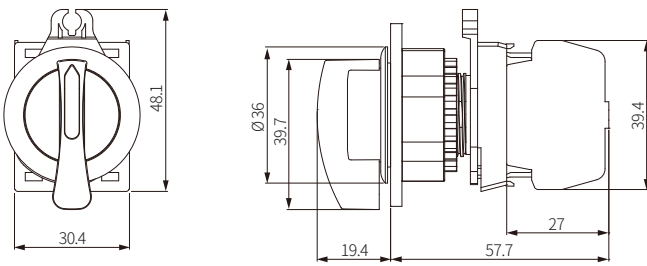


■ S3SF-S2/4/6/8/B/D □ M (standard / long lever, modular type block)

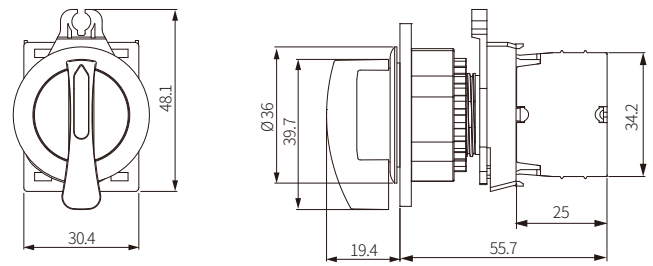


■ S3SFN-□1/3/5/7/A/C □ (shark-head / short lever, singular type block)

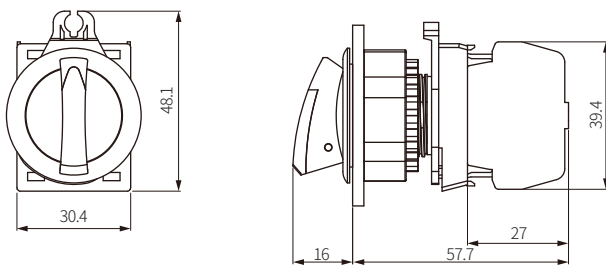


■ S3SFN-□1/3/5/7/A/C □ M (shark-head / short lever, modular type block)

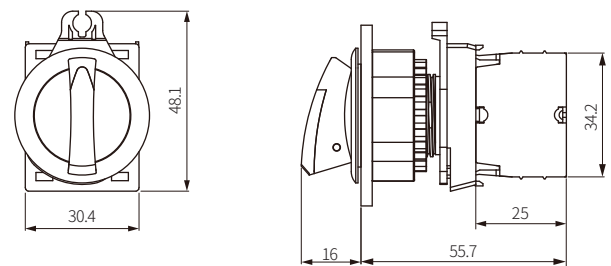


■ S3SFN-□2/4/6/8/B/D □ (shark-head / long lever, singular type block)

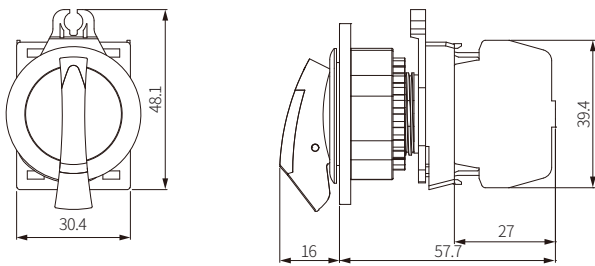

■ S3SFN-□2/4/6/8/B/D □ M (shark-head / long lever, modular type block)

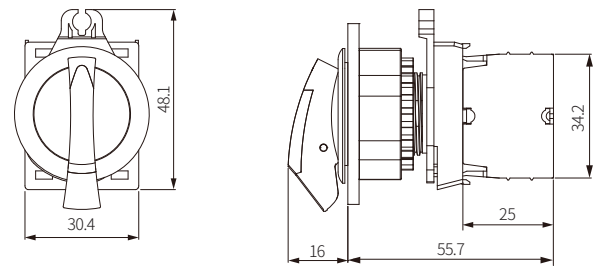

■ Panel cut-out



	A	B
Short lever	≥ 37	≥ 55
Long lever	≥ 55	≥ 55