



HR series HR 1218W



Valve Regulated Lead Acid Battery

Maintenance-Free Sealed Lead Acid Battery.
Absorbent Glass Mat (AGM) technology for efficient gas recombination of up to 99%.

General Design for Standby Power Applications

【Design Life】

Up to 5 Years in Standby Service at 25°C
Eurobat (20°C) : 3-5 YEARS STANDARD COMMERCIAL

【Operating Temperature Range】

Nominal Operating Temperature : 25°C (77°F)
Discharge : -15°C ~ 50°C (5°F~122°F)
Charge: -15°C ~ 40°C (5°F~104°F)
Storage: -15°C ~ 40°C (5°F~104°F)

【Float Charging Voltage】

13.5 ~ 13.8 VDC/Unit at 25°C (77°F)

【Equalization Charging Voltage】


14.4 ~ 15.0 VDC/Unit at 25°C (77°F)

【Self Discharge】

Less than 10% after 90 days, can be stored up to 6 months at 25°C (77°F);
Fully recharging is required before usage, and charged sooner if stored at higher temperature than 25°C (77°F).

Specification Design according with IEC 61056-1/2:2012

Nominal Voltage	12V (6 cells per unit)		
Nominal Capacity	18W @15min-rate to 1.67V per cell @25°C (77°F)		
Weight	Approx. 1.53 Kg (3.37 lbs)		
Maximum Discharge Current	130A (5sec)		
Internal Resistance	Approx. 28.5 mΩ		
Short Circuit Current	--		
Maximum Charge Current	1.8A		
Terminal types	F2-Faston Tab250		
Terminal tightening torque	--		
Container Material	ABS (UL 94-HB) & Flame Retardant (94-V0) available upon request		
Dimensions	Length (L)	150.9±2.0 mm	5.94±0.08 inch
	Width (W)	51.0±1.0 mm	2.01±0.04 inch
	Container Height (h)	94.3±1.0 mm	3.71±0.04 inch
	Overall Height (H)	98.6±1.0 mm	3.88±0.04 inch

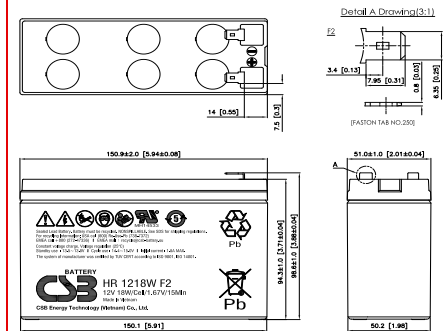

Constant Current Discharge Characteristics Unit: A (25°C, 77°F)

F.V/Time	2MIN	4MIN	5MIN	6MIN	8MIN	10MIN	15MIN	20MIN	30MIN	45MIN	60MIN	90MIN
1.60V	33.2	26.5	22.8	20.2	16.3	13.6	9.86	7.77	5.61	4.02	3.17	2.28
1.67V	30.9	24.8	21.8	19.6	15.9	13.3	9.74	7.74	5.54	3.96	3.12	2.24
1.70V	30.0	24.1	21.3	19.2	15.5	13.0	9.59	7.67	5.47	3.92	3.10	2.22
1.75V	29.2	22.8	20.1	18.1	15.0	12.7	9.46	7.53	5.42	3.89	3.07	2.20
1.80V	27.9	20.6	18.3	16.6	14.1	12.0	9.11	7.32	5.32	3.83	3.04	2.17
1.85V	24.1	18.3	16.3	14.9	12.6	10.9	8.43	6.82	5.04	3.66	2.92	2.09

Constant Power Discharge Characteristics Unit: W (25°C, 77°F)

F.V/Time	2MIN	4MIN	5MIN	6MIN	8MIN	10MIN	15MIN	20MIN	30MIN	45MIN	60MIN	90MIN
1.60V	339	271	237	213	178	150	108	88.0	64.5	46.6	37.0	26.7
1.67V	332	260	229	206	174	147	107	87.0	64.2	46.4	36.8	26.5
1.70V	329	252	223	202	172	146	106	85.8	63.5	45.9	36.4	26.2
1.75V	325	241	214	194	165	141	105	85.0	62.9	45.4	36.0	26.0
1.80V	308	227	202	183	155	133	102	82.5	61.8	44.8	35.6	25.7
1.85V	273	207	186	170	143	124	94.6	77.9	59.2	43.1	34.4	24.8

Please refer to the official site for the latest rating confirmation. URL: www.csb-battery.com

Issued: 200927

Sales Offices

希世比能源科技股份有限公司
CSB Energy Technology Co., Ltd.

BUSINESS HEADQUARTERS

Tel: +886-2-2880-5600
Fax: +886-2-2888-3300

USA OFFICE

Tel: +1-817-244-7777 / 1-(800)3-CSB-USA (272872)
Fax: +1-817-244-4445

SHENZHEN OFFICE (CHINA)

Tel: +86-755-8831-6488/6775/6075
Fax: +86-755-8831-6548

EUROPE (EMEA) OFFICE

Tel: +31(0)180-418-140
Fax: +31(0)180-418-327

SHANGHAI OFFICE (CHINA)

Tel: +86-21-5046-1622/0833/0094
Fax: +86-21-5046-1046

Recognized under UL 1989,
and certified by ISO 9001, 14001, 45001, 50001.



TAIPEI OFFICE

Tel: +886-2-2880-5600
Fax: +866-2-2888-3300

BEIJING OFFICE (CHINA)

Tel: +86-10-6597-8065/8165/8265
Fax: +86-10-6597-8565



HR series HR 1221W



Valve Regulated Lead Acid Battery

Maintenance-Free Sealed Lead Acid Battery.
Absorbent Glass Mat (AGM) technology for efficient gas recombination of up to 99%.

General Design for Standby Power Applications

【Design Life】

Up to 5 Years in Standby Service at 25°C
Eurobat (20°C) : 3-5 YEARS STANDARD COMMERCIAL

【Operating Temperature Range】

Nominal Operating Temperature : 25°C (77°F)
Discharge : -15°C ~ 50°C (5°F~122°F)
Charge: -15°C ~ 40°C (5°F~104°F)
Storage: -15°C ~ 40°C (5°F~104°F)

【Float Charging Voltage】

13.5 ~ 13.8 VDC/Unit at 25°C (77°F)

【Equalization Charging Voltage】


14.4 ~ 15.0 VDC/Unit at 25°C (77°F)

【Self Discharge】

Less than 10% after 90 days, can be stored up to 6 months at 25°C (77°F);
Fully recharging is required before usage, and charged sooner if stored at higher temperature than 25°C (77°F).

Specification Design according with IEC 61056-1/2:2012

Nominal Voltage	12V (6 cells per unit)	
Nominal Capacity	21W @15min-rate to 1.67V per cell @25°C (77°F)	
Weight	Approx. 1.80 Kg (3.97 lbs)	
Maximum Discharge Current	60/90A (5sec)	
Internal Resistance	Approx. 23.0 mΩ	
Short Circuit Current	249A	
Maximum Charge Current	2.1A	
Terminal types	F1/F2 -Faston Tab187/250	
Terminal tightening torque	--	
Container Material	ABS (UL 94-HB) & Flame Retardant (94-V0) available upon request	
Dimensions	Length (L)	90.0±1.0 mm 3.54±0.04 inch
	Width (W)	70.0±1.0 mm 2.76±0.04 inch
	Container Height (h)	101.8±1.5 mm 4.01±0.06 inch
	Overall Height (H)	106.1±1.5 mm 4.18±0.06 inch

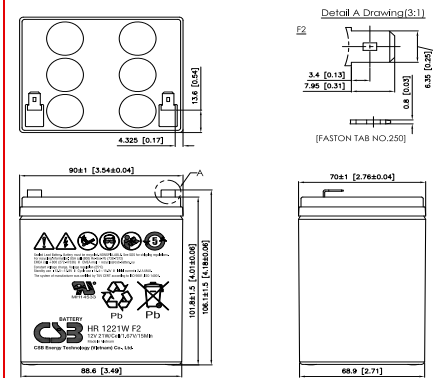

Constant Current Discharge Characteristics Unit: A (25°C, 77°F)

F.V/Time	2MIN	4MIN	5MIN	6MIN	8MIN	10MIN	15MIN	20MIN	30MIN	45MIN	60MIN	90MIN
1.60V	46.4	31.2	27.3	24.4	20.3	17.4	12.9	10.4	7.29	5.15	4.02	2.83
1.67V	43.1	29.7	26.2	23.6	19.9	17.1	12.5	10.1	7.18	5.10	4.00	2.71
1.70V	41.3	28.9	25.6	23.2	19.7	16.8	12.3	9.93	7.14	5.08	3.99	2.65
1.75V	37.4	27.4	24.4	22.2	19.0	16.3	12.1	9.70	7.07	5.05	3.98	2.56
1.80V	33.1	25.2	22.8	21.0	18.2	15.7	11.8	9.51	7.00	5.02	3.96	2.46
1.85V	28.6	22.8	20.7	19.2	16.9	14.8	11.5	9.29	6.92	4.98	3.95	2.36

Constant Power Discharge Characteristics Unit: W (25°C, 77°F)

F.V/Time	2MIN	4MIN	5MIN	6MIN	8MIN	10MIN	15MIN	20MIN	30MIN	45MIN	60MIN	90MIN
1.60V	557	374	327	293	244	209	154	123	87.5	61.7	48.2	33.9
1.67V	515	357	315	284	238	203	150	120	86.6	61.4	48.1	32.5
1.70V	495	348	308	279	234	200	149	119	86.2	61.2	48.0	31.9
1.75V	451	329	293	266	226	194	145	116	85.8	61.0	47.9	30.7
1.80V	397	302	272	250	216	188	141	113	85.4	60.8	47.8	29.5
1.85V	343	275	253	237	208	181	138	111	85.3	60.7	47.7	28.3

Please refer to the official site for the latest rating confirmation. URL: www.csb-battery.com

Issued: 200927

Sales Offices

希世比能源科技股份有限公司
CSB Energy Technology Co., Ltd.

BUSINESS HEADQUARTERS

Tel: +886-2-2880-5600
Fax: +886-2-2888-3300

USA OFFICE

Tel: +1-817-244-7777 / 1-(800)3-CSB-USA (272872)
Fax: +1-817-244-4445

SHENZHEN OFFICE (CHINA)

Tel: +86-755-8831-6488/6775/6075
Fax: +86-755-8831-6548

EUROPE (EMEA) OFFICE

Tel: +31(0)180-418-140
Fax: +31(0)180-418-327

SHANGHAI OFFICE (CHINA)

Tel: +86-21-5046-1622/0833/0094
Fax: +86-21-5046-1046

Recognized under UL 1989,
and certified by ISO 9001, 14001, 45001, 50001.



TAIPEI OFFICE

Tel: +886-2-2880-5600
Fax: +886-2-2888-3300

BEIJING OFFICE (CHINA)

Tel: +86-10-6597-8065/8165/8265
Fax: +86-10-6597-8565



HR series HR 1224W



Valve Regulated Lead Acid Battery

Maintenance-Free Sealed Lead Acid Battery.
Absorbent Glass Mat (AGM) technology for efficient gas recombination of up to 99%.

General Design for Standby Power Applications

【Design Life】

Up to 5 Years in Standby Service at 25°C
Eurobat (20°C) : 3-5 YEARS STANDARD COMMERCIAL

【Operating Temperature Range】

Nominal Operating Temperature : 25°C (77°F)
Discharge : -15°C ~ 50°C (5°F~122°F)
Charge: -15°C ~ 40°C (5°F~104°F)
Storage: -15°C ~ 40°C (5°F~104°F)

【Float Charging Voltage】

13.5 ~ 13.8 VDC/Unit at 25°C (77°F)

【Equalization Charging Voltage】


14.4 ~ 15.0 VDC/Unit at 25°C (77°F)

【Self Discharge】

Less than 10% after 90 days, can be stored up to 6 months at 25°C (77°F);
Fully recharging is required before usage, and charged sooner if stored at higher temperature than 25°C (77°F).

Specification Design according with IEC 61056-1/2:2012

Nominal Voltage	12V (6 cells per unit)		
Nominal Capacity	24W @15min-rate to 1.67V per cell @25°C (77°F)		
Weight	Approx. 1.95 Kg (4.30 lbs)		
Maximum Discharge Current	100/130A (5sec)		
Internal Resistance	Approx. 20.6 mΩ		
Short Circuit Current	260A		
Maximum Charge Current	2.4A		
Terminal types	F1/F2-Faston Tab187/250		
Terminal tightening torque	--		
Container Material	ABS (UL 94-HB) & Flame Retardant (94-V0) available upon request		
Dimensions	Length (L)	150.9±2.0 mm	5.94±0.08 inch
	Width (W)	51.0±1.0 mm	2.01±0.04 inch
	Container Height (h)	94.3±1.0 mm	3.71±0.04 inch
	Overall Height (H)	98.6±1.0 mm	3.89±0.04 inch

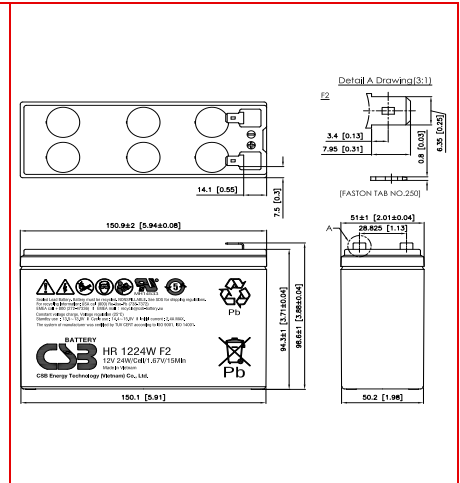

Constant Current Discharge Characteristics Unit: A (25°C, 77°F)

F.V/Time	2MIN	4MIN	5MIN	6MIN	8MIN	10MIN	15MIN	20MIN	30MIN	45MIN	60MIN	90MIN
1.60V	47.5	33.0	29.0	26.1	22.0	18.9	14.0	11.0	7.95	5.54	4.29	3.43
1.67V	44.1	31.1	27.4	24.7	21.0	18.0	13.5	10.6	7.76	5.42	4.20	3.34
1.70V	42.7	30.3	26.7	24.0	20.5	17.6	13.2	10.5	7.67	5.35	4.15	3.30
1.75V	40.5	28.8	25.4	23.0	19.8	17.0	12.8	10.2	7.56	5.29	4.10	3.26
1.80V	38.4	27.4	24.4	22.2	19.1	16.4	12.5	10.0	7.49	5.23	4.06	3.22
1.85V	36.4	26.0	23.3	21.3	18.5	16.0	12.1	9.84	7.44	5.21	4.04	3.19

Constant Power Discharge Characteristics Unit: W (25°C, 77°F)

F.V/Time	2MIN	4MIN	5MIN	6MIN	8MIN	10MIN	15MIN	20MIN	30MIN	45MIN	60MIN	90MIN
1.60V	570	396	348	313	264	228	168	132	95.4	66.5	51.5	41.2
1.67V	529	373	329	297	251	217	162	128	92.9	64.9	50.3	40.2
1.70V	512	363	320	289	246	212	159	126	92.1	64.4	49.9	39.7
1.75V	486	346	306	277	238	204	154	123	90.8	63.5	49.3	39.2
1.80V	461	329	293	266	229	197	149	121	89.9	62.9	48.8	38.8
1.85V	437	314	281	256	219	187	144	119	89.2	62.5	48.5	38.6

Please refer to the official site for the latest rating confirmation. URL: www.csb-battery.com

Issued: 200927

Sales Offices

希世比能源科技股份有限公司
CSB Energy Technology Co., Ltd.

BUSINESS HEADQUARTERS

Tel: +886-2-2880-5600
Fax: +886-2-2888-3300

USA OFFICE

Tel: +1-817-244-7777 / 1-(800)3-CSB-USA (272872)
Fax: +1-817-244-4445

SHENZHEN OFFICE (CHINA)

Tel: +86-755-8831-6488/6775/6075
Fax: +86-755-8831-6548

EUROPE (EMEA) OFFICE

Tel: +31(0)180-418-140
Fax: +31(0)180-418-327

SHANGHAI OFFICE (CHINA)

Tel: +86-21-5046-1622/0833/0094
Fax: +86-21-5046-1046

Recognized under UL 1989,
and certified by ISO 9001, 14001, 45001, 50001.



TAIPEI OFFICE

Tel: +886-2-2880-5600
Fax: +886-2-2888-3300

BEIJING OFFICE (CHINA)

Tel: +86-10-6597-8065/8165/8265
Fax: +86-10-6597-8565



HR series HR 1227W



Valve Regulated Lead Acid Battery

Maintenance-Free Sealed Lead Acid Battery.
Absorbent Glass Mat (AGM) technology for efficient gas recombination of up to 99%.

General Design for Standby Power Applications

【Design Life】

Up to 5 Years in Standby Service at 25°C
Eurobat (20°C) : 3-5 YEARS STANDARD COMMERCIAL

【Operating Temperature Range】

Nominal Operating Temperature : 25°C (77°F)
Discharge : -15°C ~ 50°C (5°F~122°F)
Charge: -15°C ~ 40°C (5°F~104°F)
Storage: -15°C ~ 40°C (5°F~104°F)

【Float Charging Voltage】

13.5 ~ 13.8 VDC/Unit at 25°C (77°F)

【Equalization Charging Voltage】


14.4 ~ 15.0 VDC/Unit at 25°C (77°F)

【Self Discharge】

Less than 10% after 90 days, can be stored up to 6 months at 25°C (77°F);
Fully recharging is required before usage, and charged sooner if stored at higher temperature than 25°C (77°F).

Specification Design according with IEC 61056-1/2:2012

Nominal Voltage	12V (6 cells per unit)	
Nominal Capacity	27W @15min-rate to 1.67V per cell @25°C (77°F)	
Weight	Approx. 1.97 Kg (4.34 lbs)	
Maximum Discharge Current	100/130A (5sec)	
Internal Resistance	Approx. 19.9 mΩ	
Short Circuit Current	424A	
Maximum Charge Current	2.7A	
Terminal types	F1/F2 -Faston Tab187/250	
Terminal tightening torque	--	
Container Material	ABS (UL 94-HB) & Flame Retardant (94-V0) available upon request	
Dimensions	Length (L)	90.0±1.0 mm 3.54±0.04 inch
	Width (W)	70.0±1.0 mm 2.76±0.04 inch
	Container Height (h)	101.8±1.5 mm 4.01±0.06 inch
	Overall Height (H)	106.1±1.5 mm 4.18±0.06 inch

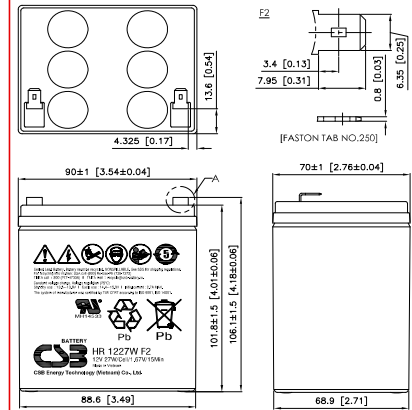

Constant Current Discharge Characteristics Unit: A (25°C, 77°F)

F.V/Time	2MIN	4MIN	5MIN	6MIN	8MIN	10MIN	15MIN	20MIN	30MIN	45MIN	60MIN	90MIN
1.60V	55.4	36.5	31.2	27.5	22.1	18.7	13.6	10.9	7.88	5.71	4.55	3.23
1.67V	50.4	34.3	29.8	26.5	21.4	18.3	13.5	10.8	7.83	5.66	4.49	3.18
1.70V	45.6	32.2	28.2	25.3	20.8	17.8	13.1	10.7	7.77	5.62	4.47	3.16
1.75V	41.0	29.9	26.6	24.2	20.0	17.2	12.8	10.6	7.68	5.57	4.43	3.13
1.80V	36.4	27.5	24.7	22.7	18.9	16.3	12.4	10.3	7.49	5.45	4.35	3.08
1.85V	31.7	24.8	22.5	20.7	17.4	15.2	11.7	9.59	7.11	5.20	4.16	2.96

Constant Power Discharge Characteristics Unit: W (25°C, 77°F)

F.V/Time	2MIN	4MIN	5MIN	6MIN	8MIN	10MIN	15MIN	20MIN	30MIN	45MIN	60MIN	90MIN
1.60V	574	383	338	305	254	219	163	127	92.4	66.3	52.4	37.4
1.67V	541	358	318	288	242	211	162	126	91.6	66.0	52.3	37.3
1.70V	522	347	308	280	236	206	161	125	91.3	65.8	52.2	37.1
1.75V	454	327	293	268	229	200	158	124	90.3	65.2	51.8	36.8
1.80V	403	309	278	255	218	192	153	120	88.2	64.2	51.3	36.7
1.85V	377	290	261	240	208	184	144	114	84.4	61.6	49.2	35.1

Please refer to the official site for the latest rating confirmation. URL: www.csb-battery.com

Issued: 211105

Sales Offices

希世比能源科技股份有限公司
CSB Energy Technology Co., Ltd.

BUSINESS HEADQUARTERS

Tel: +886-2-2880-5600
Fax: +886-2-2888-3300

USA OFFICE

Tel: +1-817-244-7777 / 1-(800)3-CSB-USA (272872)
Fax: +1-817-244-4445

SHENZHEN OFFICE (CHINA)

Tel: +86-755-8831-6488/6775/6075
Fax: +86-755-8831-6548

EUROPE (EMEA) OFFICE

Tel: +31(0)180-418-140
Fax: +31(0)180-418-327

SHANGHAI OFFICE (CHINA)

Tel: +86-21-5046-1622/0833/0094
Fax: +86-21-5046-1046

Recognized under UL 1989,
and certified by ISO 9001, 14001, 45001, 50001.



TAIPEI OFFICE

Tel: +886-2-2880-5600
Fax: +886-2-2888-3300

BEIJING OFFICE (CHINA)

Tel: +86-10-6597-8065/8165/8265
Fax: +86-10-6597-8565



HR series HR 1232W



Valve Regulated Lead Acid Battery

Maintenance-Free Sealed Lead Acid Battery.
Absorbent Glass Mat (AGM) technology for efficient gas recombination of up to 99%.

General Design for Standby Power Applications

【Design Life】

Up to 5 Years in Standby Service at 25°C
Eurobat (20°C) : 3-5 years, Standard Commercial

【Operating Temperature Range】

Nominal Operating Temperature : 25°C (77°F)
Discharge : -15°C ~ 50°C (5°F~122°F)
Charge: -15°C ~ 40°C (5°F~104°F)
Storage: -15°C ~ 40°C (5°F~104°F)

【Float Charging Voltage】

13.5 ~ 13.8 VDC/Unit at 25°C (77°F)

【Equalization Charging Voltage】


14.4 ~ 15.0 VDC/Unit at 25°C (77°F)

【Self Discharge】

Less than 10% after 90 days, can be stored up to 6 months at 25°C (77°F);
Fully recharging is required before usage, and charged sooner if stored at higher temperature than 25°C (77°F).

Specification Design according with IEC 61056-1/2:2012

Nominal Voltage	12V (6 cells per unit)		
Nominal Capacity	32W @15min-rate to 1.67V per cell @25°C (77°F)		
Weight	Approx. 2.34 Kg (5.16 lbs)		
Maximum Discharge Current	130A (5sec)		
Internal Resistance	Approx. 22.7 mΩ		
Short Circuit Current	335A		
Maximum Charge Current	3.2A		
Terminal types	F2 -Faston Tab250		
Terminal tightening torque	--		
Container Material	ABS (UL 94-HB) & Flame Retardant (94-V0) available upon request		
Dimensions	Length (L)	150.9±2.0 mm	5.94±0.08 inch
	Width (W)	64.8±1.0 mm	2.55±0.04 inch
	Container Height (h)	94.3±1.0 mm	3.71±0.04 inch
	Overall Height (H)	98.6±1.0 mm	3.88±0.04 inch

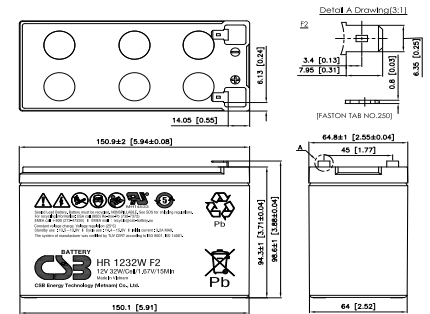

Constant Current Discharge Characteristics Unit: A (25°C, 77°F)

F.V/Time	2MIN	4MIN	5MIN	6MIN	8MIN	10MIN	15MIN	20MIN	30MIN	45MIN	60MIN	90MIN
1.60V	66.4	44.7	38.7	33.9	27.4	23.2	17.1	13.4	9.56	6.80	5.34	3.80
1.67V	61.9	41.9	37.0	32.7	26.7	22.7	16.8	13.3	9.51	6.77	5.32	3.78
1.70V	57.9	40.4	35.8	31.9	26.2	22.4	16.7	13.2	9.47	6.74	5.30	3.77
1.75V	50.8	37.5	33.5	30.0	25.1	21.6	16.3	13.1	9.30	6.63	5.22	3.72
1.80V	43.8	34.4	30.7	27.7	23.4	20.3	15.5	12.5	8.95	6.40	5.04	3.60
1.85V	38.2	31.4	27.3	24.9	21.2	18.6	14.4	11.5	8.24	5.93	4.69	3.38

Constant Power Discharge Characteristics Unit: W (25°C, 77°F)

F.V/Time	2MIN	4MIN	5MIN	6MIN	8MIN	10MIN	15MIN	20MIN	30MIN	45MIN	60MIN	90MIN
1.60V	672	469	410	365	303	259	193	154	111	78.7	62.1	44.4
1.67V	617	451	397	356	297	255	192	153	110	78.4	61.9	44.3
1.70V	590	441	389	349	293	252	190	152	109	78.1	61.6	44.1
1.75V	540	421	370	334	283	244	185	150	108	77.1	60.9	43.6
1.80V	484	399	345	314	267	232	178	144	104	74.7	59.1	42.5
1.85V	417	354	314	289	245	215	166	134	96.6	69.8	55.5	40.1

Please refer to the official site for the latest rating confirmation. URL: www.csb-battery.com

Issued: 210312

Sales Offices

希世比能源科技股份有限公司
CSB Energy Technology Co., Ltd.

BUSINESS HEADQUARTERS

Tel: +886-2-2880-5600
Fax: +886-2-2888-3300

USA OFFICE

Tel: +1-817-244-7777 / 1-(800)3-CSB-USA (272872)
Fax: +1-817-244-4445

SHENZHEN OFFICE (CHINA)

Tel: +86-755-8831-6488, 8831-6775
Fax: +86-755-8831-6075

EUROPE (EMEA) OFFICE

Tel: +31(0)180-418-140
Fax: +31(0)180-418-327

SHANGHAI OFFICE (CHINA)

Tel: +86-21-5046-1622, 5046-0833
Fax: +86-21-5046-1046

Recognized under UL 1989,
and certified by ISO 9001, 14001, 45001, 50001.



TAIPEI OFFICE

Tel: +886-2-2880-5600
Fax: +866-2-2888-3300

BEIJING OFFICE (CHINA)

Tel: +86-10-5820-5336, 5820-5338
Fax: +86-10-5820-3053



HR series HR 1234W



Valve Regulated Lead Acid Battery


Maintenance-Free Sealed Lead Acid Battery.
Absorbent Glass Mat (AGM) technology for efficient gas recombination of up to 99%.

General Design for Standby Power Applications

【Design Life】 Up to 5 Years in Standby Service at 25°C Eurobat (20°C) : 3-5 YEARS STANDARD COMMERCIAL	【Float Charging Voltage】 13.5 ~ 13.8 VDC/Unit at 25°C (77°F)
【Operating Temperature Range】 Nominal Operating Temperature : 25°C (77°F) Discharge : -15°C ~ 50°C (5°F~122°F) Charge: -15°C ~ 40°C (5°F~104°F) Storage: -15°C ~ 40°C (5°F~104°F)	【Equalization Charging Voltage】 14.4 ~ 15.0 VDC/Unit at 25°C (77°F)
	【Self Discharge】 Less than 10% after 90 days, can be stored up to 6 months at 25°C (77°F); Fully recharging is required before usage, and charged sooner if stored at higher temperature than 25°C (77°F).

Specification Design according with IEC 61056-1/2:2012

Nominal Voltage	12V (6 cells per unit)	
Nominal Capacity	34W @15min-rate to 1.67V per cell @25°C (77°F)	
Weight	Approx. 2.50 Kg (5.51 lbs)	
Maximum Discharge Current	130A (5sec)	
Internal Resistance	Approx. 19.0 mΩ	
Short Circuit Current	349A	
Maximum Charge Current	3.4A	
Terminal types	F2 -Faston Tab250	
Terminal tightening torque	--	
Container Material	ABS (UL 94-HB) & Flame Retardant (94-V0) available upon request	
Dimensions	Length (L)	150.9±2.0 mm 5.94±0.08 inch
	Width (W)	64.8±1.0 mm 2.55±0.04 inch
	Container Height (h)	94.3±1.0 mm 3.71±0.04 inch
	Overall Height (H)	98.6±1.0 mm 3.88±0.04 inch

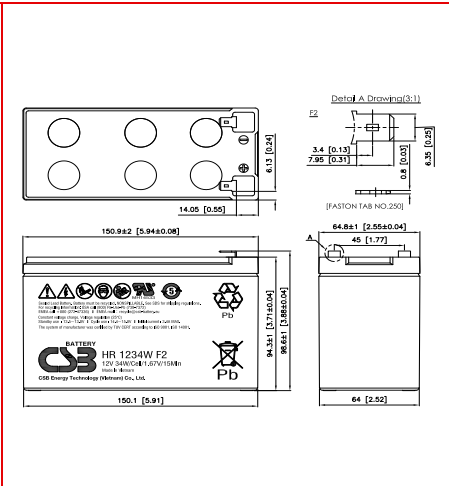

Constant Current Discharge Characteristics Unit: A (25°C, 77°F)

F.V/Time	2MIN	4MIN	5MIN	6MIN	8MIN	10MIN	15MIN	20MIN	30MIN	45MIN	60MIN	90MIN
1.60V	74.0	50.0	42.2	36.8	29.6	24.9	18.0	14.2	10.3	7.36	5.84	4.21
1.67V	67.3	47.5	40.7	35.8	29.0	24.5	17.8	14.1	10.2	7.34	5.82	4.20
1.70V	64.1	45.9	39.7	35.2	28.6	24.2	17.7	14.0	10.1	7.33	5.81	4.19
1.75V	58.3	42.8	37.5	33.6	27.6	23.5	17.4	13.9	10.0	7.27	5.77	4.17
1.80V	52.6	39.1	34.7	31.2	26.0	22.4	16.8	13.5	9.83	7.12	5.67	4.11
1.85V	46.2	35.4	31.2	28.2	23.8	20.6	15.7	12.7	9.38	6.83	5.45	3.96

Constant Power Discharge Characteristics Unit: W (25°C, 77°F)

F.V/Time	2MIN	4MIN	5MIN	6MIN	8MIN	10MIN	15MIN	20MIN	30MIN	45MIN	60MIN	90MIN
1.60V	737	518	450	399	328	280	207	165	120	86.7	69.0	50.1
1.67V	688	502	438	391	324	277	206	164	119	86.5	68.9	50.0
1.70V	677	492	431	386	320	275	205	163	118	86.3	68.8	49.9
1.75V	633	466	413	372	312	268	202	161	117	85.7	68.4	49.8
1.80V	584	434	388	351	298	257	196	157	116	84.3	67.4	49.2
1.85V	519	397	355	324	276	240	185	150	111	81.3	65.2	47.8

Please refer to the official site for the latest rating confirmation. URL: www.csb-battery.com

Issued: 200927

Sales Offices

希世比能源科技股份有限公司
CSB Energy Technology Co., Ltd.

BUSINESS HEADQUARTERS

Tel: +886-2-2880-5600
Fax: +886-2-2888-3300

USA OFFICE

Tel: +1-817-244-7777 / 1-(800)3-CSB-USA (272872)
Fax: +1-817-244-4445

SHENZHEN OFFICE (CHINA)

Tel: +86-755-8831-6488/6775/6075
Fax: +86-755-8831-6548

EUROPE (EMEA) OFFICE

Tel: +31(0)180-418-140
Fax: +31(0)180-418-327

SHANGHAI OFFICE (CHINA)

Tel: +86-21-5046-1622/0833/0094
Fax: +86-21-5046-1046

Recognized under UL 1989,
and certified by ISO 9001, 14001, 45001, 50001.



TAIPEI OFFICE

Tel: +886-2-2880-5600
Fax: +866-2-2888-3300

BEIJING OFFICE (CHINA)

Tel: +86-10-6597-8065/8165/8265
Fax: +86-10-6597-8565



HR series HR 1251W



Valve Regulated Lead Acid Battery

Maintenance-Free Sealed Lead Acid Battery.
Absorbent Glass Mat (AGM) technology for efficient gas recombination of up to 99%.

General Design for Standby Power Applications

【Design Life】

Up to 5 Years in Standby Service at 25°C
Eurobat (20°C) : 3-5 YEARS STANDARD COMMERCIAL

【Operating Temperature Range】

Nominal Operating Temperature : 25°C (77°F)
Discharge : -15°C ~ 50°C (5°F~122°F)
Charge: -15°C ~ 40°C (5°F~104°F)
Storage: -15°C ~ 40°C (5°F~104°F)

【Float Charging Voltage】

13.5 ~ 13.8 VDC/Unit at 25°C (77°F)

【Equalization Charging Voltage】


14.4 ~ 15.0 VDC/Unit at 25°C (77°F)

【Self Discharge】

Less than 10% after 90 days, can be stored up to 6 months at 25°C (77°F);
Fully recharging is required before usage, and charged sooner if stored at higher temperature than 25°C (77°F).

Specification Design according with IEC 61056-1/2:2012

Nominal Voltage	12V (6 cells per unit)	
Nominal Capacity	51W @15min-rate to 1.67V per cell @25°C (77°F)	
Weight	Approx. 3.85 Kg (8.49 lbs)	
Maximum Discharge Current	180A (5sec)	
Internal Resistance	Approx. 13.6 mΩ	
Short Circuit Current	462A	
Maximum Charge Current	5.1A	
Terminal types	F2-Faston Tab250	
Terminal tightening torque	--	
Container Material	ABS (UL 94-HB) & Flame Retardant (94-V0) available upon request	
Dimensions	Length (L)	151.0±2.0 mm 5.94±0.08 inch
	Width (W)	98.0±1.0 mm 3.86±0.04 inch
	Container Height (h)	94.1±1.0 mm 3.70±0.04 inch
	Overall Height (H)	100.3±1.5 mm 3.95±0.06 inch

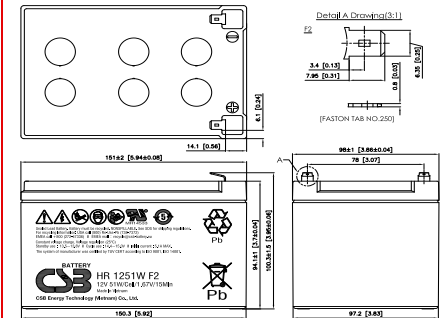

Constant Current Discharge Characteristics Unit: A (25°C, 77°F)

F.V/Time	2MIN	4MIN	5MIN	6MIN	8MIN	10MIN	15MIN	20MIN	30MIN	45MIN	60MIN	90MIN
1.60V	85.8	64.0	56.4	50.8	43.0	36.8	27.1	21.4	15.4	10.9	8.33	6.65
1.67V	82.4	61.6	54.4	49.2	41.8	35.8	26.7	20.9	15.3	10.8	8.29	6.61
1.70V	80.5	60.5	53.3	48.0	41.2	35.2	26.4	20.7	15.2	10.7	8.28	6.58
1.75V	77.2	57.9	51.3	46.4	39.9	34.3	25.7	20.3	15.1	10.6	8.24	6.52
1.80V	72.9	54.8	48.9	44.6	38.3	32.9	24.8	19.9	14.9	10.5	8.20	6.44
1.85V	68.6	51.6	46.5	42.7	36.5	31.6	23.9	19.6	14.7	10.4	8.16	6.36

Constant Power Discharge Characteristics Unit: W (25°C, 77°F)

F.V/Time	2MIN	4MIN	5MIN	6MIN	8MIN	10MIN	15MIN	20MIN	30MIN	45MIN	60MIN	90MIN
1.60V	1030	768	675	607	511	441	325	257	185	130	100	79.8
1.67V	990	742	651	585	500	430	320	251	184	129	99.6	79.4
1.70V	969	726	637	573	494	422	317	249	183	128	99.3	79.0
1.75V	927	695	612	552	479	408	310	244	181	127	98.9	78.3
1.80V	875	657	585	532	460	393	300	239	179	126	98.4	77.3
1.85V	824	619	558	513	441	379	290	235	177	125	97.9	76.4

Please refer to the official site for the latest rating confirmation. URL: www.csb-battery.com

Issued: 201102

Sales Offices

希世比能源科技股份有限公司
CSB Energy Technology Co., Ltd.

BUSINESS HEADQUARTERS

Tel: +886-2-2880-5600
Fax: +886-2-2888-3300

USA OFFICE

Tel: +1-817-244-7777 / 1-(800)3-CSB-USA (272872)
Fax: +1-817-244-4445

SHENZHEN OFFICE (CHINA)

Tel: +86-755-8831-6488/6775/6075
Fax: +86-755-8831-6548

EUROPE (EMEA) OFFICE

Tel: +31(0)180-418-140
Fax: +31(0)180-418-327

SHANGHAI OFFICE (CHINA)

Tel: +86-21-5046-1622/0833/0094
Fax: +86-21-5046-1046

Recognized under UL 1989,
and certified by ISO 9001, 14001, 45001, 50001.



TAIPEI OFFICE

Tel: +886-2-2880-5600
Fax: +866-2-2888-3300

BEIJING OFFICE (CHINA)

Tel: +86-10-6597-8065/8165/8265
Fax: +86-10-6597-8565



HR series HR 1290W



Valve Regulated Lead Acid Battery

Maintenance-Free Sealed Lead Acid Battery.
Absorbent Glass Mat (AGM) technology for efficient gas recombination of up to 99%.

General Design for Standby Power Applications

【Design Life】

Up to 5 Years in Standby Service at 25°C
Eurobat (20°C) : 3-5 YEARS STANDARD COMMERCIAL

【Operating Temperature Range】

Nominal Operating Temperature : 25°C (77°F)
Discharge : -15°C ~ 50°C (5°F~122°F)
Charge: -15°C ~ 40°C (5°F~104°F)
Storage: -15°C ~ 40°C (5°F~104°F)

【Float Charging Voltage】

13.5 ~ 13.8 VDC/Unit at 25°C (77°F)

【Equalization Charging Voltage】


14.4 ~ 15.0 VDC/Unit at 25°C (77°F)

【Self Discharge】

Less than 10% after 90 days, can be stored up to 6 months at 25°C (77°F);
Fully recharging is required before usage, and charged sooner if stored at higher temperature than 25°C (77°F).

Specification Design according with IEC 61056-1/2:2012

Nominal Voltage	12V (6 cells per unit)	
Nominal Capacity	90W @15min-rate to 1.67V per cell @25°C (77°F)	
Weight	Approx. 6.80 Kg (14.99 lbs)	
Maximum Discharge Current	300A (5sec)	
Internal Resistance	Approx. 9.9 mΩ	
Short Circuit Current	836A	
Maximum Charge Current	9.0A	
Terminal types	I1 terminal to accept M5 bolt	
Terminal tightening torque	30.4±6.1 Kgf·cm / 26.4±5.3 Lbf·in / 3.0±0.6 N·m	
Container Material	ABS (UL 94-HB) & Flame Retardant (94-V0) available upon request	
Dimensions	Length (L)	181.0±2.0 mm 7.13±0.08 inch
	Width (W)	76.2±2.0 mm 3.00±0.08 inch
	Container Height (h)	167.0±2.0 mm 6.57±0.08 inch
	Overall Height (H)	167.0±2.0 mm 6.57±0.08 inch

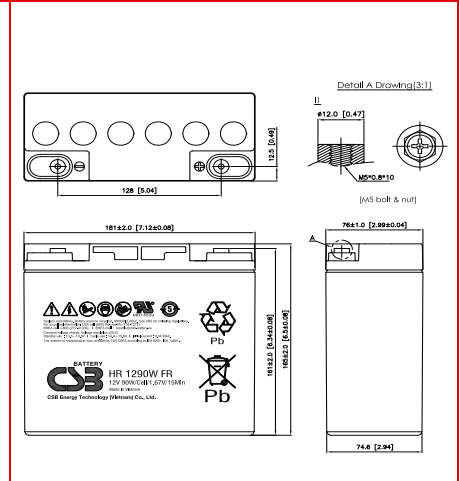

Constant Current Discharge Characteristics Unit: A (25°C, 77°F)

F.V/Time	2MIN	4MIN	5MIN	6MIN	8MIN	10MIN	15MIN	20MIN	30MIN	45MIN	60MIN	90MIN
1.60V	177	124	108	95.8	79.4	68.0	48.7	38.4	27.3	19.8	15.8	11.5
1.67V	156	114	100	90.2	77.6	65.2	48.4	38.1	27.0	19.7	15.7	11.4
1.70V	147	109	96.8	87.8	76.4	63.9	47.6	37.7	26.9	19.6	15.6	11.3
1.75V	131	102	91.0	82.9	72.8	61.1	46.2	37.0	26.3	19.3	15.5	11.2
1.80V	115	92.5	83.7	77.2	67.7	58.0	44.0	35.5	25.5	18.8	15.2	11.1
1.85V	98.6	82.9	76.0	70.8	60.8	53.3	40.7	32.6	23.8	17.8	14.5	10.6

Constant Power Discharge Characteristics Unit: W (25°C, 77°F)

F.V/Time	2MIN	4MIN	5MIN	6MIN	8MIN	10MIN	15MIN	20MIN	30MIN	45MIN	60MIN	90MIN
1.60V	1701	1282	1143	1041	868	753	544	429	309	227	183	133
1.67V	1570	1193	1076	989	850	734	540	428	307	226	182	132
1.70V	1509	1155	1044	962	838	726	534	426	305	225	181	131
1.75V	1398	1087	987	913	802	704	520	416	300	222	179	130
1.80V	1282	1011	926	862	756	665	501	402	295	219	177	129
1.85V	1166	926	853	797	687	608	461	375	277	207	168	124

Please refer to the official site for the latest rating confirmation. URL: www.csb-battery.com

Issued: 200927

Sales Offices

希世比能源科技股份有限公司
CSB Energy Technology Co., Ltd.

BUSINESS HEADQUARTERS

Tel: +886-2-2880-5600
Fax: +886-2-2888-3300

USA OFFICE

Tel: +1-817-244-7777 / 1-(800)3-CSB-USA (272872)
Fax: +1-817-244-4445

SHENZHEN OFFICE (CHINA)

Tel: +86-755-8831-6488/6775/6075
Fax: +86-755-8831-6548

EUROPE (EMEA) OFFICE

Tel: +31(0)180-418-140
Fax: +31(0)180-418-327

SHANGHAI OFFICE (CHINA)

Tel: +86-21-5046-1622/0833/0094
Fax: +86-21-5046-1046

Recognized under UL 1989,
and certified by ISO 9001, 14001, 45001, 50001.



TAIPEI OFFICE

Tel: +886-2-2880-5600
Fax: +866-2-2888-3300

BEIJING OFFICE (CHINA)

Tel: +86-10-6597-8065/8165/8265
Fax: +86-10-6597-8565



HR series HR 12120W



Valve Regulated Lead Acid Battery

Maintenance-Free Sealed Lead Acid Battery.
Absorbent Glass Mat (AGM) technology for efficient gas recombination of up to 99%.

General Design for Standby Power Applications

【Design Life】

Up to 5 Years in Standby Service at 25°C
Eurobat (20°C) : 3-5 YEARS STANDARD COMMERCIAL

【Operating Temperature Range】

Nominal Operating Temperature : 25°C (77°F)
Discharge : -15°C ~ 50°C (5°F~122°F)
Charge: -15°C ~ 40°C (5°F~104°F)
Storage: -15°C ~ 40°C (5°F~104°F)

【Float Charging Voltage】

13.5 ~ 13.8 VDC/Unit at 25°C (77°F)

【Equalization Charging Voltage】


14.4 ~ 15.0 VDC/Unit at 25°C (77°F)

【Self Discharge】

Less than 10% after 90 days, can be stored up to 6 months at 25°C (77°F);
Fully recharging is required before usage, and charged sooner if stored at higher temperature than 25°C (77°F).

Specification Design according with IEC 61056-1/2:2012

Nominal Voltage	12V (6 cells per unit)	
Nominal Capacity	120W @15min-rate to 1.67V per cell @25°C (77°F)	
Weight	Approx. 10.20 Kg (22.48 lbs)	
Maximum Discharge Current	225A (5sec)	
Internal Resistance	Approx. 8.2 mΩ	
Short Circuit Current	928A	
Maximum Charge Current	12A	
Terminal types	I1 terminal to accept M5 bolt	
Terminal tightening torque	30.4±6.1 Kgf-cm / 26.4±5.3 Lbf-in / 3.0±0.6 N-m	
Container Material	ABS (UL 94-HB) & Flame Retardant (94-V0) available upon request	
Dimensions	Length (L)	166.0±2.0 mm 6.54±0.08 inch
	Width (W)	125.0±1.5 mm 4.92±0.06 inch
	Container Height (h)	175.0±2.0 mm 6.89±0.08 inch
	Overall Height (H)	175.0±2.0 mm 6.89±0.08 inch

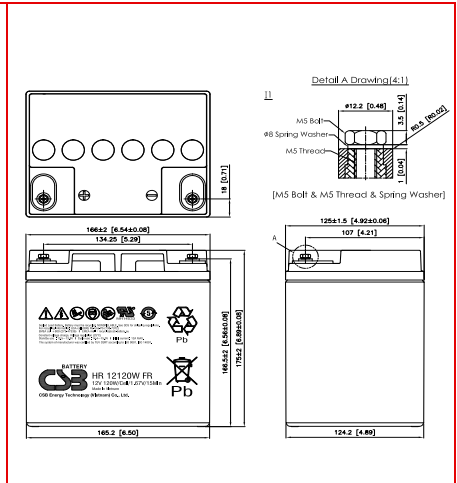

Constant Current Discharge Characteristics Unit: A (25°C, 77°F)

F.V/Time	2MIN	4MIN	5MIN	6MIN	8MIN	10MIN	15MIN	20MIN	30MIN	45MIN	60MIN	90MIN
1.60V	169	148	135	125	107	94.2	70.5	56.1	41.2	30.4	24.5	16.8
1.67V	153	135	124	115	100	88.9	67.0	53.6	39.7	29.6	24.0	16.6
1.70V	146	128	117	109	95.5	85.6	65.3	52.5	39.2	29.2	23.7	16.4
1.75V	132	117	108	101	88.9	80.2	62.0	50.4	37.8	28.3	23.1	16.2
1.80V	117	105	97.2	91.2	81.3	73.3	58.3	48.0	36.0	27.1	22.2	15.8
1.85V	100	92.5	86.8	82.4	74.3	67.3	54.3	45.7	34.6	26.0	21.2	15.2

Constant Power Discharge Characteristics Unit: W (25°C, 77°F)

F.V/Time	2MIN	4MIN	5MIN	6MIN	8MIN	10MIN	15MIN	20MIN	30MIN	45MIN	60MIN	90MIN
1.60V	1745	1622	1507	1419	1199	1030	771	621	462	348	284	197
1.67V	1608	1495	1393	1315	1119	975	738	600	453	341	279	194
1.70V	1539	1427	1333	1260	1084	947	724	590	447	337	276	193
1.75V	1412	1306	1224	1161	1012	895	701	578	435	329	270	190
1.80V	1273	1181	1113	1060	944	853	676	561	418	319	263	186
1.85V	1100	1045	1001	966	877	805	648	536	402	307	253	181

Please refer to the official site for the latest rating confirmation. URL: www.csb-battery.com

Issued: 201102

Sales Offices

希世比能源科技股份有限公司
CSB Energy Technology Co., Ltd.

BUSINESS HEADQUARTERS

Tel: +886-2-2880-5600
Fax: +886-2-2888-3300

USA OFFICE

Tel: +1-817-244-7777 / 1-(800)3-CSB-USA (272872)
Fax: +1-817-244-4445

SHENZHEN OFFICE (CHINA)

Tel: +86-755-8831-6488/6775/6075
Fax: +86-755-8831-6548

EUROPE (EMEA) OFFICE

Tel: +31(0)180-418-140
Fax: +31(0)180-418-327

SHANGHAI OFFICE (CHINA)

Tel: +86-21-5046-1622/0833/0094
Fax: +86-21-5046-1046

Recognized under UL 1989,
and certified by ISO 9001, 14001, 45001, 50001.



TAIPEI OFFICE

Tel: +886-2-2880-5600
Fax: +866-2-2888-3300

BEIJING OFFICE (CHINA)

Tel: +86-10-6597-8065/8165/8265
Fax: +86-10-6597-8565