

# HRT18 Fuse

Standard: IEC 60269



# HRT18 Fuse

Standard: IEC 60269




## Order Information

Holder of fuse	Pole	Rated Current In(A)	Note	Weight (g)	Reference
HRT18-32X	1P	32	Material: Resin	82	HRT1832ZXB
	2P		With indicator		HRT1832Z2XB
	3P				HRT1832Z3XB
HRT18-32	1P	32	Material: Resin	82	HRT1832ZB
	2P		Without indicator		HRT1832Z2B
	3P				HRT1832Z3B
HRT18-32X	1P	32	Material: Nylon	82	HRT1832ZX
	2P		With indicator		HRT1832Z2X
	3P				HRT1832Z3X
HRT18-32	1P	32	Material: Nylon	82	HRT1832Z
	2P		Without indicator		HRT1832Z2
	3P				HRT1832Z3
HRT18-63X	1P	63	Material: Resin	206	HRT1863ZXB
	2P		With indicator		HRT1863Z2XB
	3P				HRT1863Z3XB
HRT18-63	1P	63	Material: Resin	206	HRT1863ZB
	2P		Without indicator		HRT1863Z2B
	3P				HRT1863Z3B


## Technical Data

Rated operating current	2-63A
Rated operating voltage	AC380V-500V
Rated breaking capacity	100kA

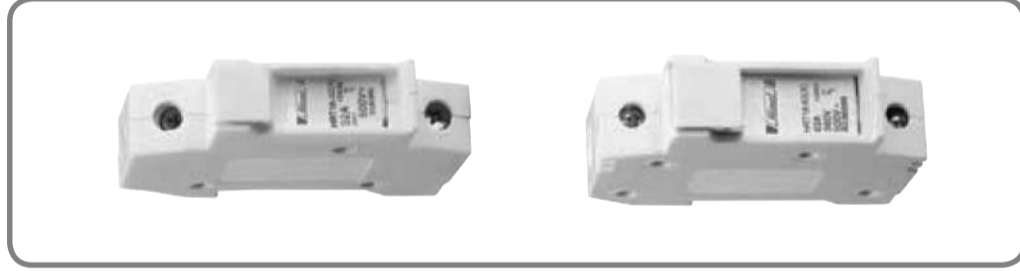


## Overall Dimensions

Unit: mm

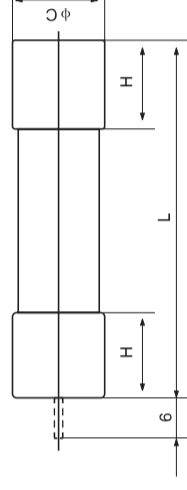

Cylindrical Fuse

Type	Size	L	C	Hmax
HRT18-32	10x38	38±0.6	10.3±0.1	10.5
HRT18-63	14x51	51 <sup>+0.6</sup> <sub>-0.6</sub>	14.3±0.1	13.8

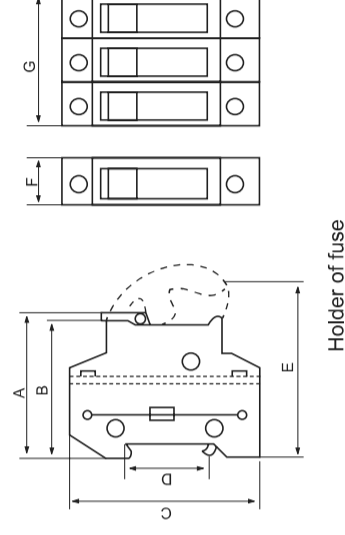

Holder of fuse

Type	A	B	C	D	E	F	G
HRT18-32	63	60	79	35	80	18	54
HRT18-63	78	76	103	35	110	25	75