

Metal One-touch Fittings

KQB2 Series

Compact and Light



Approx. **30%** Shorter
* Comparison with KQBL06-01S




Approx. **62%** Lighter
* Comparison with KQBL06-01S

New

KQB2L06-01S

15.9 mm




RoHS

Current model

KQBL06-01S

22.1 mm



10.2 g

27 g

Fluid temperature **-5 to 150°C**

Connection thread M, R, Rc, UNF, NPT, G

Applicable tubing material FEP • PFA • Nylon • Soft nylon
Polyurethane • Polyolefin


Electroless nickel plated (Brass parts)

Grease-free

Variations

		Applicable tubing O.D. (mm)						
		ø3.2	ø4	ø6	ø8	ø10	ø12	ø16
Connection thread	M5	●	●	●				
	R1/8	●	●	●	●	●		
	G1/8		●	●	●	●	●	
	R1/4	●	●	●	●	●	●	
	G1/4		●	●	●	●	●	●
	R3/8			●	●	●	●	●
	G3/8			●	●	●	●	●
	R1/2				●	●	●	●
	G1/2				●	●	●	●
	No thread	●	●	●	●	●	●	●

		Applicable tubing O.D. (inch)					
		ø1/8"	ø5/32"	ø1/4"	ø5/16"	ø3/8"	ø1/2"
Connection thread	10-32 UNF	●	●	●			
	NPT1/8	●	●	●	●	●	
	NPT1/4	●	●	●	●	●	●
	NPT3/8			●	●	●	●
	NPT1/2				●	●	●
	No thread	●	●	●	●	●	●

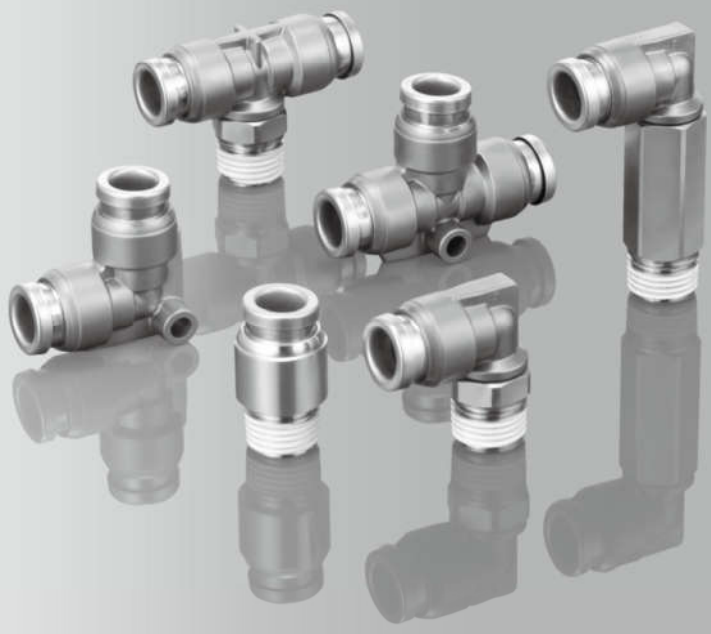

- KQ2
- KQB2**
- KS
- KX
- KM
- KF
- M
- H/DL
- L/LL
- KC
- KK
- KK130
- DM
- KDM
- KB
- KR
- KA
- KQG2
- KG
- KFG2
- MS
- KKA
- KP
- LQ
- MQR
- T
- IDK

Metal One-touch Fittings

KQB2 Series


Compact and light

Dimensions: Approx. **30%** shorter

* Comparison with KQBL06-01S

Weight: Approx. **62%** lighter

* Comparison with KQBL06-01S

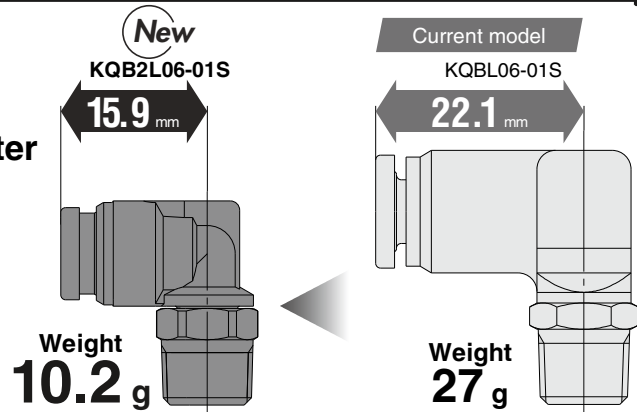

○ Inch size x UNF/NPT thread,
Metric size x G thread

○ Applicable tubing size

ø3.2 to ø16, ø1/8" to ø1/2"



○ Connection thread: M, R, Rc, UNF, NPT, G

○ Fluid temperature: **-5 to 150°C**

○ Grease-free

○ Applicable tubing material
FEP • PFA • Nylon • Soft nylon
Polyurethane • Polyolefin

○ Electroless nickel plated
(Brass parts)

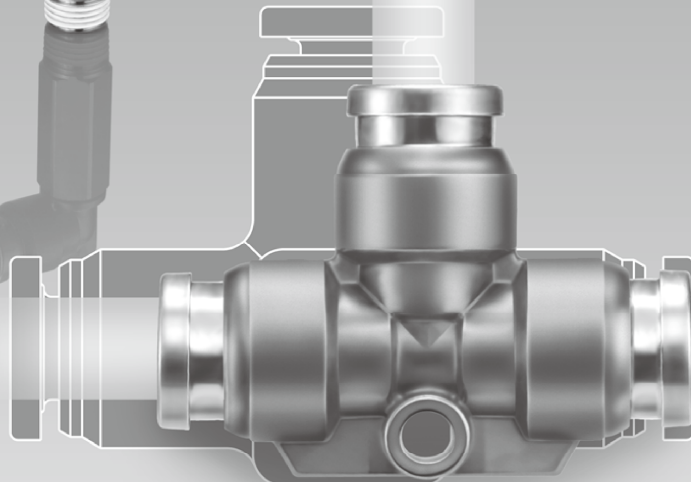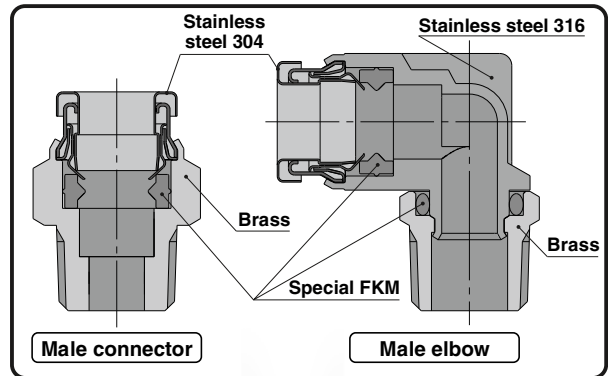

Variations

Male Connector **KQB2H**



Metric
R thread ... P. 143
G thread ... P. 156
Inch ... P. 150

Hexagon Socket Head Male Connector **KQB2S**



Metric
R thread ... P. 143
G thread ... P. 156
Inch ... P. 150

Straight Union **KQB2H**



Metric ... P. 143
Inch ... P. 150

Male Elbow **KQB2L**



Metric
R thread ... P. 144
G thread ... P. 157
Inch ... P. 151

Male Branch Tee **KQB2T**



Metric
R thread ... P. 144
G thread ... P. 157
Inch ... P. 151

Union Elbow **KQB2L**



Metric ... P. 145
Inch ... P. 151

Bulkhead Union **KQB2E**



Metric ... P. 145
Inch ... P. 152

Union Tee **KQB2T**



Metric ... P. 145
Inch ... P. 152

Union "Y" **KQB2U**



Metric ... P. 145
Inch ... P. 152

Different Diameter Tee **KQB2T**



Metric ... P. 146
Inch ... P. 152

Plug-in Reducer **KQB2R**



Metric ... P. 146
Inch ... P. 152

Different Diameter Straight **KQB2H**




Metric ... P. 146
Inch ... P. 153

Different Diameter Union "Y" **KQB2U**



Metric ... P. 146
Inch ... P. 153

Bulkhead Connector **KQB2E**



Metric
Rc thread ... P. 147
G thread ... P. 158
Inch ... P. 153

Extended Male Elbow **KQB2W**



Metric
R thread ... P. 147
G thread ... P. 158
Inch ... P. 153

Female Connector **KQB2F**



Metric
Rc thread ... P. 148
G thread ... P. 158
Inch ... P. 154

Plug **KQB2P**



Metric ... P. 148
Inch ... P. 154

- KQ2**
- KQB2**
- KS
- KX
- KM**
- KF**
- M**
- H/DL
- L/LL
- KC**
- KK**
- KK130
- DM**
- KDM**
- KB**
- KR**
- KA**
- KQG2**
- KG**
- KFG2**
- MS**
- KKA**
- KP**
- LQ**
- MQR**
- T**
- IDK**

Metal One-touch Fittings

Applicable Tubing: Metric Size, Connection Thread: M, R, Rc

KQB2 Series

RoHS



Applicable Tubing

Tubing material	FEP, PFA, Nylon, Soft nylon, Polyurethane, Polyolefin
Tubing O.D.	ø3.2, ø4, ø6, ø8, ø10, ø12, ø16

Specifications

Fluid	Air, Water ^{Note 2)}
Operating pressure range ^{Note 1)}	-100 kPa to 1 MPa ^{Note 3)}
Proof pressure	3.0 MPa
Ambient and fluid temperature ^{Note 4)}	-5 to 150°C (No freezing) ^{Note 3)}
Lubricant	Grease-free specification
Seal on the threads	With sealant

- Note 1) Avoid using in a vacuum holding application such as a leak tester, since there is leakage.
 Note 2) Deionized water is not recommended for use as it may affect the material used in the fittings. In addition, it is known to degrade the water quality.
 Note 3) Check the operating pressure range and operating temperature range of the tubing.
 Note 4) It is recommended that you use the inner sleeve in the following conditions (Except ø3.2):
- When using in an environment where the fluid temperature changes drastically.
 - When using at a high temperature.

* Temperature Condition of Mounting the Inner Sleeve

Tubing	Temperature
FEP tubing/TH Series	80°C or more
Super PFA tubing/TL Series	120°C or more

Spare Parts


Description	Tubing O.D.	Part no.	Material
Gasket	—	M-5G3	Stainless steel 316, Special FKM
Bulkhead nut	ø3.2 ø4	KQB223-P01	C3604 (Electroless nickel plated)
	ø6	KQB206-P01	
	ø8	KQB208-P01	
	ø10	KQB210-P01	
	ø12	KQB212-P01	
	ø16	KQB216-P01	

Cross Reference Table of the Inner Sleeve

Tubing O.D.	Tubing material			Applicable inner sleeve	
	TUS (Soft polyurethane)	TH/TH (FEP)	TL/TIL (Super PFA)	Part no.	Length
ø4	—	TH0402	—	TJ-0402	18
	TUS0425	TH0425	—	TJ-0425	18
	—	—	TL0403	TJ-0403	18
ø6	TUS0604	TH0604	TL0604	TJ-0604	19
	TUS0805	—	—	TJ-0805	20.5
ø8	—	TH0806	TL0806	TJ-0806	20.5
	TUS1065	—	—	TJ-1065	23
ø10	—	TH1075	—	TJ-1075	23
	—	TH1008	TL1008	TJ-1008	24
	TUS1208	—	—	TJ-1208	24
ø12	—	TH1209	—	TJ-1209	24
	—	TH1210	TL1210	TJ-1210	24
	—	—	—	—	—

* C2700 + Electroless nickel plated is used for the TJ series.

Construction

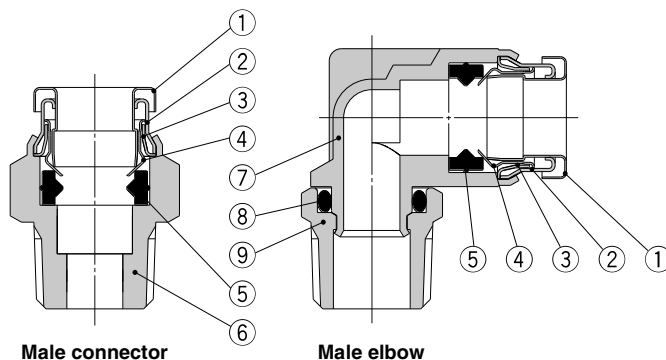

Component Parts

No.	Description	Material
1	Release button	Stainless steel 304
2	Guide 1	Stainless steel 304
3	Guide 2	Stainless steel 304
4	Chuck	Stainless steel 304
5	Seal	Special FKM (Fluoro coated)
6	Male connector body	C3604 (Electroless nickel plated)
7	Male elbow body	Stainless steel 316
8	O-ring	Special FKM (Fluoro coated)
9	Stud	C3604 (Electroless nickel plated)

Metal One-touch Fittings **KQB2 Series**

Applicable Tubing: Metric Size, Connection Thread: M, R, Rc

Dimensions


Male Connector: KQB2H




Applicable tubing O.D. (mm)	Connection thread R, M	Model	H (Width across flat)	øD	L	A*	M	Note 1) Effective area (mm ²)	Weight (g)
ø3.2	M5 x 0.8	KQB2H23-M5	8	—	16.5	13.5	12	3	3.4
	1/8	KQB2H23-01S	10		15.4	12.3			6
	1/4	KQB2H23-02S	14		21	16.3			17.8
ø4	M5 x 0.8	KQB2H04-M5	10	—	17.1	14.1	12.6	4	5.3
	1/8	KQB2H04-01S	—		15.3	12.2			5.6
	1/4	KQB2H04-02S	14		20.9	16.2			17.2
ø6	M5 x 0.8	KQB2H06-M5	12	—	19.1	16.1	13.6	4	8
	1/8	KQB2H06-01S	—		18.1	15			7.3
	1/4	KQB2H06-02S	14		20.8	16.1			15.2
	3/8	KQB2H06-03S	17		23	17.9			28.8
ø8	1/8	KQB2H08-01S	14	—	24.5	21.4	16.1	26.1	13.5
	1/4	KQB2H08-02S	—		22.3	17.6			26
	3/8	KQB2H08-03S	17		23.7	18.6			26
ø10	1/8	KQB2H10-01S	17	—	25.5	22.4	17	26.1	19.8
	1/4	KQB2H10-02S	—		27.9	23.2			22.7
	3/8	KQB2H10-03S	22		23	17.9			21.6
	1/2	KQB2H10-04S	22		28.6	22.2			53.9
ø12	1/4	KQB2H12-02S	19	—	30.5	25.8	18.6	58.3	28.8
	3/8	KQB2H12-03S	—		24.7	19.6			21.5
	1/2	KQB2H12-04S	22		28.7	22.3			47
ø16	3/8	KQB2H16-03S	24	24.6	33.6	28.5	20.8	81	48.3
	1/2	KQB2H16-04S	—		29.5	23.1			113

* Reference dimensions after installation for R thread
 Note) Value of FEP tubing.
 Value of nylon tubing for ø16 only.

(M5)



(R)



KQ2

KQB2

KS

KX

KM

KF

M

H/DL

L/LL

KC

KK

KK130

DM

KDM

KB

KR

KA

KQG2

KG

KFG2

MS

KKA

KP

LQ

MQR

T

IDK


Hexagon Socket Head Male Connector: KQB2S




Applicable tubing O.D. (mm)	Connection thread R, M	Model	H (Width across flat)	Note 1) øD	L	A*	M	Note 2) Effective area (mm ²)	Weight (g)	
ø3.2	M5 x 0.8	KQB2S23-M5	2	9	16.5	13.5	12	3	4	
ø4	M5 x 0.8	KQB2S04-M5	2	9	17.1	14.1	12.6	4	3.9	
	1/8	KQB2S04-01S	3	10	20.4	17.3		4.1	7.9	
ø6	M5 x 0.8	KQB2S06-M5	2	12	19.6	16.6	13.6	4	7.8	
	1/8	KQB2S06-01S	4		—	17.5		10	9.1	
	1/4	KQB2S06-02S	14		15.9	10.7		14.7		
ø8	1/8	KQB2S08-01S	5	14	24.7	21.6	16.1	17.2	13	
	1/4	KQB2S08-02S	6		—	22.9		18.2	23.3	13.5
	3/8	KQB2S08-03S	17		23.1	18		24		
ø10	1/8	KQB2S10-01S	5	17	25.6	22.5	17	17.2	18.6	
	1/4	KQB2S10-02S	8		—	27.5		22.8	39	20
	3/8	KQB2S10-03S	8		—	18.9		17	39	22
	1/2	KQB2S10-04S	22		24	17.6		39.2		
ø12	1/4	KQB2S12-02S	8	19	30.6	25.9	18.6	46	26	
	3/8	KQB2S12-03S	10		—	24.9		19.8	60	20.2
	1/2	KQB2S12-04S	22		18.5	35.3				
ø16	3/8	KQB2S16-03S	10	24.6	33.2	28.1	20.8	81	43.6	
	1/2	KQB2S16-04S	12		29.4	23		113	40.3	

* Reference dimensions after installation for R thread
 Note 1) For the ø16, this dimension refers to the O.D. of the release button.
 Note 2) Value of FEP tubing.
 Value of nylon tubing for ø16 only.

(M5)



(R)




Straight Union: KQB2H



Applicable tubing O.D. (mm)	Model	øD Note 1)	L	M	Note 2) Effective area (mm ²)	Weight (g)
ø3.2	KQB2H23-00	9	25	12	3.4	6.8
ø4	KQB2H04-00	9	26.2	12.6	5.6	6.8
ø6	KQB2H06-00	12	28.2	13.6	13.1	12
ø8	KQB2H08-00	14	33.2	16.1	26.1	17.4
ø10	KQB2H10-00	17	35	17	41.5	27.2
ø12	KQB2H12-00	19	38.2	18.6	58.3	33.7
ø16	KQB2H16-00	24.6	42.6	20.8	113	56.1

Note 1) For the ø16, this dimension refers to the O.D. of the release button.
 Note 2) Value of FEP tubing.
 Value of nylon tubing for ø16 only.



KQB2 Series

Applicable Tubing: Metric Size, Connection Thread: M, R, Rc

Dimensions

Male Elbow: KQB2L





Applicable tubing O.D. (mm)	Connection thread R, M	Model	H (Width across flat)	Note 1) ϕD	L1	L2	A*	M	Note 2) Effective area (mm ²)	Weight (g)
$\phi 3.2$	M5 x 0.8	KQB2L23-M5	8	8.3	13.1	14.8	16	12	2.6	6.5
	1/8	KQB2L23-01S	10		13.6	14.9	15.9			8
	1/4	KQB2L23-02S	14		13.7	15.2	16.8			16.6
$\phi 4$	M5 x 0.8	KQB2L04-M5	8	9.1	13.7	15.2	16.8	12.6	3.5	7
	1/8	KQB2L04-01S	10		14.4	15.3	16.7			8.6
	1/4	KQB2L04-02S	14		19.1	18.9	17.5			17.5
$\phi 6$	M5 x 0.8	KQB2L06-M5	8	11.4	14.7	16.3	19	13.6	11.4	9
	1/8	KQB2L06-01S	10		15.9	16.4	19			10.2
	1/4	KQB2L06-02S	14		20.2	21.2	21.2			19.1
	3/8	KQB2L06-03S	17		21.6	22.2	22.2			31.2
$\phi 8$	1/8	KQB2L08-01S	12	13.7	18.6	18.3	22	16.1	21.6	14.8
	1/4	KQB2L08-02S	14		19.1	21.5	23.6			20.8
	3/8	KQB2L08-03S	17		22.9	24.6	24.6			32.8
$\phi 10$	1/8	KQB2L10-01S	12	16.6	20	19.7	24.9	17	35.2	20.4
	1/4	KQB2L10-02S	14		21	22.9	26.5			23.7
	3/8	KQB2L10-03S	17		24.3	27.5	27.5			34.5
	1/2	KQB2L10-04S	22		28.5	30.4	30.4			62.6
$\phi 12$	1/4	KQB2L12-02S	14	18.7	22.6	24	28.6	18.6	50.2	27.4
	3/8	KQB2L12-03S	17		23.6	25.3	29.5			34.3
	1/2	KQB2L12-04S	22		29.5	32.4	32.4			60.8
$\phi 16$	3/8	KQB2L16-03S	19	24.6	26.3	28	34.5	20.8	71	47
	1/2	KQB2L16-04S	22		27.3	31.8	37			100

* Reference dimensions after installation for R thread

Note 1) For the $\phi 16$, this dimension refers to the O.D. of the release button.

Note 2) Value of FEP tubing.

Value of nylon tubing for $\phi 16$ only.



Male Branch Tee: KQB2T





Applicable tubing O.D. (mm)	Connection thread R, M	Model	H (Width across flat)	Note 1) ϕD	L1	L2	A*	M	Note 2) Effective area (mm ²)	Weight (g)
$\phi 3.2$	M5 x 0.8	KQB2T23-M5	8	8.3	13.1	14.8	16	12	3.2	8.2
	1/8	KQB2T23-01S	10		13.6	14.9	15.9			9.6
	1/4	KQB2T23-02S	14		13.7	15.2	16.8			18.4
$\phi 4$	M5 x 0.8	KQB2T04-M5	8	9.1	13.7	15.2	16.8	12.6	4.5	9.1
	1/8	KQB2T04-01S	10		14.4	15.3	16.7			10.6
	1/4	KQB2T04-02S	14		19.1	18.9	19.4			19.4
$\phi 6$	M5 x 0.8	KQB2T06-M5	8	11.4	14.7	16.3	19	13.6	13.9	12.1
	1/8	KQB2T06-01S	10		15.9	16.4	19			13.6
	1/4	KQB2T06-02S	14		20.2	21.2	21.2			22.5
	3/8	KQB2T06-03S	17		21.6	22.2	22.2			35
$\phi 8$	1/8	KQB2T08-01S	12	13.7	18.6	18.3	22	16.1	26.3	20
	1/4	KQB2T08-02S	14		19.1	21.5	23.6			26.1
	3/8	KQB2T08-03S	17		22.9	24.6	24.6			38
$\phi 10$	1/8	KQB2T10-01S	12	16.6	20	19.7	24.9	17	40.8	28.6
	1/4	KQB2T10-02S	14		21	22.9	26.5			31.5
	3/8	KQB2T10-03S	17		24.3	27.5	27.5			42.4
	1/2	KQB2T10-04S	22		28.5	30.4	30.4			70.4
$\phi 12$	1/4	KQB2T12-02S	14	18.7	22.6	24	28.6	18.6	57.2	38.1
	3/8	KQB2T12-03S	17		23.6	25.3	29.5			39.7
	1/2	KQB2T12-04S	22		29.5	32.4	32.4			70.8
$\phi 16$	3/8	KQB2T16-03S	19	24.6	26.3	28	34.5	20.8	71	64.4
	1/2	KQB2T16-04S	22		27.3	31.8	37			100

* Reference dimensions after installation for R thread

Note 1) For the $\phi 16$, this dimension refers to the O.D. of the release button.

Note 2) Value of FEP tubing.

Value of nylon tubing for $\phi 16$ only.



Metal One-touch Fittings **KQB2 Series**

Applicable Tubing: Metric Size, Connection Thread: M, R, Rc

Dimensions

Union Elbow: KQB2L




Applicable tubing O.D. (mm)	Model	Note 1) ϕD	L	A	Q	M	ϕN	ϕO	Note 2) Effective area (mm ²)	Weight (g)
$\phi 3.2$	KQB2L23-00	8.3	13.6	19.3	2.9	12	3.2	5.6	3	6.3
$\phi 4$	KQB2L04-00	9.1	14.6	20.5	3.1	12.6	3.2	5.6	4.2	7.4
$\phi 6$	KQB2L06-00	11.4	16.6	23	3.6	13.6	3.2	5.6	11.4	11
$\phi 8$	KQB2L08-00	13.7	20.1	29.1	5	16.1	4.2	8	21.6	20.2
$\phi 10$	KQB2L10-00	16.6	22	31.7	5.7	17	4.2	8	35.2	29.6
$\phi 12$	KQB2L12-00	18.7	24.6	35	6.4	18.6	4.2	8	50.2	37.1
$\phi 16$	KQB2L16-00	24.6	28.8	40.5	7.7	20.8	4.2	8	100	59.7

Note 1) For the $\phi 16$, this dimension refers to the O.D. of the release button.

Note 2) Value of FEP tubing.

Value of nylon tubing for $\phi 16$ only.




Bulkhead Union: KQB2E



Applicable tubing O.D. (mm)	Model	T (M)	H (Width across flat)	L	Mounting hole	M	Note) Effective area (mm ²)	Weight (g)
$\phi 3.2$	KQB2E23-00	M10 x 1	12	32.2	11	12	3.4	14.8
$\phi 4$	KQB2E04-00	M10 x 1	12	32.4	11	12.6	5.6	14.7
$\phi 6$	KQB2E06-00	M14 x 1	17	35.4	15	13.6	13.1	29.2
$\phi 8$	KQB2E08-00	M15 x 1	19	38.8	16	16.1	26.1	34.9
$\phi 10$	KQB2E10-00	M18 x 1	21	40	19	17	41.5	47.1
$\phi 12$	KQB2E12-00	M20 x 1	24	42.4	21	18.6	58.3	58.7
$\phi 16$	KQB2E16-00	M27 x 1	30	46.8	28	20.8	113	107.2

Note) Value of FEP tubing.

Value of nylon tubing for $\phi 16$ only.



Union Tee: KQB2T




Applicable tubing O.D. (mm)	Model	Note 1) ϕD	L	A	Q	M	ϕN	ϕO	Note 2) Effective area (mm ²)	Weight (g)
$\phi 3.2$	KQB2T23-00	8.3	13.6	20.5	4.1	12	3.2	5.6	3.4	7.9
$\phi 4$	KQB2T04-00	9.1	14.6	21.8	4.4	12.6	3.2	5.6	6.4	9.5
$\phi 6$	KQB2T06-00	11.4	16.6	24.6	5.2	13.6	3.2	5.6	13.4	14.2
$\phi 8$	KQB2T08-00	13.7	20.1	31.1	7	16.1	4.2	8	25.6	24.4
$\phi 10$	KQB2T10-00	16.6	22	34	8	17	4.2	8	40	36.8
$\phi 12$	KQB2T12-00	18.7	24.6	37.7	9.1	18.6	4.2	8	57.4	47
$\phi 16$	KQB2T16-00	24.6	28.8	43.4	10.6	20.8	4.2	8	100	75.5

Note 1) For the $\phi 16$, this dimension refers to the O.D. of the release button.

Note 2) Value of FEP tubing.

Value of nylon tubing for $\phi 16$ only.



Union "Y": KQB2U




Applicable tubing O.D. (mm)	Model	Note 1) ϕD	W	L1	L2	P	M	ϕN	ϕO	Note 2) Effective area (mm ²)	Weight (g)
$\phi 3.2$	KQB2U23-00	8.3	16.4	29	11	8.1	12	3.2	5.6	3.4	9.2
$\phi 4$	KQB2U04-00	9.1	18.2	30.4	11.3	9.1	12.6	3.2	5.6	4.2	11.1
$\phi 6$	KQB2U06-00	11.4	22.9	34.9	12.2	11.5	13.6	3.2	5.6	13.4	18.8
$\phi 8$	KQB2U08-00	13.7	28.3	40.1	14.1	14.6	16.1	4.2	8	25.6	29.7
$\phi 10$	KQB2U10-00	16.6	34.2	44	14.4	17.6	17	4.2	8	40	47.4
$\phi 12$	KQB2U12-00	18.7	38.5	48.4	15.8	19.8	18.6	4.2	8	57.4	62.1
$\phi 16$	KQB2U16-00	24.6	49.3	56.6	17.3	26	20.8	4.2	8	113	110.2

Note 1) For the $\phi 16$, this dimension refers to the O.D. of the release button.

Note 2) Value of FEP tubing.

Value of nylon tubing for $\phi 16$ only.



- KQ2
- KQB2**
- KS
- KX
- KM
- KF
- M
- H/DL
- L/LL
- KC
- KK
- KK130
- DM
- KDM
- KB
- KR
- KA
- KQG2
- KG
- KFG2
- MS
- KKA
- KP
- LQ
- MQR
- T
- IDK

KQB2 Series

Applicable Tubing: Metric Size, Connection Thread: M, R, Rc


Dimensions

Different Diameter Tee: KQB2T



Applicable tubing O.D. (mm)		Model	Note 1) ϕ D		L ₁	L ₂	L ₃	Q	M ₁	M ₂	ϕ N	ϕ O	Note 2) Effective area (mm ²)	Weight (g)
a	b		ϕ D ₁	ϕ D ₂										
ϕ 3.2	ϕ 4	KQB2T23-04	9.1	8.3	14.2	14.1	21.1	4.1	12.6	12	3.2	5.6	3.8	8.5
ϕ 4	ϕ 6	KQB2T04-06	11.4	9.1	15.6	15.7	22.8	4.4	13.6	12.6	3.2	5.6	7.1	11
ϕ 6	ϕ 8	KQB2T06-08	13.7	11.4	19.1	17.7	29.5	6.4	16.1	13.6	4.2	8	16.4	20
ϕ 8	ϕ 10	KQB2T08-10	16.6	13.7	21	21.2	32.1	7.1	17	16.1	4.2	8	36	29.8
ϕ 10	ϕ 12	KQB2T10-12	18.7	16.6	23.6	23.1	35.7	8.1	18.6	17	4.2	8	56	41.3
ϕ 12	ϕ 16	KQB2T12-16	24.6	18.7	26.8	26.7	39.9	9.1	20.8	18.6	4.2	8	108.5	58

Note 1) For the ϕ 16, this dimension refers to the O.D. of the release button.
Note 2) Value of FEP tubing.




Plug-in Reducer: KQB2R



Applicable tubing O.D. (mm)	Applicable fitting size ϕ d	Model	ϕ D	L	A	M	Note 2) Effective area (mm ²)	Weight (g)
ϕ 3.2	ϕ 4	KQB2R23-04	9	32.9	20.3	12	3.4	4.9
ϕ 4	ϕ 6	KQB2R04-06	9	34.4	20.8	12.6	5.6	7
ϕ 6	ϕ 8	KQB2R06-08	12	38.4	22.3	13.6	13.1	12.7
ϕ 8	ϕ 10	KQB2R08-10	14	41.9	24.9	16.1	26.1	19.2
ϕ 10	ϕ 12	KQB2R10-12	17	44.8	26.2	17	41.5	27.8
ϕ 12	ϕ 16	KQB2R12-16	19	42.9	22.1	18.6	58.3	37.2

Note) Value of FEP tubing.




Different Diameter Straight: KQB2H



Applicable tubing O.D. (mm)		Model	ϕ D Note 1)	L	M ₁	M ₂	Note 2) Effective area (mm ²)	Weight (g)
a	b							
ϕ 3.2	ϕ 4	KQB2H23-04	9	25.6	12	12.6	3.4	6.8
ϕ 4	ϕ 6	KQB2H04-06	12	27.2	12.6	13.6	5.6	12.1
ϕ 6	ϕ 8	KQB2H06-08	14	30.7	13.6	16.1	13.1	17.1
ϕ 8	ϕ 10	KQB2H08-10	17	34.1	16.1	17	26.1	27.2
ϕ 10	ϕ 12	KQB2H10-12	19	36.6	17	18.6	41.5	34.8
ϕ 12	ϕ 16	KQB2H12-16	24.6	40.4	18.6	20.8	58.3	57.3

Note 1) For the ϕ 16, this dimension refers to the O.D. of the release button.
Note 2) Value of FEP tubing.




Different Diameter Union "Y": KQB2U



Applicable tubing O.D. (mm)		Model	Note 1) ϕ D		L ₁	L ₂	P	W	M ₁	M ₂	ϕ N	ϕ O	Note 2) Effective area (mm ²)	Weight (g)
a	b		ϕ D ₁	ϕ D ₂										
ϕ 3.2	ϕ 4	KQB2U23-04	9.1	27	10.8	8.1	16.4	12	12.6	3.2	5.6	3.2	8.5	
ϕ 4	ϕ 6	KQB2U04-06	11.4	29.3	11.2	9.1	18.2	12.6	13.6	3.2	5.6	4.2	11.9	
ϕ 6	ϕ 8	KQB2U06-08	13.7	33.7	12.2	11.5	22.9	13.6	16.1	4.2	8	13.4	19.3	
ϕ 8	ϕ 10	KQB2U08-10	16.6	38.3	13.8	14.6	28.3	16.1	17	4.2	8	25.6	32	
ϕ 10	ϕ 12	KQB2U10-12	18.7	43	14	17.6	34.2	17	18.6	4.2	8	40	47.6	
ϕ 12	ϕ 16	KQB2U12-16	24.6	47.4	15.6	19.8	38.5	18.6	20.8	4.2	8	57.4	67.6	

Note 1) For the ϕ 16, this dimension refers to the O.D. of the release button.
Note 2) Value of FEP tubing.



Metal One-touch Fittings **KQB2 Series**

Applicable Tubing: Metric Size, Connection Thread: M, R, Rc


Dimensions

Bulkhead Connector: KQB2E



Applicable tubing O.D. (mm)	Connection thread Rc	Model	T (M)	Width across flat		L1	L2	Mounting hole	M	Note) Effective area (mm ²)	Weight (g)
				H1	H2						
ø3.2	1/4	KQB2E23-02	M10 x 1	17	12	31	14.8	11	12	3.4	27.5
	1/8	KQB2E04-01		14		25.8	9.7				16.9
ø4	1/4	KQB2E04-02	M10 x 1	17	12	30.9	14.8	11	12.6	5.6	27.1
	1/8	KQB2E06-01				24.2	6.1				25
ø6	1/4	KQB2E06-02	M14 x 1	17	17	31.6	13.5	15	13.6	13.1	33.2
	3/8	KQB2E06-03		19		33	14.9				34.8
ø8	1/8	KQB2E08-01				26.3	6.9				28.7
	1/4	KQB2E08-02	M15 x 1	17	19	32.4	13	16	16.1	26.1	34.2
	3/8	KQB2E08-03		19		34	14.6				35.9
ø10	1/4	KQB2E10-02	M18 x 1	19	21	31.6	11.6	19	17	41.5	44
	3/8	KQB2E10-03				33.6	13.6				40.2
ø12	3/8	KQB2E12-03	M20 x 1	21	24	34	12.8	21	18.6	58.3	52
	1/2	KQB2E12-04		24		39.6	18.4				62.5
ø16	3/8	KQB2E16-03	M27 x 1	29	30	35.3	11.2	28	20.8	96	111
	1/2	KQB2E16-04				40.6	16.5			113	118.2

Note) Value of FEP tubing.
Value of nylon tubing for ø16 only.




Extended Male Elbow: KQB2W



Applicable tubing O.D. (mm)	Connection thread R, M	Model	H (Width across flat)	Note 1) øD	L1	L2	A*	M	Note 2) Effective area (mm ²)	Weight (g)
ø3.2	M5 x 0.8	KQB2W23-M5	8		13.1	31.2	32.4			13.5
	1/8	KQB2W23-01S	10	8.3		31.3	32.3	12	2.8	15.3
	1/4	KQB2W23-02S	14		13.6	35.1	34.5			34.7
ø4	M5 x 0.8	KQB2W04-M5	8		13.7	31.6	33.2		3	14.1
	1/8	KQB2W04-01S	10	9.1		31.7	33.1	12.6	4	16.2
	1/4	KQB2W04-02S	14		14.4	35.5	35.3			35.6
ø6	M5 x 0.8	KQB2W06-M5	8		14.7	32.7	35.4		3	16
	1/8	KQB2W06-01S	10	11.4		32.8		13.6	10.9	17.8
	1/4	KQB2W06-02S	14		15.9	36.6	37.6			37.2
ø8	3/8	KQB2W06-03S	17		38	38.6				60.3
	1/8	KQB2W08-01S	12		18.6	37	40.7	16.1	20.5	28.9
	1/4	KQB2W08-02S	14	13.7		40.2	42.3			39.2
ø10	3/8	KQB2W08-03S	17		19.1	41.6	43.3			63.7
	1/4	KQB2W10-02S	14			46.6	50.2	17	33.5	42.1
	3/8	KQB2W10-03S	17	16.6	21	45.9	49.1			64.5
ø12	1/2	KQB2W10-04S	22			50.1	52			123
	1/4	KQB2W12-02S	14		22.6	47.7	52.3	18.6	47.7	46
	3/8	KQB2W12-03S	17	18.7		49	53.2			58.2
ø16	1/2	KQB2W12-04S	22		23.6	53.2	56.1			118
	3/8	KQB2W16-03S	19	24.6	26.3	57.6	64.1	20.8	71	89.6
	1/2	KQB2W16-04S	22		27.3	61.4	66.6		100	116

* Reference dimensions after installation for R thread
Note 1) For the ø16, this dimension refers to the O.D. of the release button.
Note 2) Value of FEP tubing.
Value of nylon tubing for ø16 only.

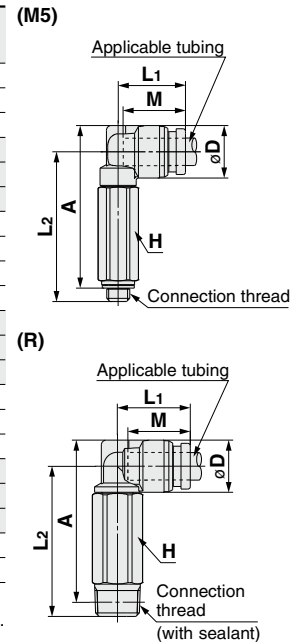

- KQ2
- KQB2**
- KS
- KX
- KM
- KF
- M
- H/DL
- L/LL
- KC
- KK
- KK130
- DM
- KDM
- KB
- KR
- KA
- KQG2
- KG
- KFG2
- MS
- KKA
- KP
- LQ
- MQR
- T
- IDK

KQB2 Series

Applicable Tubing: Metric Size, Connection Thread: M, R, Rc

Dimensions

Female Connector: KQB2F




Applicable tubing O.D. (mm)	Connection thread Rc	Model	H (Width across flat)	Note 1) ϕD	L1	L2	M	Note 2) Effective area (mm ²)	Weight (g)
$\phi 3.2$	1/8	KQB2F23-01	12	8	23.3	9.8	12	3.4	9.3
	1/8	KQB2F04-01	12	8.7	23.7	9.8	12.6	5.6	9.7
$\phi 4$	1/4	KQB2F04-02	17		28.7	13.2			
	$\phi 6$	1/8	KQB2F06-01	12	11.1	24.2	10	13.6	13.1
1/4		KQB2F06-02	17	29.2		13.4	24.3		
3/8		KQB2F06-03	19	30.6		14.2	25.8		
$\phi 8$	1/8	KQB2F08-01	14	13.4	26.3	9.6	16.1	26.1	17.1
	1/4	KQB2F08-02	17		31.3	13.7			26.8
	3/8	KQB2F08-03	19		32.7	14.4			28.4
$\phi 10$	1/4	KQB2F10-02	17	16.4	31.6	13.9	17	41.5	30.3
	3/8	KQB2F10-03	19		33	14.7			32
$\phi 12$	1/4	KQB2F12-02	19	18.5	32.6	13.3	18.6	58.3	39.4
	3/8	KQB2F12-03			34	14.7			33.9
	1/2	KQB2F12-04			24	39.3			18.4
$\phi 16$	3/8	KQB2F16-03	24	24.6	35.3	13.5	20.8	81	62.8
	1/2	KQB2F16-04			40.6	18.8			113

Note 1) For the $\phi 10$, $\phi 12$, and $\phi 16$, this dimension refers to the O.D. of the release button.

Note 2) Value of FEP tubing.


Value of nylon tubing for $\phi 16$ only.



Plug: KQB2P



Applicable fitting size ϕd	Model	ϕD	L	A	Weight (g)
$\phi 3.2$	KQB2P-23	5	28.9	16.9	2.8
$\phi 4$	KQB2P-04	6	29.6	17	4.3
$\phi 6$	KQB2P-06	8	30.8	17.2	9
$\phi 8$	KQB2P-08	10	33.7	17.6	16.3
$\phi 10$	KQB2P-10	12	34.6	17.6	25.4
$\phi 12$	KQB2P-12	14	36.5	17.9	37.8
$\phi 16$	KQB2P-16	18	38.6	17.8	69.2



Related Equipment

Spatter cover

(Applicable tubing: FR soft nylon, FR double layer, FR three-layer)



Applicable tubing O.D. (mm)	Model
$\phi 6$	KQB2-06C-X1124
$\phi 8$	KQB2-08C-X1124
$\phi 10$	KQB2-10C-X1124

* Since the spatter cover is designed for multi-layer (double layer, three-layer) tubing, sufficient effects cannot be obtained in foreign matter flow-in or followability for singlelayer tubing.

* The cover can be attached regardless of the single-layer/multi-layer tubing.

* Cannot be used for union "Y" (KQB2U) 2-port side.



KQB2 Series

Specific Product Precautions

Be sure to read this before handling the products.

Refer to back page 50 for Safety Instructions and pages 13 to 17 for Fittings and Tubing Precautions.

Selection

⚠ Caution

1. The surge pressure must be under the maximum operating pressure. If the surge pressure exceeds the maximum operating pressure, it will result in damage to fittings and tubing or the tubing may result in being fallen out.
2. If using a fluororesin tubing in an environment where the fluid temperature changes drastically, it is recommended to use an inner sleeve. Otherwise, air leakage may occur or the tube may release from fitting due to deformation of the tubing.
3. The particle generation of the KQB2 series depends on the operating conditions and operating environment. If you are concerned about the effects on machinery and equipment, check the particle generation with your machine before use.


The components of the KQB2 series may slide due to changes in the internal pressure, which may generate particles. When using male elbow, male branch tee, and extended male elbow fittings, particles may be generated by rotation for positioning after connecting.

Mounting

⚠ Caution

1. When performing the piping work, turn the tightening tool in the horizontal direction to the hex. across flats of the stud so that any moment is not applied to the body.

If the tool is in contact with the body, this may cause the stud to come off.



2. The union elbow, union tee, union "Y", different diameter tee and different diameter union "Y" should be fixed through the mounting hole.

Otherwise, air leakage or breaking can occur due to a pulling force or moment load created by the product's weight.

3. The elbow union, branch tee, and long elbow union can be turned for positioning after connecting, but they cannot be used while turning them.

Doing so may cause worn out metallic particles to enter the fluid or the fitting to break.

4. If the connection tube oscillates or turns, do not use this product.

Doing so may cause the fitting to break. In particular, for the product with the stud, this may cause the stud to come off.

Installation and Removal of Tubing

⚠ Caution

1. Installation of tubing

- 1) Grease is not used for the KQB2 series, therefore a greater insertion force is required when the tube is installed. In particular, polyurethane tubing may fold when inserted due to its softness. Hold the end of the tubing, and insert it all the way in slowly and securely. Refer to dimension "M" in the dimension drawings for guidance on the insertion depth of tubing.

2. Removal of tubing

- 1) For tubing used at a high temperature or for an extended period of time, there is a possibility that it will not fit into a One-touch fitting again due to an enlarged O.D. Dispose of the tubing and replace it with a new one.

Proper Tightening Torque of Fittings

⚠ Caution

1. Tighten fittings with sealant using the proper tightening torques in the table below. As a rule, they should be tightened 2 to 3 turns with a tool after first tightening by hand.

If tightened using a torque exceeding the proper torque level, this may cause the fitting to break.

In particular, for the product with the stud, the stud may come off.

R thread/NPT thread Proper tightening torque

Connection thread size	Proper tightening torque N·m
NPT, R1/8	3 to 5
NPT, R1/4	8 to 12
NPT, R3/8	15 to 20
NPT, R1/2	20 to 25

G thread Proper tightening torque

Connection thread size	Proper tightening torque N·m
G1/8	2.9 to 3.2
G1/4	5.7 to 6.3
G3/8	9.5 to 10.5
G1/2	14.3 to 15.8

KQ2

KQB2

KS
KX

KM

KF

M

H/DL
L/LL

KC

KK

KK130

DM

KDM

KB

KR

KA

KQG2

KG

KFG2

MS

KKA

KP

LQ

MQR

T

IDK