

Always with our customers
WORLD LEADER IN CONTROL & MEASUREMENT

www.hynux.com



MR series Control switch

LED Control switch



HANYOUNG nux

MR series Control switch


- Snap-action contact unit
- Bright and durable due to use of LED light
- Aluminum guard / Plastic guard
- Assembling type (actuator and contact part)

Flush aluminum guard (MR□ - A)



Ø30

Flush aluminum guard (MR□ - N)

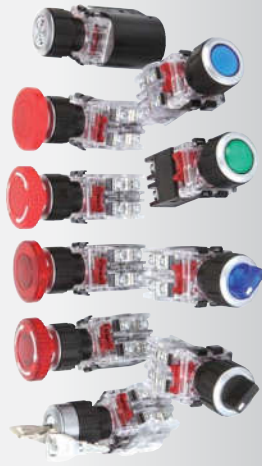

Ø25

Flush plastic guard (MR□ - K)



Ø25

Best Switch
MR
series
Control switch

Extended aluminum guard (MR□ - R)



Ø22

Extended plastic guard (MR□ - T)




Ø22

Products composition

Flush : Ø25, Ø30 / Extended : Ø22

MR series

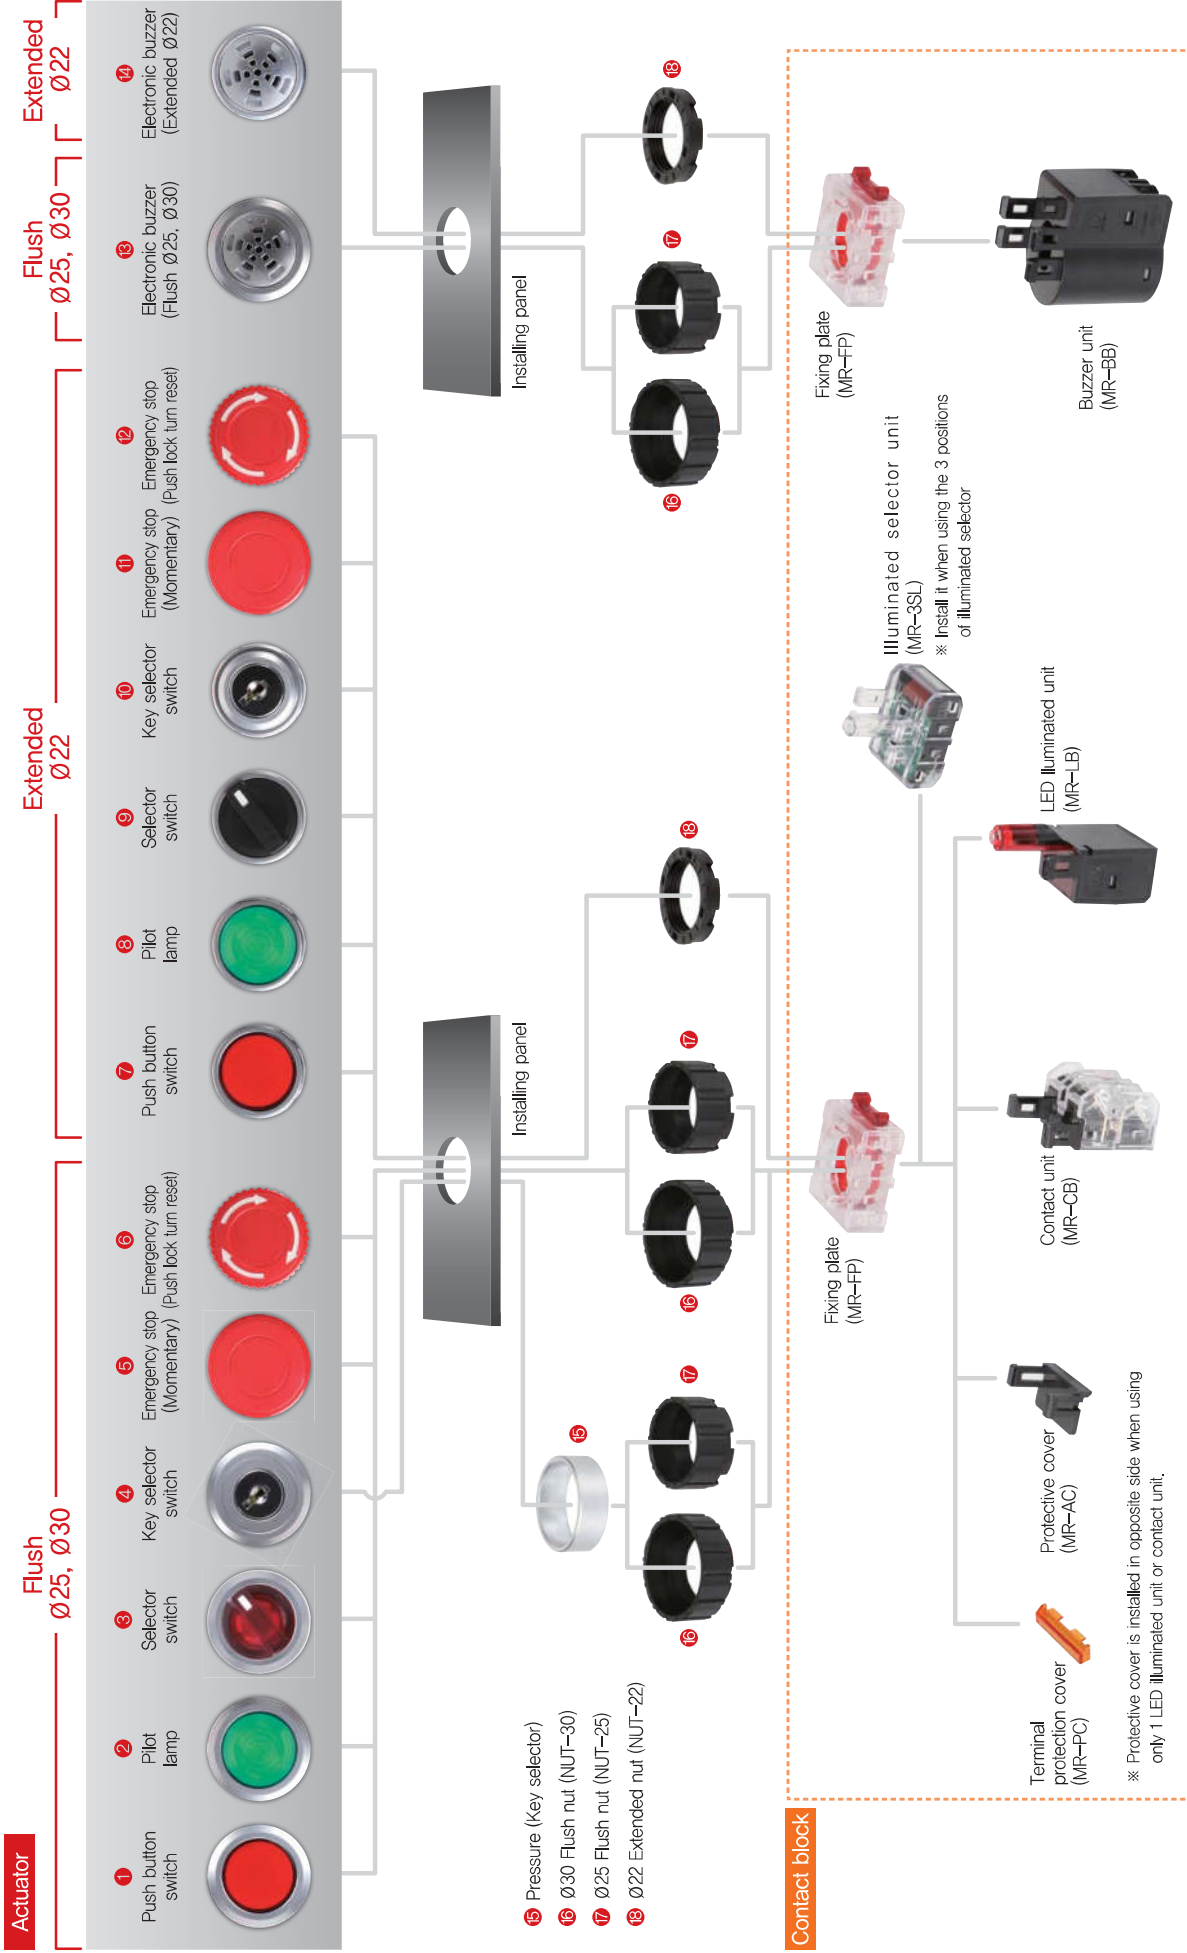

CONTENTS

Aluminum guard Flush(Ø25,Ø30), Extended(Ø22)

Push button switch	6
Illuminated push button switch	6
Pilot light	7
Selector switch	7
Illuminated selector switch	8
Key selector switch	9
Emergency stop switch	10
Illuminated emergency stop switch	11
Electronic buzzer	12

Plastic guard Flush(Ø25), Extended(Ø22)

Push button switch	14
Illuminated push button switch	14
Pilot light	15
Selector switch	15
Illuminated selector switch	16
Emergency stop switch	17
Illuminated emergency stop switch	18
Electronic buzzer	19

Products specification

Suffix code	20
Specification	20
Actuator panel installation sample	20
Panel cutout	20
Contact part composition	21
Selector / Key selector contact operation	21
Accessories	21

MR SERIES

Aluminum guard

Flush($\varnothing 25, \varnothing 30$), Extended($\varnothing 22$)



PUSH BUTTON SWITCH

Aluminum guard



Model	Code	Description
MRF-	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	Push button switch
Actuator	A	Flush (Installing hole: Ø30)
	N	Flush (Installing hole: Ø25)
	R	Extended (Installing hole: Ø22)
Operation function	M	Momentary
	A	Alternate
Contact composition	1	1a1b
	2	2a2b
Cap (LED color)	R	R(Red), G(Green), Y(Yellow), A(Blue), W(White)

MRF-A Flush (Ø30)



MRF-N Flush (Ø25)



MRF-R Extended (Ø22)



ILLUMINATED PUSH BUTTON SWITCH

Aluminum guard



Model	Code	Description
MRX-	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	Illuminated push button switch
Actuator	A	Flush (Installing hole: Ø30)
	N	Flush (Installing hole: Ø25)
	R	Extended (Installing hole: Ø22)
Operation function	M	Momentary
	A	Alternate
Contact composition	1	1a1b
	2	2a2b
Rated input voltage	A0	100 – 240 V AC
	A3	380 V AC
	D0	12 – 24 V DC/AC
Cap (LED color)	R	R(Red), G(Green), Y(Yellow), A(Blue), W(White)

MRX-A Flush (Ø30)



MRX-N Flush (Ø25)



MRX-R Extended (Ø22)

