


Part Number Example



Part number includes the width code prefix in parenthesis below. For example, a 4mm wide S2M-86 is part number 40-S2M-86.

STS2M for 4mm, 6mm and 10mm Wide Belts

Synchro-Link® STS Timing Belts - Neoprene (Metric)

Part Number	4mm Wide (40)	6mm Wide (60)	10mm Wide (100)	Pitch Length (mm)	Number of Teeth
	Weight*	Weight*	Weight*		
S2M-86	0.001	0.001	0.002	86	43
S2M-88	0.001	0.001	0.002	88	44
S2M-90	0.001	0.001	0.002	90	45
S2M-92	0.001	0.001	0.002	92	46
S2M-98	0.001	0.001	0.002	98	49
S2M-100	0.001	0.001	0.002	100	50
S2M-102	0.001	0.001	0.002	102	51
S2M-108	0.001	0.001	0.002	108	54
S2M-112	0.001	0.001	0.002	112	56
S2M-114	0.001	0.001	0.002	114	57
S2M-116	0.001	0.001	0.002	116	58
S2M-118	0.001	0.001	0.002	118	59
S2M-120	0.001	0.001	0.002	120	60
S2M-122	0.001	0.001	0.002	122	61
S2M-124	0.001	0.001	0.002	124	62
S2M-126	0.001	0.002	0.003	126	63
S2M-128	0.001	0.002	0.003	128	64
S2M-130	0.001	0.002	0.003	130	65
S2M-132	0.001	0.002	0.003	132	66
S2M-134	0.001	0.002	0.003	134	67
S2M-138	0.001	0.002	0.003	138	69
S2M-140	0.001	0.002	0.003	140	70
S2M-142	0.001	0.002	0.003	142	71
S2M-144	0.001	0.002	0.003	144	72
S2M-148	0.001	0.002	0.003	148	74
S2M-150	0.001	0.002	0.003	150	75
S2M-152	0.001	0.002	0.003	152	76
S2M-158	0.001	0.002	0.003	158	79
S2M-160	0.001	0.002	0.003	160	80
S2M-162	0.001	0.002	0.003	162	81
S2M-164	0.001	0.002	0.003	164	82
S2M-166	0.001	0.002	0.003	166	83
S2M-168	0.001	0.002	0.003	168	84
S2M-170	0.001	0.002	0.003	170	85
S2M-172	0.001	0.002	0.003	172	86
S2M-174	0.001	0.002	0.003	174	87
S2M-176	0.001	0.002	0.003	176	88
S2M-180	0.001	0.002	0.004	180	90
S2M-184	0.001	0.002	0.004	184	92
S2M-186	0.001	0.002	0.004	186	93
S2M-190	0.002	0.002	0.004	190	95
S2M-192	0.002	0.002	0.004	192	96
S2M-198	0.002	0.002	0.004	198	99
S2M-200	0.002	0.002	0.004	200	100
S2M-202	0.002	0.002	0.004	202	101
S2M-204	0.002	0.002	0.004	204	102
S2M-210	0.002	0.003	0.004	210	105
S2M-212	0.002	0.003	0.004	212	106

* Weights shown are approximate.

Other widths available. Contact BANDO for price and delivery.



STS2M for 4mm, 6mm and 10mm Wide Belts (Continued)

Part Number	4mm Wide (40)	6mm Wide (60)	10mm Wide (100)	Pitch Length (mm)	Number of Teeth
	Weight*	Weight*	Weight*		
S2M-214	0.002	0.003	0.004	214	107
S2M-216	0.002	0.003	0.004	216	108
S2M-220	0.002	0.003	0.004	220	110
S2M-222	0.002	0.003	0.004	222	111
S2M-224	0.002	0.003	0.004	224	112
S2M-230	0.002	0.003	0.005	230	115
S2M-234	0.002	0.003	0.005	234	117
S2M-236	0.002	0.003	0.005	236	118
S2M-240	0.002	0.003	0.005	240	120
S2M-242	0.002	0.003	0.005	242	121
S2M-244	0.002	0.003	0.005	244	122
S2M-248	0.002	0.003	0.005	248	124
S2M-250	0.002	0.003	0.005	250	125
S2M-254	0.002	0.003	0.005	254	127
S2M-256	0.002	0.003	0.005	256	128
S2M-260	0.002	0.003	0.005	260	130
S2M-262	0.002	0.003	0.005	262	131
S2M-266	0.002	0.003	0.005	266	133
S2M-272	0.002	0.003	0.005	272	136
S2M-274	0.002	0.003	0.005	274	137
S2M-280	0.002	0.003	0.006	280	140
S2M-284	0.002	0.003	0.006	284	142
S2M-288	0.002	0.003	0.006	288	144
S2M-290	0.002	0.003	0.006	290	145
S2M-292	0.002	0.003	0.006	292	146
S2M-296	0.002	0.004	0.006	296	148
S2M-300	0.002	0.004	0.006	300	150
S2M-308	0.002	0.004	0.006	308	154
S2M-310	0.002	0.004	0.006	310	155
S2M-312	0.002	0.004	0.006	312	156
S2M-314	0.002	0.004	0.006	314	157
S2M-316	0.003	0.004	0.006	316	158
S2M-320	0.003	0.004	0.006	320	160
S2M-322	0.003	0.004	0.006	322	161
S2M-324	0.003	0.004	0.006	324	162
S2M-328	0.003	0.004	0.007	328	164
S2M-330	0.003	0.004	0.007	330	165
S2M-332	0.003	0.004	0.007	332	166
S2M-340	0.003	0.004	0.007	340	170
S2M-342	0.003	0.004	0.007	342	171
S2M-344	0.003	0.004	0.007	344	172
S2M-350	0.003	0.004	0.007	350	175
S2M-364	0.003	0.004	0.007	364	182
S2M-370	0.003	0.004	0.007	370	185
S2M-372	0.003	0.004	0.007	372	186
S2M-376	0.003	0.004	0.007	376	188
S2M-380	0.003	0.005	0.008	380	190
S2M-386	0.003	0.005	0.008	386	193
S2M-396	0.003	0.005	0.008	396	198
S2M-400	0.003	0.005	0.008	400	200
S2M-406	0.003	0.005	0.008	406	203
S2M-408	0.003	0.005	0.008	408	204
S2M-416	0.003	0.005	0.008	416	208
S2M-420	0.003	0.005	0.008	420	210
S2M-426	0.003	0.005	0.008	426	213
S2M-438	0.003	0.005	0.009	438	219
S2M-448	0.004	0.005	0.009	448	224
S2M-452	0.004	0.005	0.009	452	226
S2M-454	0.004	0.005	0.009	454	227
S2M-460	0.004	0.005	0.009	460	230
S2M-468	0.004	0.006	0.009	468	234
S2M-474	0.004	0.006	0.009	474	237
S2M-486	0.004	0.006	0.010	486	243
S2M-490	0.004	0.006	0.010	490	245
S2M-494	0.004	0.006	0.010	494	247
S2M-500	0.004	0.006	0.010	500	250
S2M-520	0.004	0.006	0.010	520	260
S2M-530	0.004	0.006	0.011	530	265
S2M-540	0.004	0.006	0.011	540	270
S2M-550	0.004	0.007	0.011	550	275

Synchro-Link® STS Timing Belts - Neoprene (Metric)

* Weights shown are approximate.

Other widths available. Contact BANDO for price and delivery.



STS2M for 4mm, 6mm and 10mm Wide Belts (Continued)

Part Number	4mm Wide (40)	6mm Wide (60)	10mm Wide (100)	Pitch Length (mm)	Number of Teeth
	Weight*	Weight*	Weight*		
S2M-558	0.004	0.007	0.011	558	279
S2M-560	0.004	0.007	0.011	560	280
S2M-572	0.005	0.007	0.011	572	286
S2M-594	0.005	0.007	0.012	594	297
S2M-596	0.005	0.007	0.012	596	298
S2M-600	0.005	0.007	0.012	600	300
S2M-620	0.005	0.007	0.012	620	310
S2M-630	0.005	0.008	0.013	630	315
S2M-650	0.005	0.008	0.013	650	325
S2M-652	0.005	0.008	0.013	652	326
S2M-656	0.005	0.008	0.013	656	328
S2M-668	0.005	0.008	0.013	668	334
S2M-676	0.005	0.008	0.013	676	338
S2M-700	0.006	0.008	0.014	700	350
S2M-710	0.006	0.008	0.014	710	355
S2M-742	0.006	0.009	0.015	742	371
S2M-752	0.006	0.009	0.015	752	376
S2M-754	0.006	0.009	0.015	754	377
S2M-766	0.006	0.009	0.015	766	383
S2M-796	0.006	0.009	0.016	796	398
S2M-800	0.006	0.010	0.016	800	400
S2M-810	0.006	0.010	0.016	810	405
S2M-898	0.007	0.011	0.018	898	449
S2M-900	0.007	0.011	0.018	900	450
S2M-940	0.007	0.011	0.019	940	470
S2M-946	0.008	0.011	0.019	946	473
S2M-950	0.008	0.011	0.019	950	475
S2M-984	0.008	0.012	0.020	984	492
S2M-1000	0.008	0.012	0.020	1000	500
S2M-1032	0.008	0.012	0.021	1032	516
S2M-1036	0.008	0.012	0.021	1036	518
S2M-1066	0.008	0.013	0.021	1066	533
S2M-1074	0.009	0.013	0.021	1074	537
S2M-1100	0.009	0.013	0.022	1100	550
S2M-1110	0.009	0.013	0.022	1110	555
S2M-1136	0.009	0.014	0.023	1136	568
S2M-1154	0.009	0.014	0.023	1154	577
S2M-1166	0.009	0.014	0.023	1166	583
S2M-1224	0.010	0.015	0.024	1224	612
S2M-1228	0.010	0.015	0.024	1228	614




Synchro-Link® STS Timing Belts - Neoprene (Metric)

* Weights shown are approximate.

Other widths available. Contact BANDO for price and delivery.

NOTE

S2M Synchro-Link® STS size available in *polyurethane* construction for specialty applications. Consult BANDO for price and availability.

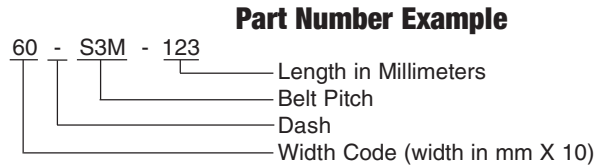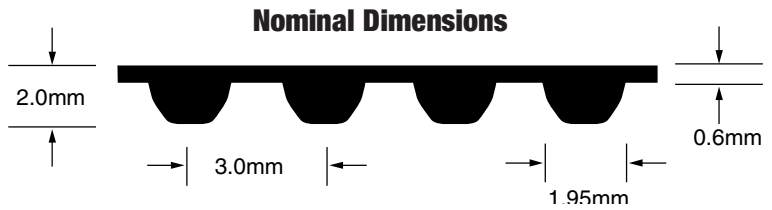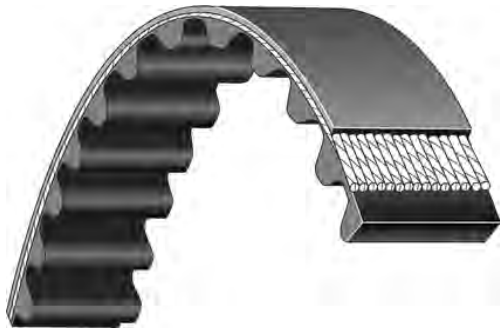

Part number includes the width code prefix in parenthesis below. For example, a 6mm wide S3M-123 is part number 60-S3M-123.

STS3M for 6mm, 10mm and 15mm Wide Belts

Part Number	6mm Wide (60)	10mm Wide (100)	15mm Wide (150)	Pitch Length (mm)	Number of Teeth
	Weight*	Weight*	Weight*		
S3M-123	0.003	0.004	0.006	123	41
S3M-129	0.003	0.005	0.007	129	43
S3M-144	0.003	0.005	0.008	144	48
S3M-150	0.003	0.005	0.008	150	50
S3M-156	0.003	0.005	0.008	156	52
S3M-159	0.003	0.006	0.008	159	53
S3M-162	0.003	0.006	0.008	162	54
S3M-168	0.004	0.006	0.009	168	56
S3M-171	0.004	0.006	0.009	171	57
S3M-174	0.004	0.006	0.009	174	58
S3M-177	0.004	0.006	0.009	177	59
S3M-180	0.004	0.006	0.009	180	60
S3M-186	0.004	0.006	0.010	186	62
S3M-189	0.004	0.007	0.010	189	63
S3M-192	0.004	0.007	0.010	192	64
S3M-198	0.004	0.007	0.010	198	66
S3M-201	0.004	0.007	0.011	201	67
S3M-204	0.004	0.007	0.011	204	68
S3M-207	0.004	0.007	0.011	207	69
S3M-210	0.004	0.007	0.011	210	70
S3M-213	0.004	0.007	0.011	213	71
S3M-219	0.005	0.008	0.011	219	73
S3M-222	0.005	0.008	0.012	222	74
S3M-225	0.005	0.008	0.012	225	75
S3M-228	0.005	0.008	0.012	228	76
S3M-234	0.005	0.008	0.012	234	78
S3M-237	0.005	0.008	0.012	237	79
S3M-240	0.005	0.008	0.013	240	80
S3M-243	0.005	0.008	0.013	243	81
S3M-246	0.005	0.009	0.013	246	82
S3M-249	0.005	0.009	0.013	249	83
S3M-252	0.005	0.009	0.013	252	84
S3M-255	0.005	0.009	0.013	255	85
S3M-258	0.005	0.009	0.014	258	86
S3M-264	0.006	0.009	0.014	264	88
S3M-267	0.006	0.009	0.014	267	89
S3M-270	0.006	0.009	0.014	270	90
S3M-273	0.006	0.010	0.014	273	91
S3M-276	0.006	0.010	0.014	276	92
S3M-279	0.006	0.010	0.015	279	93
S3M-285	0.006	0.010	0.015	285	95
S3M-288	0.006	0.010	0.015	288	96
S3M-291	0.006	0.010	0.015	291	97
S3M-297	0.006	0.010	0.016	297	99
S3M-300	0.006	0.010	0.016	300	100

Synchro-Link® STS Timing Belts - Neoprene (Metric)

* Weights shown are approximate.

Other widths available. Contact BANDO for price and delivery.



STS3M for 6mm, 10mm and 15mm Wide Belts (Continued)

Part Number	6mm Wide (60)	10mm Wide (100)	15mm Wide (150)	Pitch Length (mm)	Number of Teeth
	Weight*	Weight*	Weight*		
S3M-303	0.006	0.011	0.016	303	101
S3M-309	0.006	0.011	0.016	309	103
S3M-312	0.007	0.011	0.016	312	104
S3M-315	0.007	0.011	0.017	315	105
S3M-318	0.007	0.011	0.017	318	106
S3M-324	0.007	0.011	0.017	324	108
S3M-327	0.007	0.011	0.017	327	109
S3M-330	0.007	0.012	0.017	330	110
S3M-339	0.007	0.012	0.018	339	113
S3M-342	0.007	0.012	0.018	342	114
S3M-351	0.007	0.012	0.018	351	117
S3M-354	0.007	0.012	0.019	354	118
S3M-360	0.008	0.013	0.019	360	120
S3M-363	0.008	0.013	0.019	363	121
S3M-366	0.008	0.013	0.019	366	122
S3M-369	0.008	0.013	0.019	369	123
S3M-372	0.008	0.013	0.019	372	124
S3M-375	0.008	0.013	0.020	375	125
S3M-378	0.008	0.013	0.020	378	126
S3M-384	0.008	0.013	0.020	384	128
S3M-387	0.008	0.014	0.020	387	129
S3M-390	0.008	0.014	0.020	390	130
S3M-399	0.008	0.014	0.021	399	133
S3M-402	0.008	0.014	0.021	402	134
S3M-405	0.008	0.014	0.021	405	135
S3M-408	0.009	0.014	0.021	408	136
S3M-417	0.009	0.015	0.022	417	139
S3M-420	0.009	0.015	0.022	420	140
S3M-423	0.009	0.015	0.022	423	141
S3M-426	0.009	0.015	0.022	426	142
S3M-432	0.009	0.015	0.023	432	144
S3M-438	0.009	0.015	0.023	438	146
S3M-444	0.009	0.016	0.023	444	148
S3M-447	0.009	0.016	0.023	447	149
S3M-453	0.009	0.016	0.024	453	151
S3M-459	0.010	0.016	0.024	459	153
S3M-468	0.010	0.016	0.025	468	156
S3M-471	0.010	0.016	0.025	471	157
S3M-480	0.010	0.017	0.025	480	160
S3M-486	0.010	0.017	0.025	486	162
S3M-489	0.010	0.017	0.026	489	163
S3M-492	0.010	0.017	0.026	492	164
S3M-501	0.011	0.018	0.026	501	167
S3M-507	0.011	0.018	0.027	507	169
S3M-516	0.011	0.018	0.027	516	172
S3M-519	0.011	0.018	0.027	519	173
S3M-522	0.011	0.018	0.027	522	174
S3M-525	0.011	0.018	0.028	525	175
S3M-534	0.011	0.019	0.028	534	178
S3M-537	0.011	0.019	0.028	537	179
S3M-540	0.011	0.019	0.028	540	180
S3M-549	0.012	0.019	0.029	549	183
S3M-552	0.012	0.019	0.029	552	184
S3M-555	0.012	0.019	0.029	555	185
S3M-564	0.012	0.020	0.030	564	188
S3M-573	0.012	0.020	0.030	573	191
S3M-579	0.012	0.020	0.030	579	193
S3M-588	0.012	0.021	0.031	588	196
S3M-597	0.013	0.021	0.031	597	199
S3M-600	0.013	0.021	0.031	600	200
S3M-609	0.013	0.021	0.032	609	203
S3M-621	0.013	0.022	0.033	621	207
S3M-633	0.013	0.022	0.033	633	211
S3M-648	0.014	0.023	0.034	648	216
S3M-657	0.014	0.023	0.034	657	219

Synchro-Link® STS Timing Belts - Neoprene (Metric)

* Weights shown are approximate.

Other widths available. Contact BANDO for price and delivery.



STS3M for 6mm, 10mm and 15mm Wide Belts (Continued)

Part Number	6mm Wide (60)	10mm Wide (100)	15mm Wide (150)	Pitch Length (mm)	Number of Teeth
	Weight*	Weight*	Weight*		
S3M-660	0.014	0.023	0.035	660	220
S3M-666	0.014	0.023	0.035	666	222
S3M-681	0.014	0.024	0.036	681	227
S3M-690	0.014	0.024	0.036	690	230
S3M-699	0.015	0.024	0.037	699	233
S3M-726	0.015	0.025	0.038	726	242
S3M-735	0.015	0.026	0.039	735	245
S3M-741	0.016	0.026	0.039	741	247
S3M-750	0.016	0.026	0.039	750	250
S3M-768	0.016	0.027	0.040	768	256
S3M-771	0.016	0.027	0.040	771	257
S3M-789	0.017	0.028	0.041	789	263
S3M-804	0.017	0.028	0.042	804	268
S3M-810	0.017	0.028	0.042	810	270
S3M-825	0.017	0.029	0.043	825	275
S3M-852	0.018	0.030	0.045	852	284
S3M-882	0.018	0.031	0.046	882	294
S3M-885	0.019	0.031	0.046	885	295
S3M-888	0.019	0.031	0.047	888	296
S3M-900	0.019	0.031	0.047	900	300
S3M-918	0.019	0.032	0.048	918	306
S3M-927	0.019	0.032	0.049	927	309
S3M-936	0.020	0.033	0.049	936	312
S3M-990	0.021	0.035	0.052	990	330
S3M-1119	0.023	0.039	0.059	1119	373
S3M-1134	0.024	0.040	0.059	1134	378
S3M-1146	0.024	0.040	0.060	1146	382
S3M-1188	0.025	0.042	0.062	1188	396
S3M-1299	0.027	0.045	0.068	1299	433
S3M-1419	0.030	0.050	0.074	1419	473
S3M-1530	0.032	0.053	0.080	1530	510




* Weights shown are approximate.

Other widths available. Contact BANDO for price and delivery.

Synchro-Link® STS Timing Belts - Neoprene (Metric)

NOTE

S3M Synchro-Link® STS size available in *polyurethane* construction for specialty applications. Consult BANDO for price and availability.

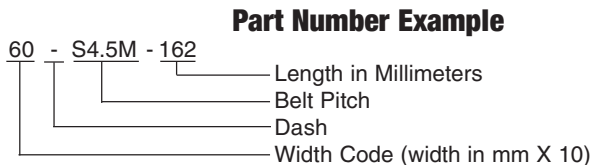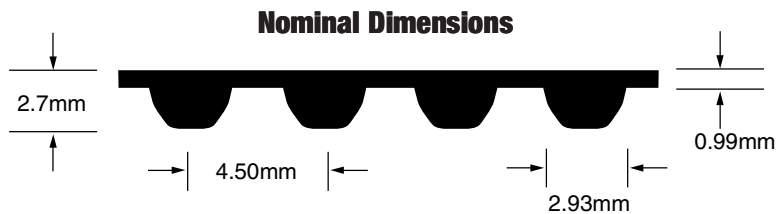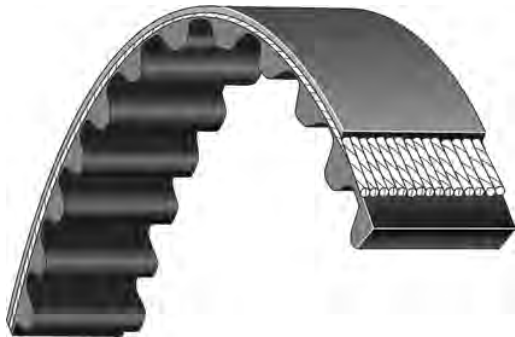

Part number includes the width code prefix in parenthesis below. For example, a 6mm wide S4.5M-162 is part number 60-S4.5M-162.

STS4.5M for 6mm, 10mm and 15mm Wide Belts

Synchro-Link® STS Timing Belts - Neoprene (Metric)

Part Number	6mm Wide (60)	10mm Wide (100)	15mm Wide (150)	Pitch Length (mm)	Number of Teeth
	Weight*	Weight*	Weight*		
S4.5M-162	0.007	0.011	0.017	162	36
S4.5M-180	0.008	0.013	0.019	180	40
S4.5M-198	0.008	0.014	0.021	198	44
S4.5M-225	0.009	0.016	0.024	225	50
S4.5M-239	0.010	0.017	0.025	239	53
S4.5M-252	0.011	0.018	0.026	252	56
S4.5M-279	0.012	0.019	0.029	279	62
S4.5M-284	0.012	0.020	0.030	284	63
S4.5M-315	0.013	0.022	0.033	315	70
S4.5M-324	0.014	0.023	0.034	324	72
S4.5M-351	0.015	0.025	0.037	351	78
S4.5M-383	0.016	0.027	0.040	383	85
S4.5M-396	0.017	0.028	0.042	396	88
S4.5M-450	0.019	0.031	0.047	450	100
S4.5M-491	0.021	0.034	0.051	491	109
S4.5M-504	0.021	0.035	0.053	504	112
S4.5M-518	0.022	0.036	0.054	518	115
S4.5M-558	0.023	0.039	0.058	558	124
S4.5M-563	0.024	0.039	0.059	563	125
S4.5M-612	0.025	0.042	0.063	612	136
S4.5M-630	0.026	0.044	0.066	630	140
S4.5M-711	0.030	0.050	0.075	711	158
S4.5M-729	0.031	0.051	0.076	729	162
S4.5M-801	0.034	0.056	0.084	801	178
S4.5M-1031	0.037	0.061	0.092	1,031	229
S4.5M-2111	0.040	0.066	0.100	2,111	469

* Weights shown are approximate.

Other widths available. Contact BANDO for price and delivery.