





External Dimension

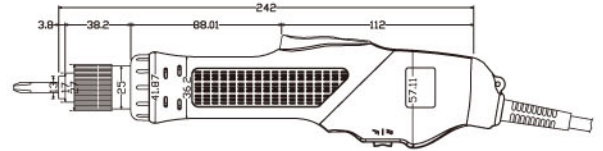


SK-3120L

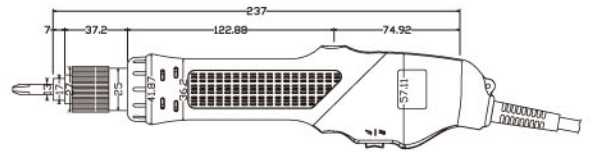

SK-3120P

Torque Range Chart

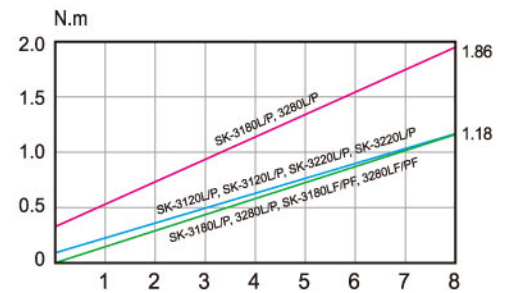

- Extra strong magnet.
 - Fatigue-resistant for long time using, torque accuracy $\pm 3\%$
 - Compact, light-weight, and easy to operate, improve production efficiency.
 - Best fit for laptop and peripherals operation.
 - Torque fixable with a fixing ring (KC-6C)
- ※ Conform to EMI, EMC International Safety Standards.

Specifications

Model		SK-3120L SK-3120P	SK-3180L SK-3180P	SK-3180LF SK-3180PF	SK-3220L SK-3220P	SK-3280L SK-3280P	SK-3280LF SK-3280PF		
Input Voltage		AC110~120V 50/60Hz			AC220~240V 50/60Hz				
Torque	(kgf.cm)	L : 1.5~12 P : 2~12	L/P:3~19	L : 1.5~12 P : 2~12	L : 1.5~12 P : 2~12	L/P:3~19	L : 1.5~12 P : 2~12		
	(Lbf.in)	L : 1.33~10.44 P : 1.77~10.44	L/P:2.57~16.46	L : 1.33~10.44 P : 1.77~10.44	L : 1.33~10.44 P : 1.77~10.44	L/P:2.57~16.46	L : 1.33~10.44 P : 1.77~10.44		
	(N.m)	L : 0.15~1.18 P : 0.2~11.8	L/P:0.29~1.86	L : 0.15~1.18 P : 0.2~11.8	L : 0.15~1.18 P : 0.2~11.8	L/P:0.29~1.86	L : 0.15~1.18 P : 0.2~11.8		
Repeatable Torque Accuracy(%)		±3%							
Torque Adjustment		Stepless							
Free Speed(r.p.m)		1000	1000	2000	1000	1000	2000		
Power Consumption		0.3A	0.3A	0.3A	0.2A	0.2A	0.2A		
Screw Size Dia (mm)	Machine Screw	1.6~3.0	2.6~3.5	2.0~3.0	1.6~3.0	2.6~3.5	2.0~3.0		
	Tapping Screw	1.6~2.6	2.6~3.0	2.0~2.6	1.6~2.6	2.6~3.0	2.0~2.6		
Weight(g)		550			550				
Length(mm)		L/242			P/237				
ESD(Anti-Static)		—							
UL(Anti-Static)		—							
CE		—							
RoHS		✓							
Bit Type									

Accessories

Torque Fixing Ring
KC-6C



Torque Adjuster
KW-3



Suspension Rack
KH-4



Spring Balancer
KL-1200



90° Degree
Attachment
KL-2
(only "L" type)

