


STA35SL

Ø35mm Slim LED Tower Lights



STA35SL

STA35SL Ø35mm Direct Mount LED Steady Tower Lights


- Ø35mm direct mount tower lights
- Excellent visibility by using a high brightness LED with a special diffusion lens
- Lens maintains a semi-transparent color when not emitting the specific color of the signal under operation.
- Steady mode only (can operate flashing mode with external control) with fixed user selected color arrangement
- Easy mounting with the bolts/ screws located at the bottom of the product
- Materials : Lens-AS, Housing-ABS
- Ambient operating temperature : -30°C to +50°C
- Protection rating : IP44

Specifications

Model number	Layer	Voltage	Current	Certificates	Weight	Color
STA35SL Steady	1	AC/DC12V AC/DC24V AC110V AC220V	0.100A 0.050A 0.020A 0.020A	CE DC24V only	0.60kg	● R-Red
	2	AC/DC12V AC/DC24V AC110V AC220V	0.200A 0.100A 0.040A 0.040A		0.85kg	● R-Red ● G-Green
	3	AC/DC12V AC/DC24V AC110V AC220V	0.300A 0.150A 0.060A 0.060A		1.05kg	● R-Red ● A-Amber ● G-Green
	4	AC/DC12V AC/DC24V AC110V AC220V	0.400A 0.200A 0.080A 0.080A		1.30kg	● R-Red ● A-Amber ● G-Green ● B-Blue
	5	AC/DC12V AC/DC24V AC110V AC220V	0.500A 0.250A 0.100A 0.100A		1.53kg	● R-Red ● A-Amber ● G-Green ● B-Blue ● W-White

Technical Diagram (Units : mm)

STA35SL

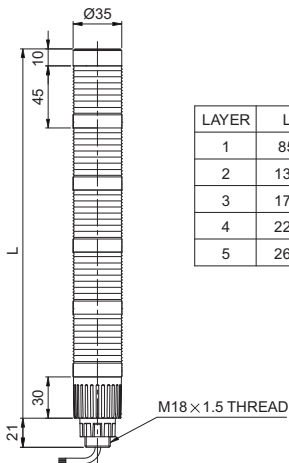

Wiring Instructions

- External power line and signal line standard : UL1007 AWG22(0.3sq) 400mm
- * Please refer to page 258 for detailed wiring instructions.

Customization

- Wall mount bracket options : Used for mounting on the vertical surface



Wall Mount Bracket
STAWB25

Ordering Specification

STA35SL	-	3	-	220	-	RAG
[Model number]		[Layer]		[Voltage]		[Color]
• STA35SL		• 1-1Layer • 2-2Layers • 3-3Layers • 4-4Layers • 5-5Layers		• 12-DC12V • 24-DC12V • 110-AC110V • 220-AC220V		● R-Red ● A-Amber ● G-Green ● B-Blue ● W-White