


STC56ML

Ø56mm Multiple Color LED Steady/Flashing Tower Lights



- STC56ML** LED Steady
- STC56ML-BZ** Built-in Buzzer LED
- STC56MLF** Steady
- STC56MLF-BZ** LED Steady/Flashing
Built-in Buzzer LED Steady/Flashing



STC56ML series



Built-in buzzer output holes formed on the housing of the product.



40mm lens height

Standard height of lens is 70mm. 40mm lens can optionally be provided. (Model number : STC56MEL)


STC56ML Ø56mm Pole Mount, Multiple Color LED Steady/Flashing

Model number	Layers	Voltage	Current	Certificates	Weight	Color
STC56ML	2	AC/DC12V	0.277A	CE DC24V only	0.29kg	● R-Red ● G-Green
STC56ML-BZ		AC/DC24V	0.188A		0.29kg	
STC56MLF	3	AC110V	0.057A		0.49kg	● R-Red ● A-Amber ● G-Green
STC56MLF-BZ		AC220V	0.028A		0.49kg	



Technical Diagram

(Units : mm)

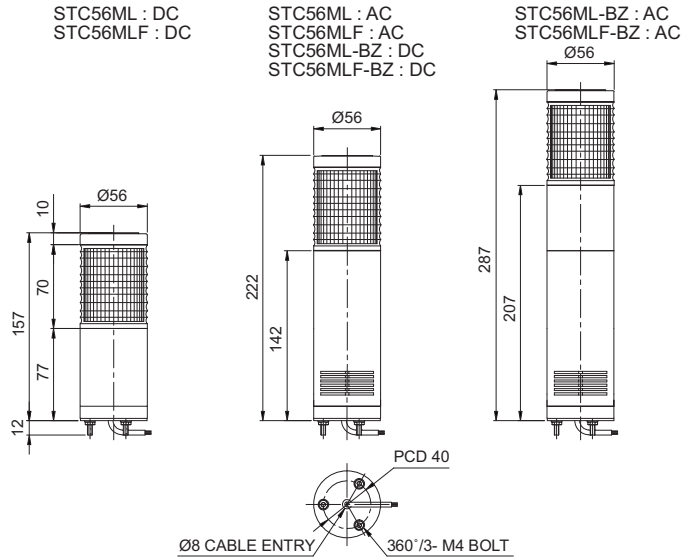

Wiring Instructions

- External power line : UL1015 AWG18(0.75sq)×2C 400mm
- External signal line : UL1007 AWG22(0.3sq) 400mm

※ Please refer to page 36 for detailed wiring instructions.



Customization

- 2 buzzer sound types : Both prolonged (beep, beep) and staccato (beep, beep, beep) buzzer output available
- 40mm lens height (Model number : STC56MEL)
- Wall mount bracket options : Bracket structure allows for threading through the bracket hole or into the wall



Wall Mount Bracket TWS45



Wall Mount Bracket TWA45



Ordering Specification

STC56ML	-	3	-	220	-	RAG
[Model number]		[Layers]		[Voltage]		[Color]
<ul style="list-style-type: none"> • STC56ML • STC56ML-BZ • STC56MLF • STC56MLF-BZ 		<ul style="list-style-type: none"> • 2-2 Colors • 3-3 Colors 		<ul style="list-style-type: none"> • 12-DC12V • 24-DC24V • 110-AC110V • 220-AC220V 		<ul style="list-style-type: none"> ● R-Red ● A-Amber ● G-Green