


# INSULATION CAPS

A

■ TIC CAP for non-insulated terminals

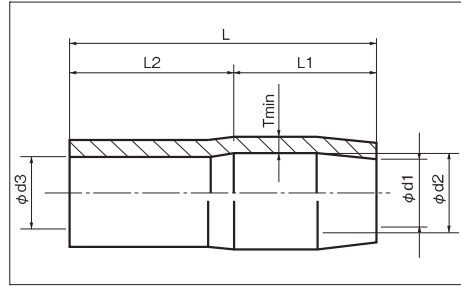

**RoHS 10**  
See page 2

PART NUMBER	DIMENSIONS mm							APPLICABLE TERMINAL NOMINAL SIZE	STD QTY/BAG
	ϕ d1	ϕ d2	ϕ d3	L	L1	L2	T		
<b>TIC 0.3</b>	2.2	2.4	2.0	13.0	6.0	7.0	0.6	0.3 (Wire size 0.3mm <sup>2</sup> )	1,000 (100×10)
<b>TIC 0.5</b>	2.2	2.6	2.6	13.0	—	—	0.6	0.3 (Wire size 0.5mm <sup>2</sup> )	
<b>TIC 0.75</b>	2.2	2.9	2.9	13.0	—	—	0.6	0.75	
<b>TIC 1.25</b>	2.8	3.3	3.1	13.0	6.0	7.0	0.6	1.25	
<b>TIC 2</b>	3.5	4.0	3.6	14.0	7.5	6.5	0.7	2.0	
<b>TIC 3.5</b>	4.4	4.7	4.2	17.0	9.3	7.7	0.8	3.5	
<b>TIC 5.5</b>	4.7	5.2	5.2	17.0	—	—	0.8	5.5	
<b>TIC 8</b>	5.8	6.8	6.2	19.0	11.3	7.7	1.0	8	500 (100×5)
<b>TIC 14</b>	7.8	9.2	8.0	24.0	13.2	10.8	1.1	14	100
<b>TIC 22</b>	9.5	12.0	9.5	29.0	15.0	14.0	1.2	22	
<b>TIC 38</b>	11.8	14.0	11.8	33.0	17.0	16.0	1.5	38	
<b>TIC 60</b>	13.5	16.2	14.0	39.0	20.0	19.0	1.5	60	
<b>TIC 80</b>	16.0	19.0	16.0	46.0	25.0	21.0	1.6	80	50
<b>TIC 100</b>	18.0	22.0	18.0	54.0	30.0	24.0	1.7	100	
<b>TIC 150</b>	23.2	25.0	21.5	65.0	35.0	30.0	1.8	150	
<b>TIC 200</b>	28.0	33.0	24.5	68.0	38.7	29.3	1.8	200	20
<b>TIC 250</b>	32.7	37.5	27.0	73.0	42.0	31.0	2.0	250 325 (Wire size 250mm <sup>2</sup> )	
<b>TIC 325</b>	32.2	37.5	30.1	75.0	42.5	32.5	2.0	325	

- MATERIAL : P.V.C.
- RATED VOLTAGE : 600V
- MAX. TEMPERATURE : 60°C
- COLOR : Red, White, Blue, Yellow,  
Black, Green, Transparent, Gray & Brown.

**NOTE** Color may change when applied to EP rubber insulated wire.