

**Time and light control**  
**Analogue time switches**

**Description**

- Analogue time switch
- 1 channel
- Daily program
- With power reserve
- 96 switching segments
- Quartz controlled
- Shortest switching time: 15 minutes
- Screw terminals
- Manual switch with 3 positions: Permanent ON/AUTO/continuous OFF



**Technical data**

SUL 180 a		SUL 180 a	
Operating voltage	230 - 240 V AC	Switching capacity at 250 V AC, cos φ = 0,6	4 A
Frequency	50 - 60 Hz	Incandescent/halogen lamp load	1000 W
Number of channels	1	Energy saving lamps	150 W
Width	1 modules	LED lamp < 2 W	30 W
Installation type	DIN rail	LED lamp 2-8 W	300 W
Type of connection	Screw terminals	LED lamp > 8 W	300 W
Drive	Quartz-controlled stepper motor	Shortest switching times	15 min
Program	Daily program	Programmable every	15 min
Power reserve	3 days	Time accuracy at 25 °C	≤ ± 1 s/day (quartz)
Switching capacity at 250 V AC, cos φ = 1	16 A	Type of contact	NO contact

Subject to technical changes and misprints

additional information at: [www.theben.de/product/1800001](http://www.theben.de/product/1800001)


The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

### Technical data


SUL 180 a	
Switching output	Potential-free and phase-independent
Number of switching segments	96
Stand-by consumption	~0.5 W
Capacity loss max.	0.7 W
Test approval	VDE

SUL 180 a	
Housing and insulation material	High-temperature resistant, self-extinguishing thermoplastic
Type of protection	IP 20
Protection class	II according to EN 60 730-1
Ambient temperature	-10°C ... 50°C

### Connection example

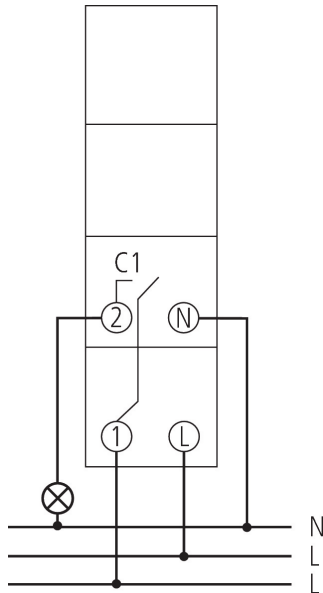

Scale drawings

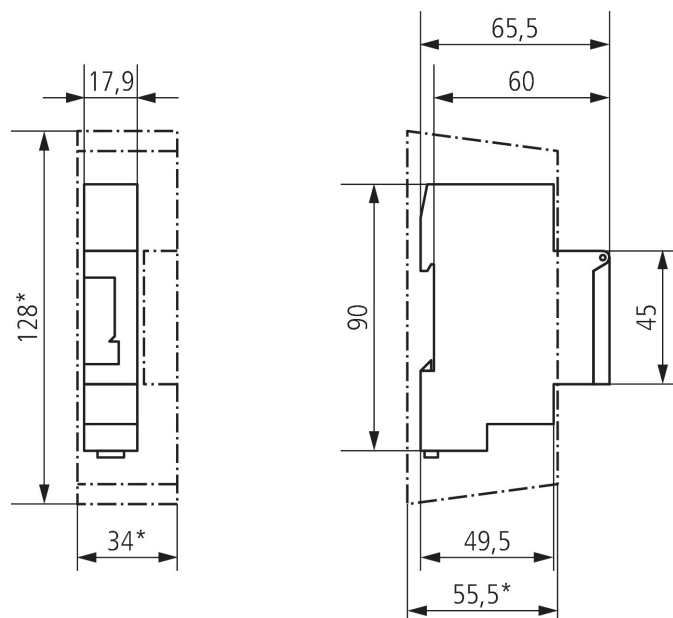

Accessories

Wall mounting kit 17,5 mm  
Item no.: 9070065



Front panel kit  
Item no.: 9070001

